



# **NetBurner Network Development Kit**

---

## **Programming Guide**

<b>1</b>	<b>INTRODUCTION .....</b>	<b>5</b>
1.1	HOW TO USE THIS GUIDE .....	5
1.2	SOURCE CODE FOR EXAMPLE PROGRAMS .....	5
1.3	HOW TO USE THE NETBURNER REFERENCE DOCUMENTS (IMPORTANT!) .....	5
1.4	NETBURNER NETWORK DEVELOPMENT KIT CONTENTS .....	5
1.5	GETTING STARTED .....	6
1.5.1	<i>Software Installation</i> .....	6
1.5.2	<i>Hardware Installation</i> .....	7
1.5.3	<i>Network Configuration</i> .....	7
1.5.4	<i>Debug Port</i> .....	8
<b>2</b>	<b>NETWORKING DEVICE CONFIGURATION .....</b>	<b>9</b>
2.1	OVERVIEW.....	9
2.2	OBTAINING AN IP ADDRESS .....	9
2.3	STATIC IP ADDRESS .....	9
2.4	DYNAMIC IP ADDRESS (DHCP) .....	9
2.5	NETWORK CONFIGURATION STEP BY STEP INSTRUCTIONS.....	9
<b>3</b>	<b>HOW DO I SELECT AN IP ADDRESS?.....</b>	<b>10</b>
<b>4</b>	<b>WEB BROWSERS AND PROXY SERVERS .....</b>	<b>11</b>
<b>5</b>	<b>USING THE NETBURNER IDE TO CREATE THE TEMPLATE PROGRAM .....</b>	<b>12</b>
5.1	IDE OVERVIEW .....	12
5.2	CREATE A NEW PROJECT WITH THE APPWIZARD .....	13
5.3	TEMPLATE PROGRAM SOURCE CODE .....	17
5.4	TEMPLATE PROGRAM SETUP .....	20
5.4.1	<i>Testing the RS-232 Debug Connection</i> .....	20
5.5	COMPILING AND RUNNING THE APPLICATION .....	21
<b>6</b>	<b>DHCP - DYNAMIC HOST CONFIGURATION PROTOCOL.....</b>	<b>22</b>
<b>7</b>	<b>CHANGING IP ADDRESSES AT RUN-TIME .....</b>	<b>24</b>
7.1	THE CONFIGURATION RECORD .....	24
7.2	READING THE CONFIGURATION RECORD.....	25
7.3	STATIC AND DHCP IP ADDRESS MODIFICATION EXAMPLE .....	26
<b>8</b>	<b>BASIC WEB SERVER FUNCTIONS .....</b>	<b>33</b>
8.1	INTRODUCTION .....	33
8.2	EDIT THE INDEX.HTM WEB PAGE.....	33
<b>9</b>	<b>INTERACTIVE WEB FORM EXAMPLE.....</b>	<b>35</b>
9.1	INTRODUCTION .....	35
9.2	HOW HTML FORMS WORK.....	35
9.3	COLLECTING USER INPUT: WEB FORMS VS. URL'S .....	36
9.4	APPLICATION OBJECTIVES.....	36
9.5	APPLICATION FILES .....	36
9.6	INTERACTIVE WEB FUNCTIONS .....	36
<b>10</b>	<b>TCP VS UDP.....</b>	<b>43</b>
<b>11</b>	<b>TCP - TRANSMISSION CONTROL PROTOCOL .....</b>	<b>45</b>
11.1	TCP SERVER INTRODUCTION .....	45
1	WRITING A NETBURNER TCP SERVER .....	46
11.1.1	<i>NetBurner TCP Server Application Source Code</i> .....	47

11.1.2	<i>Running the NetBurner TCP Server Application</i> .....	49
2	<b>WRITING A WINDOWS TCP SERVER</b> .....	51
11.1.3	<i>Windows TCP Server Application Source Code</i> .....	52
11.1.4	<i>Running the Windows TCP Server Application</i> .....	56
3	<b>WRITING A NETBURNER TCP CLIENT</b> .....	56
11.1.5	<i>NetBurner TCP Client Application Source Code</i> .....	58
11.1.6	<i>Main.cpp</i> .....	58
11.1.7	<i>ClientWeb.h</i> .....	60
11.1.8	<i>ClientWeb.cpp</i> .....	60
11.1.9	<i>Index.htm</i> .....	63
4	<b>NETBURNER TCP CLIENT APPLICATION OPERATION</b> .....	64
<b>12</b>	<b>UDP - USER DATAGRAM PROTOCOL</b> .....	<b>65</b>
12.1	<b>WRITING A NETBURNER UDP CLIENT/SERVER APPLICATION</b> .....	65
12.1.1	<i>NetBurner UDP Application Source Code</i> .....	66
12.1.2	<i>Running the Application</i> .....	69
12.2	<b>WRITING A WINDOWS UDP CLIENT/SERVER APPLICATION</b> .....	69
12.2.1	<i>Windows UDP Application Source Code</i> .....	70
12.2.2	<i>Running the Windows UDP Application</i> .....	75
12.3	<b>WRITING A WINDOWS JAVA UDP CLIENT/SERVER APPLICATION</b> .....	75
12.3.1	<i>Windows Java UDP Application Source Code</i> .....	75
12.3.2	<i>Running the Windows Java UDP Application</i> .....	79
<b>13</b>	<b>UC/OS REAL-TIME OPERATING SYSTEM</b> .....	<b>80</b>
13.1	<b>OVERVIEW</b> .....	80
13.2	<b>PRE-EMPTIVE OPERATION AND BLOCKING</b> .....	80
13.3	<b>DEFAULT CONFIGURATION AND RESOURCES</b> .....	81
13.4	<b>CREATING TASKS</b> .....	81
13.5	<b>INTERRUPTS</b> .....	83
<b>14</b>	<b>PROTECTING SHARED DATA STRUCTURES</b> .....	<b>84</b>
14.1.1	<i>Overview</i> .....	84
14.1.2	<i>Semaphore Example</i> .....	85
14.1.3	<i>Mailbox Example</i> .....	87
14.1.4	<i>FIFO Example</i> .....	89
14.1.5	<i>OSCritObject Example</i> .....	91
<b>15</b>	<b>FILE DESCRIPTORS</b> .....	<b>92</b>
15.1	<b>OVERVIEW</b> .....	92
15.2	<b>CREATING CUSTOM I/O DRIVERS USING FILE DESCRIPTORS</b> .....	92
15.3	<b>USING FILE DESCRIPTORS TO PEND ON MULTIPLE EVENTS</b> .....	93
15.4	<b>EXAMPLE: CIRCULAR BUFFER IMPLEMENTATION USING FILE DESCRIPTORS</b> .....	93
<b>16</b>	<b>MULTIPLE NETWORK INTERFACES</b> .....	<b>98</b>
16.1	<b>MULTIPLE HARDWARE INTERFACES (ETHERNET, WiFi, PPP)</b> .....	98
16.1.1	<i>WiFi Interface Example</i> .....	98
16.2	<b>MULTI-HOME</b> .....	101
16.2.1	<i>Multi-Home Example Program</i> .....	101
<b>17</b>	<b>USING THE COLDFIRE PROCESSOR ON-CHIP SRAM ON THE NETBURNER PLATFORM</b> .....	<b>104</b>
17.1	<b>INTRODUCTION</b> .....	104
17.2	<b>HOW TO USE THE SRAM IN YOUR APPLICATION</b> .....	104
17.3	<b>OPTION 1: MODIFYING THE SYS.LD LINKER SCRIPT</b> .....	104
17.4	<b>OPTION 2: CREATING A POINTER TO A STRUCTURE</b> .....	105
<b>18</b>	<b>THE TEMPLATE PROGRAM – COMMAND LINE MODE</b> .....	<b>107</b>

18.1 TEMPLATE PROGRAM SOURCE CODE .....109

18.2 COMPILING AND RUNNING THE APPLICATION - OVERVIEW .....110

18.3 CREATING A MAKEFILE.....110

18.4 COMPILING THE APPLICATION.....111

18.5 TEMPLATE PROGRAM SETUP .....111

    18.5.1 *Testing the RS-232 Debug Connection*.....112

**19 SOFTWARE LICENSING .....113**

    19.1 NETBURNER LICENSE AGREEMENT.....113

    19.2 THE NETBURNER TOOLS SOFTWARE LICENSE .....113

    19.3 THE NETBURNER EMBEDDED SOFTWARE LICENSE.....114

**20 NETBURNER CONTACT INFORMATION.....114**

**21 NETBURNER SUPPORT INFORMATION .....114**

# 1 Introduction

## 1.1 How to Use This Guide

The NetBurner Programming Guide is intended to provide an overview of the features and capabilities of the NetBurner Network Development Kit. The primary goal of this guide is to provide a brief explanation of common network applications and illustrate how you can implement these applications using NetBurner hardware, software and development tools.

The approach of this guide is to learn by example. The first program example, called Template, can be used as a starting point for most applications, and each application in this guide uses it as a base.

This guide should be useful to those new to embedded networking, and to experienced network professionals who are unfamiliar with the NetBurner tools.

## 1.2 Source Code for Example Programs

Source code for all the examples in this manual, as well as the latest manual revision, can be downloaded from <http://www.netburner.com> in the “support” section.

## 1.3 How to Use the NetBurner Reference Documents (IMPORTANT!)

There are a number of very useful resources available:

- The NetBurner **NNDK Users Manual** contains the function API documents. It is located in \nburn\docs, or from the start menu at: Start -> Programs -> NetBurner NNDK -> NNDK Users Manual.
- The hardware platform documentation specific to the hardware you purchased with the development kit. This is located at in \nburn\docs\platform\<platform.chm>, or from the start menu: Start -> Programs -> NetBurner NNDK -> Platform -> <platform.chm>
- Your support account at <http://support.netburner.com>
- The NetBurner public newsgroup located at groups.yahoo.com

## 1.4 NetBurner Network Development Kit Contents

Your development kit contains everything you need to immediately begin writing network applications:

- NetBurner Hardware Platform
- uC/OS Real-Time Operating System
- NetBurner TCP/IP Stack
- NetBurner Web Server
- Integrated Development Environment (IDE)
- GNU C/C++ Compiler
- GDB/Insight Debugger
- NetBurner Configuration Utilities including IPSetup and AutoUpdate
- Power Supply
- Serial Cable, Standard Network Cable (blue) and Cross-wired Network Cable (red)

## **1.5 Getting Started**

This guide will provide an overview of how to install and configure your NetBurner tools and devices, but please refer to the Quick Start Guide and User Manual (from Windows: Start → Programs → Netburner NNDK → NNDK Users Manual) that came with your development kit for additional details.


### **1.5.1 Software Installation**

NetBurner software and tools run on Windows NT 4.0, 2000, and XP. Insert the CD into the CD-ROM drive. The Autorun feature should automatically start the install. If it does not, run “setup.exe” from the CD-ROM.


## 1.5.2 Hardware Installation

Your Network Development Kit includes one of several possible NetBurner hardware platforms. Each platform will require a power connection, an Ethernet network connection, and an optional serial connection. Please refer to the Quick Start Guide that came with your hardware platform for detailed instructions. Once the hardware installation is complete, you should have the equivalent of one of the two block diagrams below:

Connection using cross-over Ethernet cable (red):

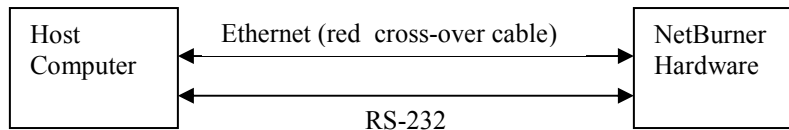


Connection using standard (blue) Ethernet cables:

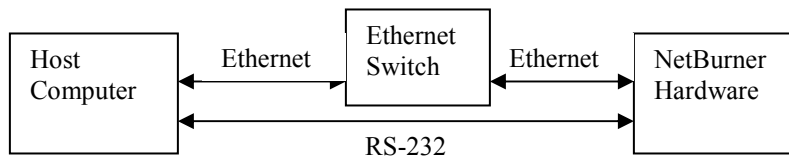


## 1.5.3 Network Configuration

Once the hardware and software installations are complete, you will need to either verify automatic network settings, or assign static network settings of the NetBurner device.

1. Verify the hardware is connected correctly. A link light is located near the RJ-45 Ethernet connector on your NetBurner board. The link light will be lit if the network cable is connected correctly to both the host computer and the NetBurner device. **Note:** If the link light is not lit, network communication will not be possible.
2. Run the NetBurner IPSetup program. (From Windows: Start → Programs → Netburner NNDK → IP Setup tool.) IPSetup will allow you to view your NetBurner device's current settings, or modify the settings. If you are using DHCP, then the values in the left pane in the IP Setup window will be zero, and the IP address assigned by the DHCP server will appear in the "Select a Unit" pane as shown below. The name following the IP address indicates the NetBurner platform name. If your running application supports a web interface, the "Launch Webpage" button will open up (when clicked) your default web browser to display your NetBurner device's home page.

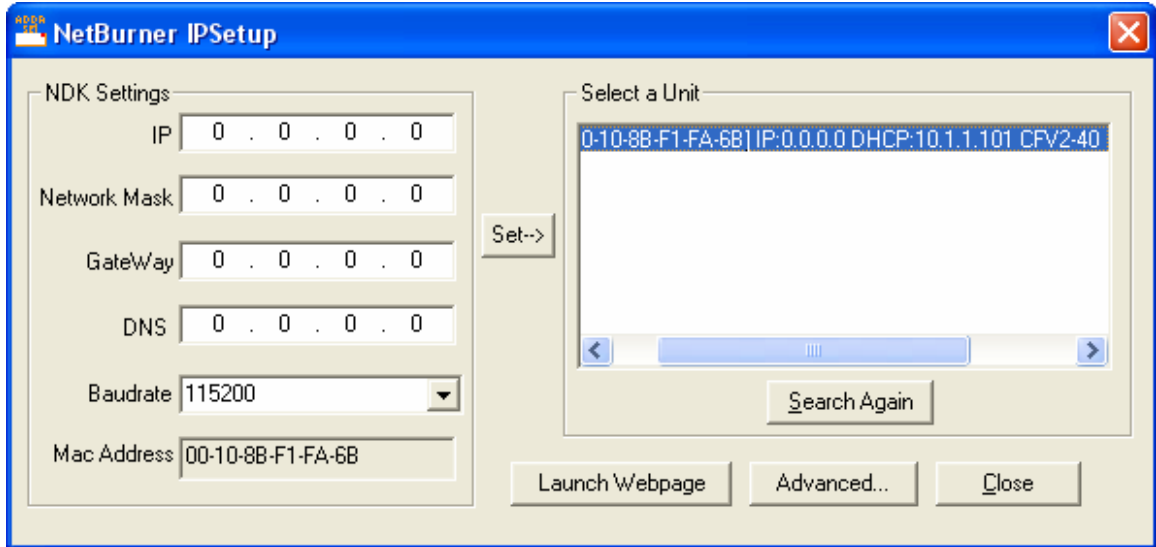

3. If you wish to assign a static IP address, enter the information into the “NDK Settings” pane (as shown below) and click on the “Set” button. There will be a short pause while parameters are updated. If you do not see your device in the “Select a Unit” window, click on the “Search Again” button. If your running application supports a web interface, the “Launch Webpage” button (when clicked) will open up your default web browser to display your NetBurner board’s home page.

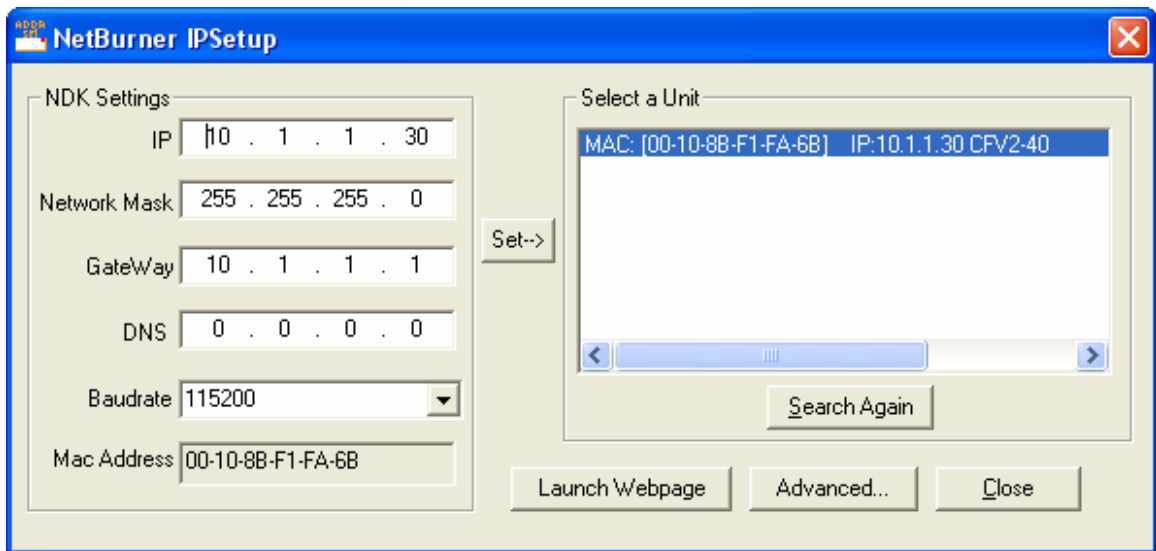

### 1.5.4 Debug Port

Throughout this guide, we will refer to the “debug port”. The debug port is one of the RS-232 ports that can be used to interact with your NetBurner device in the example programs. By default stdout, stdin and stderr are mapped to the debug port, so when you use functions like printf( ), scanf( ), gets( ), etc. they read and write to the debug port. All of this is configurable. You can also disable the debug port and use the port as a general purpose UART, or you can reassign the stdio file descriptors to use other serial or network interfaces.



## 2 Networking Device Configuration

### 2.1 Overview

The NetBurner hardware and software solution supports Ethernet and PPP network connections. The Ethernet connection is made through the RJ-45 connector on your NetBurner device, which then will connect directly to your host computer (use the red crossover cable for direct connections without a hub, switch or router), to your Local Area Network (LAN) through a hub, switch or router, the Internet, or both. A PPP connection can be made using a RS-232 serial port as a hard-wired connection, or through a modem. The NNDK supports the modem initialization for a ZOOM 56K modem. If you are using a different modem, you may need to modify the modem initialization string. Contact the manufacturer of your modem for additional information.

### 2.2 Obtaining an IP Address

To get your NetBurner Network Development Kit (NNDK) up and running as quickly as possible, you must have an IP Address for both your host computer and your NetBurner device. The NetBurner factory application supports both static and DHCP assigned IP addresses.

### 2.3 Static IP Address

If you are part of an existing network and want to use a static IP address, you must get the address from your network administrator. If you connecting your NetBurner hardware to a single computer, or are on an isolated network, you should select one of the reserved addresses described in the “How do I select an IP address” section of this guide.

### 2.4 Dynamic IP Address (DHCP)

When the factory program boots, it will first attempt to obtain an address from a DHCP server. If you are connected to a network with a DHCP server, everything should get configured automatically.

### 2.5 Network Configuration Step by Step Instructions


1. Get a static IP address, or use DHCP.
2. Install the NetBurner Development Tools on your host computer.
3. Connect the 12 VDC power supply (US and Canadian customers only) to the board by inserting the P5 male connector on the power supply cord into the P5 female connector on the board assembly (on the edge of the board near the DB-9 connector). Please refer to your Quick Start Guide for additional information.
4. If you are part of an existing network, or are using a hub: Use the blue RJ-45 patch cord to connect your NetBurner board to an unused network jack or hub port. **Note:** You cannot use the blue patch cable to connect directly to a network card in a computer. When finished, skip to step 6.
5. If you do not have a hub and want to connect directly to your host computer: Use the red RJ-45 patch cable to connect your NetBurner board to your host computer. **Note:** You cannot use the red patch cable to connect to a network hub or existing network jack.
6. Plug in the power supply (120VAC input).

7. Execute the IPSetup.exe program. From the Windows: Start→ NetBurner→ IPSetup tool. (If you used the default installation settings, the program is located in the C:\nburn\pctools\ipsetup directory).
8. The IPSetup program will automatically locate all NetBurner devices on your network. If more than one device appears, select your device by matching the MAC address displayed in IPSetup with the MAC address sticker on your NetBurner board.

**If using a static IP address:** Enter your IP Address and Mask in the corresponding IPSetup text boxes. For example, if you are on an isolated network, the IP Address could be 10.1.1.11 and the Mask could be 255.255.255.0 (see “How Do I Select an IP Address”). Select the “Set” button to send the modifications in the CFV2-40.

**If using DHCP:** Verify that the IP address and mask have been set.

9. Your NetBurner hardware is now configured! Simply click on the “Launch Webpage” page button in the IPSetup window to view the factory application.

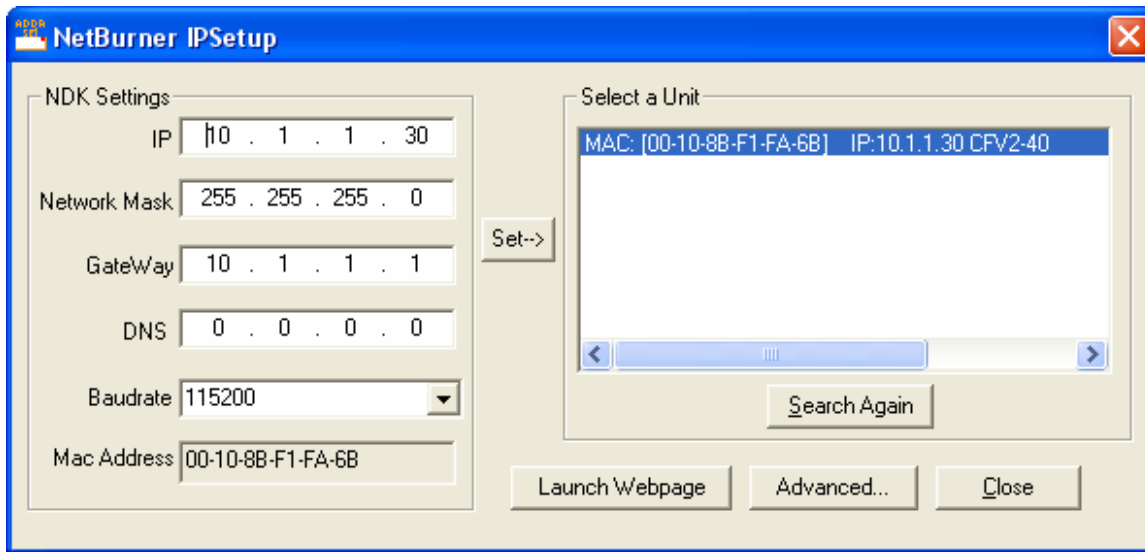

For additional information, please refer to your User Manual. From the Windows Start Menu: Start→ Programs→ NetBurner NNDK→ NNDK Users Manual.

### 3 How Do I Select an IP Address?

If you are part of an existing network and are not using DHCP, stop reading now and go get an IP address and network mask from your network administrator. If you follow the advice in this paragraph on an existing network without an assigned IP address, the Administrator will hunt you down.....

IP addresses are used to route packets from place-to-place on Intranets/Internet. If you are not part of an established network, and your Ethernet segment is isolated, you can choose just about any IP address you desire.

The powers that be have actually set aside some addresses for isolated networks. They are documented in [RFC1918](http://www.ietf.org/rfc/rfc1918.txt). The reserved ranges are:

- 10.0.0.0 to 10.255.255.255 Class A
- 172.16.0.0 to 172.31.255.255 Class B
- 192.168.0.0 to 192.168.255.255 Class C

If you are doing development on an isolated network, you can use the following addresses (they will be used for all of the examples in the documentation):

- Set Your PC's Network Adapter Card IP Address to 10.1.1.10 (only change the Network Adapter Card, **do not** change your Dial-Up Adapter settings)
- Set the IP address of the NetBurner board to 10.1.1.11
- Set the network mask for both the PC network adapter and the NetBurner board to 255.255.255.0

## 4 Web Browsers and Proxy Servers

If you are working on a corporate LAN that uses a proxy server for Internet web browsing, you will need to **exclude** the IP address of your NetBurner hardware in your web browser's proxy server settings/preferences. Otherwise, an attempt to connect to a web page on the LAN will fail because the proxy server will attempt to route the request outside the LAN. For most web browsers, this can be accomplished in the advanced settings for the proxy server configuration. If you are using IE 6.x, click on Tools → Internet Options → Connections → LAN Settings → Proxy server. For additional information, please contact your IT Department.

## 5 Using the NetBurner IDE to Create the Template Program

This section serves as both an introduction to the IDE as well as describing how to create a simple network application program that can be used as a template for more complex applications. By the end of this section you will know how to create a project, compile and application and download the application to your NetBurner device.

If you prefer command line tools, you can do all of your development using the make utility. Please see the section entitled “Using the NetBurner Command Line Tools to Create the Template Program” for details.

Traditionally called the “Hello World” program, the “Template Program” will specify a minimal code base from which you can write your future applications. The objective of this template program is to print the characters “Hello World” out the debug port of your NetBurner device. In addition, this template program will enable network services so that it can be downloaded over a network connection instead of through a serial port or a BDM (Background Debug Mode) port.

### The Debug Monitor

The NetBurner device contains a flash memory boot sector loaded with a boot program called the “Debug Monitor”. This program is designed to be very small and takes up less than 16 Kbytes of memory space. The Debug Monitor is not designed to provide full TCP network communications, although it does support the TFTP protocol.


The full TCP/IP Stack functionality is compiled as part of your application. If you download an application that immediately crashes when it boots, full network services will not be available. In this case, the NetBurner Debug Monitor comes to the rescue. Once in the Debug Monitor (at the NB> prompt), you can download a working application through the serial debug port. See the section on serial downloads using the Debug Monitor for more information.

### 5.1 IDE Overview

The Integrated Development Environment (IDE) enables you to create, edit, compile and download applications to your NetBurner device.

Features include:

- An Application wizard for creating new applications
- The ability to create new projects for existing applications
- Project Manager
- Customizable syntax highlighting
- Compile, link and download applications in one easy step
- Class browser
- Function Listing

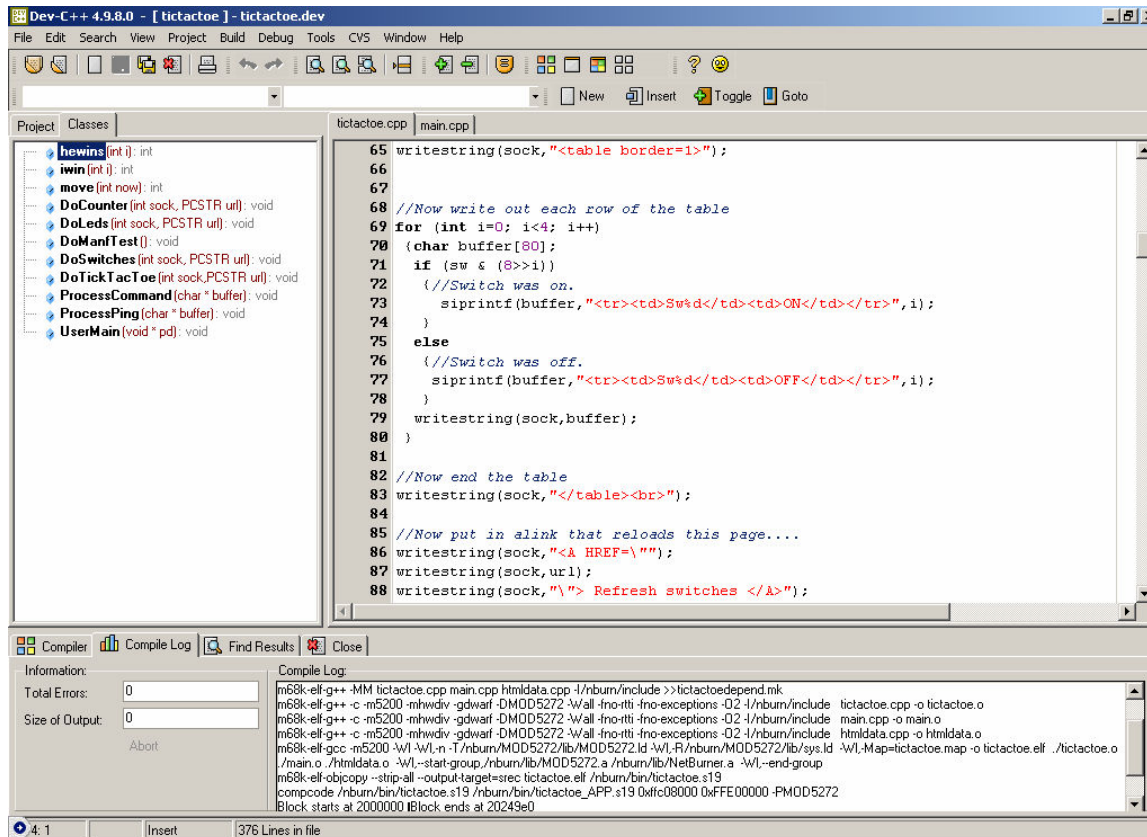

## 5.2 Create a New Project with the AppWizard


The NetBurner Application Wizard will create a project and C/C++ source code for your application. This is a great way to start a new project since you can add functions like DHCP and HTML processing by selecting the appropriate checkbox items in the AppWizard dialog box.

### Using C++ File Extensions


Throughout this manual, we will always use the .cpp extension to indicate the source files are C++. This is done to take advantage of the benefits of the C++ compiler as well as support those programmers using C++. **Note:** You do not need to know any C++ to use the NetBurner Development Kit, and the majority of examples in this guide do not use C++.

To create a new project:

1. Create a project directory on your hard drive. For example, you could use windows explorer to create a directory called c:\netburner\myapp.
2. Start DevC++ from the Windows start menu: Start->Programs->NetBurner NNDK->DevC++
3. From the DevC++ main menu, select File->New->AppWizard, as shown below:

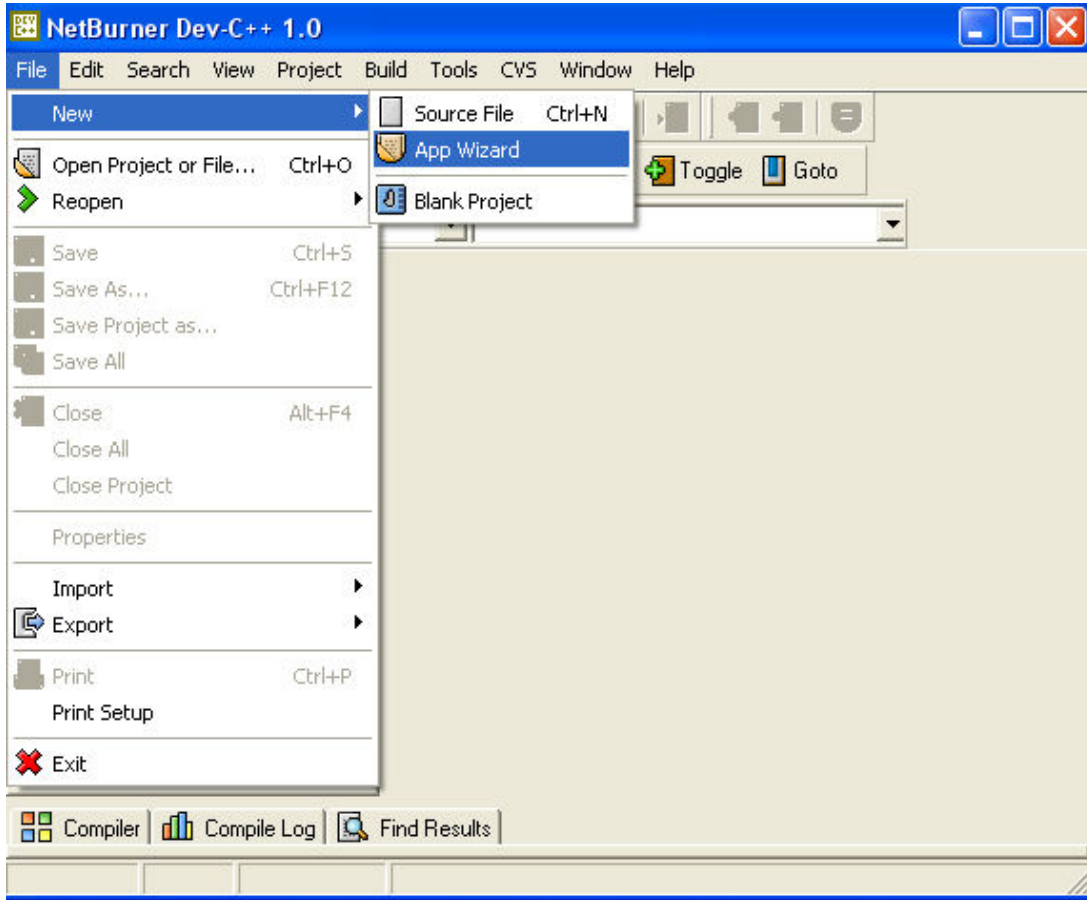


The New Project dialog box will then appear as shown below:

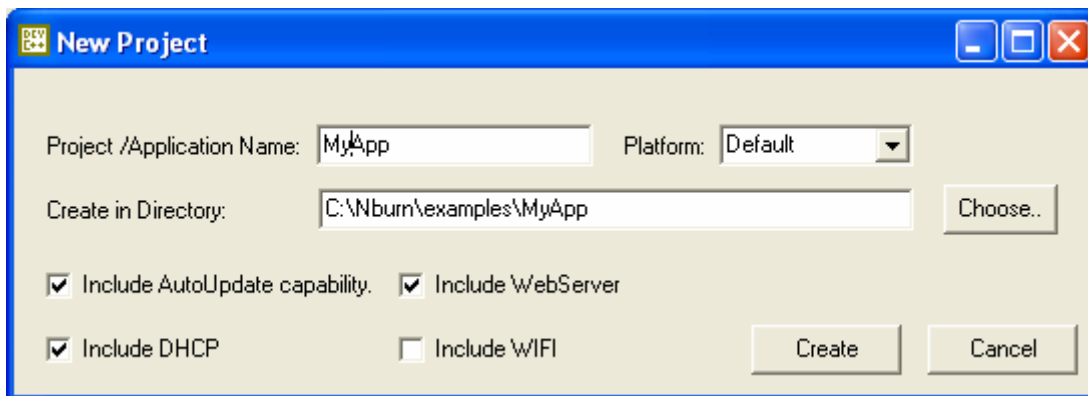

4. Change the default name in the Project/Application Name field.
5. Use the “Choose” button to select the directory you created earlier.
6. Selecting the AutoUpdate checkbox will enable you to download your application code from the IDE directly to the NetBurner device.
7. Selecting the Include DHCP checkbox will enable your device to use both DHCP and static IP addressing.
8. Selecting the Include Webserver checkbox will cause your application to start the web server, as well as create a html directory in which your html files will be stored and edited.

Note that all the above options are used to create C/C++ source code for your application. If you change your mind about any of these features you can easily modify the source code to remove them or change the functionality.


The AppWizard will create a number of files, as shown below:

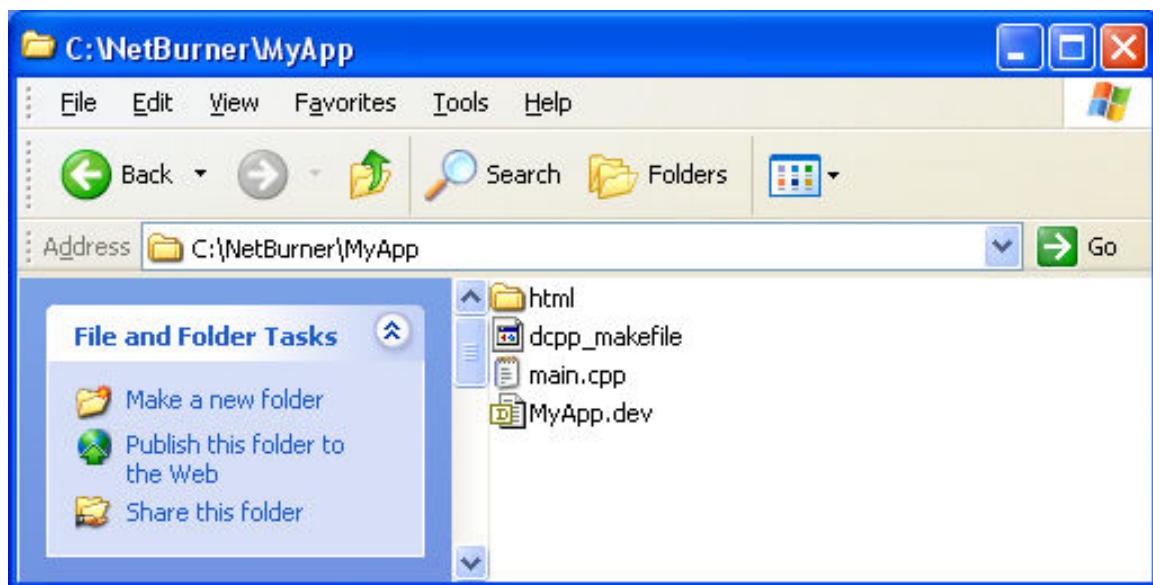

- main.cpp is the C/C++ source code file containing UserMain(), the main thread of the application.
- The dcp\_makefile is the project makefile. You do not need to edit or view this file.
- MyApp.dev is the DevC++ project file. You do not need to edit or view this file.
- The html subdirectory is where you will store any HTML files for your application.

That's it! You have created a project and application code that can now be compiled and run. It will serve as a base for future customizations. Note that this is a full featured network application that includes the TCP/IP Stack, Web Server, RTOS and network code update capability.

Your DevC++ screen should now look like the screenshot below:

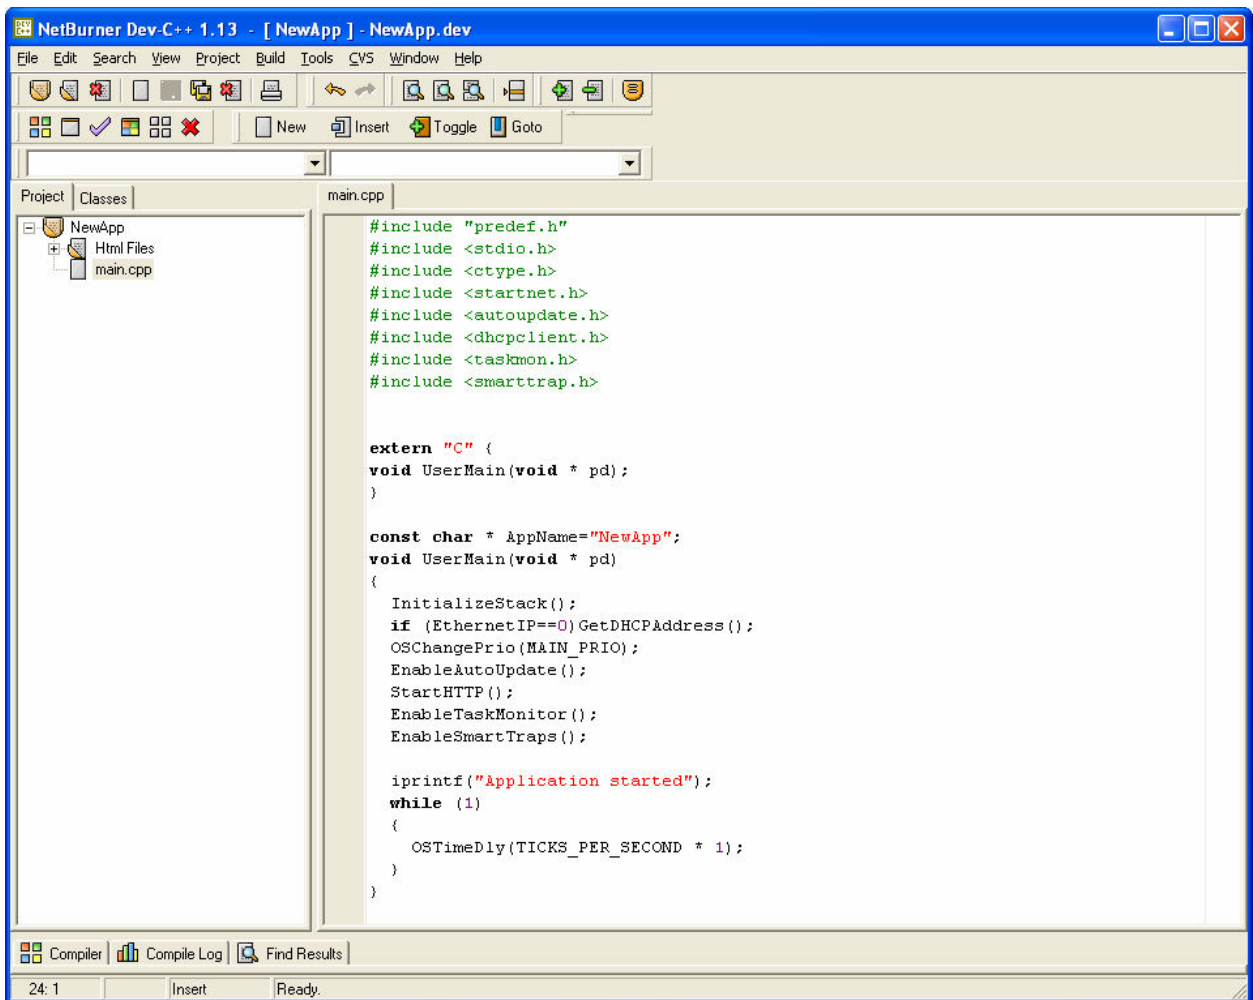



### 5.3 Template Program Source Code

While in the DevC++ project view, edit the top of the file to add the Template header description as shown below. Comments have been added to the source code to explain the function of each section.

```

/*-----
Description: The Template Program
Filename: main.cpp
-----*/
#include "predef.h"
#include <stdio.h>           // standard input and output functions
#include <ctype.h>           // char types
#include <startnet.h>        // required for network communications
#include <autoupdate.h>      // required for AutoUpdate functionality
#include <dhcpclient.h>     // required for DHCP operation
#include <taskmon.h>        // required for EnableTaskMonitor()
#include <smarttrap.h>      // required for EnableSmartTraps()

extern "C" {
    void UserMain(void * pd);
}

const char * AppName="MyApp";

void UserMain(void * pd)
{
    InitializeStack();           // Init TCP Stack
    if (EthernetIP==0)GetDHCPAddress(); // Get DHCP address if necessary
    OSChangePrio(MAIN_PRIO);    // Set UserMain task priority
    EnableAutoUpdate();         // Enable network code downloads
    StartHTTP();                // Start web server
    EnableTaskMonitor();        // Optional: Enable RTOS task scan for debug
    EnableSmartTraps();         // Optional: Enable smart traps. Cannot be used
                                // with GDB/Insight Debugger

    iprintf("Application started");
    while (1)
    {
        iprintf("Hello World\r\n"); // integer version of printf()
        OSTimeDly(TICKS_PER_SECOND * 1); // Delay 1 second
    }
}

```

The above program is a fully functional network application in just a few lines of code! The only application specific code is inside the `while (1)` loop; the remainder of the program is what we will refer to as the “Template Program”. Although the purpose of our application is to print “Hello World” out the debug serial port, adding the network support will allow fast code development using the NetBurner “make load” build command, and also allow network configuration using the NetBurner IPSetup utility (i.e. IPSetup tool). For additional information on IPSetup and AutoUpdate please refer to your NNDK User Manual. From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.

The “extern C” declaration is used to so that `UserMain()` is compatible with both C and C++ applications; it prevents the name mangling associated with C++.

```

extern "C" {
    void UserMain(void * pd);
}

```

The line: `const char * AppName="MyApp";` will enable the IPSetup utility to display the application name. You can change MyApp to any string you wish. If this variable is not set, IPSetup will not display a value for this field.

The UserMain() function is a thread created by the system to be your application's main entry point for taking control over the function of the device. The parameter passed to UserMain() is a void pointer to some type of data. This is a feature of the uC/OS RTOS, but it is not needed for the NetBurner tool set.

The next group of function calls handle system initialization:

```
InitializeStack();
if (EthernetIP == 0) GetDHCPAddress();
OSChangePrio(MAIN_PRIO);
EnableAutoUpdate();
StartHTTP();
```

InitializeStack() initializes the TCP/IP Stack. This is required for any network communications to take place.

The line: `if (EthernetIP == 0) GetDHCPAddress();` checks the NetBurner device's IP address setting, and if the IP address is 0.0.0.0, the device will attempt to contact a DHCP Server and obtain a dynamic IP configuration, including the IP address, mask, gateway and DNS Server.

#### **What if DHCP fails?**

If you run IPSetup and notice that the IP address of your device is 0.0.0.1, this is an indication that a DHCP Server could not be found on your network. The DHCP Client runs as a separate task, so it will keep trying to get a DHCP address until it succeeds, or the application explicitly calls StopDHCP();.

The function call OSChangePrio(MAIN\_PRIO) sets the UserMain task priority to the default, which is 50. The RTOS has a total of 63 priority levels. Level 1 is the highest, and level 63 is the lowest priority. In a preemptive RTOS, the highest priority task ready to run will execute. For example, the TCP/IP stack task is a higher priority task (lower priority number), and will interrupt UserMain() when necessary to process network data.

Some of the tasks are reserved. For example, task 63 is the system idle task, which runs when no other tasks are ready to run. The system defines the following tasks in `\nburn\include\constants.h`:

```
#define MAIN_PRIO (50)
#define HTTP_PRIO (45)
#define PPP_PRIO (44)
#define TCP_PRIO (40)
#define IP_PRIO (39)
#define ETHER_SEND_PRIO (38)
```

In addition, task 0 and task 63 are reserved. Tasks available for user applications are any of the remaining task priority numbers. Some network modules such as FTP and Telnet Command will also use task priorities, but the priority will be an option passed to the function that starts the task.

**Always check the return value when creating a task!**

If you call a function that creates a new task and you specify a task priority that is already in use, the function will return an error.

An easy way to keep track of priority levels for user applications is to use the `MAIN_Prio` definition and add or subtract a number from it. For example, if you create a new task and want it to be of higher **priority** than `UserMain`, then use `(MAIN_Prio - 1)`. If you want it to be of lower **priority**, then add 1, etc.

The function `EnableAutoUpdate()` will enable the network flash memory update capability of the device. The `AutoUpdate` utility is used both during development to quickly download code to flash memory, and also as an update mechanism once the device is deployed.

The `StartHTTP()` function starts the HTTP Web Server task. When you build your project, the web page data in your project's "html" directory will be processed and made available to be served up as a web page. For example, you will probably have a web page called "index.htm". The `StartHTTP()` function will start a task that listens on port 80 for incoming HTTP requests such as those from a web browser. An optional parameter may be passed to the function to select a different port number. For example, `StartHTTP(81)` will start the Web Server and tell it to listen on port 81. `StartHTTP()` may only be called once.

The `EnableTaskMonitor()` enables `TaskScan`, a network debugging tool that is used to view tasks and their status in a running application. To use `TaskScan` you must add `#include <taskmon.h>` in your application's `main.cpp` file and `EnableTaskMonitor()` in user `main`. When the `TaskScan` utility is run on your Windows computer you can view the running tasks, their status and current source code line number. There are no performance hits if you include `TaskScan` in your application; the only time it will be invoked is when you run the `TaskScan` utility and connect to your netburner device. `TaskScan` is covered later in this manual.

The NetBurner system will catch programming errors that cause traps, such as null pointers, and display debug information such as the program counter, address registers and data registers. The `EnableSmartTraps()` function call provides more detailed debugging information when a trap occurs, such as the RTOS task information. Note that if you are using GDB/Insight Debugging, `EnableSmartTraps()` must be called before the GDB stub function.

The inside of the while loop is where you would place your application code:


```
while (1)
{
    iprintf("Hello World\r\n"); // integer version of printf()
    OSTimeDly( TICKS_PER_SECOND * 1 );
}
```

The `iprintf()` and `OSTimeDly(20)` are just there for the example; you would replace those lines with whatever you want your application to do. Note that you should never return from this while loop; if you did, then your application would lose control of the hardware.


## 5.4 Template Program Setup

Before running our program, let's make sure your hardware is set up correctly. To run the Template program, you will need your hardware to be set up as shown below:

Connection using cross-over Ethernet cable (red):

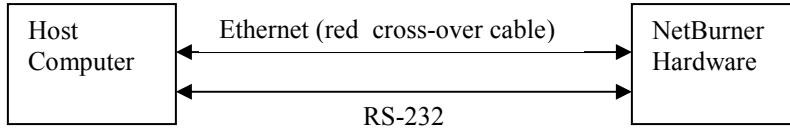

Connection using standard (blue) Ethernet cables:

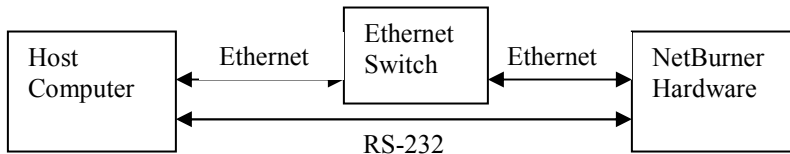

The Ethernet connection should be between your host computer and your NetBurner device's RJ-45 connector. The RS-232 connection should be made between your host computer's Serial port and the Debug Serial port of your NetBurner device. The Serial port connection on the NetBurner device will vary with each hardware platform, but it should be a DB9 connector on the processor board itself, or on a separate Adapter board or Carrier board supplied with your kit. Please refer to your Quick Start Guide for additional details on how to "make" and download files to your NetBurner device.

### 5.4.1 Testing the RS-232 Debug Connection

You can determine if you are properly connected to the debug port with the following test:

1. Start the dumb terminal program MTTY, which is included in your NetBurner tools. You can start it from within the IDE "Tools" menu, or from the Windows start menu: Start → Programs → Netburner NNDK → MTTY Serial Terminal. Set the com port to whichever port you are using on your computer (usually com1), and set the baud rate to 115,200. Make sure to click on the "Connect" button in the MTTY window to establish the connection.
2. Power on or reset your NetBurner device. The MTTY screen should display a sign-on message similar to: "Waiting to boot.....". If you see this message, then you are connected correctly.

For additional information, please refer to your User Manual. From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.

## 5.5 Compiling and Running the Application

Now that we have the application source code file, we need to compile it into a code image and download it to your NetBurner device. There are four methods to download your applications:

1. Through the serial port
2. Through a network connection using AutoUpdate. This is the preferred method, and can be run from within the IDE, or as a stand-alone application.
3. Through a network connection using TFTP
4. Through a network connection using FTP

In this example, we will use the AutoUpdate method from within the IDE. In order to run your application on your NetBurner device you will need to do the following:

1. Compile the source code into an application image
2. Download the application image to the flash memory of the NetBurner device
3. Reboot the NetBurner device so the application can begin execution

Thankfully, this is a very simple process that can be accomplished with a single build command. From the IDE main menu, select “Build → Compile & Load” (or use the F9 shortcut key). A dialog box will appear, showing the compile status, followed by a progress bar that shows the progress of the download. Once the download is complete, you will see the debug messages appear in MTTTY, along with “Hello World”.

### Flash and RAM application files

When your code compiles correctly, two files are created: `template.s19` and `template_APP.s19`. The `template.s19` file is memory mapped to run from RAM, while `template_APP.s19` is memory mapped to run from Flash memory. **Note:** All compiled images will be located in the `c:\nburn\bin` directory. This guide will focus on Flash downloads. Please refer to the section on Downloading to RAM in your User Manual for more information on downloading applications to RAM. (From Windows: Start → Programs → NetBurner NNDK → NNDK Users Manual.)

## 6 DHCP - Dynamic Host Configuration Protocol

DHCP is used to provide host configuration parameters on a TCP/IP network. DHCP is built on a client-server architecture in which one or more designated DHCP Servers allocate network addresses and other configuration information to hosts (DHCP Clients). **Note:** All NetBurner devices can function as a DHCP Client. For additional information about DHCP, please refer to your NNDK User Manual. From Windows: Start → Programs → NetBurner NNDK → NNDK Users Manual.

To enable DHCP Client services, your application code must contain DHCP Client API function calls to enable the service. DHCP can dynamically configure many parameters, including:

1. IP Address
2. Subnet Mask
3. Gateway Address
4. DNS Server Address

The example code below checks the first interface, but you can modify it to check for the second or third interfaces. Typically the first interface will be your primary Ethernet interface. To use the network interface functions, you must include `netinterface.h`.


```
// Get first interface identifier. Use GetNextInterface(<last interface>) to
// obtain additional interface numbers if necessary.
int FirstInterface = GetFirstInterface();
InterfaceBlock *ib = GetInterfaceBlock(FirstInterface); // Get interface data

if (ib->netIP == 0) // Check IP address for 0.0.0.0, and use DHCP if necessary
{
    iprintf("\r\nNo static IP address set, attempting DHCP\r\n");
    if ( GetDHCPAddress( FirstInterface ) == DHCP_OK )
    {
        iprintf("DHCP address: "); ShowIP(ib->netIP); iprintf("\r\n");
    }
    else
    {
        iprintf("Error: could not obtain a DHCP address\r\n");
    }
}
}
```

The code checks the interface block variable `ib->netIP` to determine if the host IP address is 0. If the IP address is 0, then the DHCP Client should be invoked to obtain a dynamic IP parameters. If `EthernetIP` is not 0, then the system assumes a static IP address has been assigned, and DHCP is not used.

In previous tools releases that did not include multiple network interface support, a global variable named `EthernetIP` was used to access the Ethernet IP address of the device. While this variable will still work for backward compatibility, it is recommended that the interface functions be used for all new applications.

An easy way to check your NetBurner board to determine if it has a DHCP assigned IP address is to use the IPSetup program (from Windows: Start → Programs → Netburner NNDK → IP Setup tool). In the screenshot below, the IP address field representing the static IP address is shown as 0.0.0.0, followed by the DHCP-assigned IP address (i.e. 10.1.1.101). Other parameters such as the network mask, gateway and DNS are also assigned and can be accessed as parameters in your application. The NDK Settings section (left pane of the IPSetup window), represents the static settings.

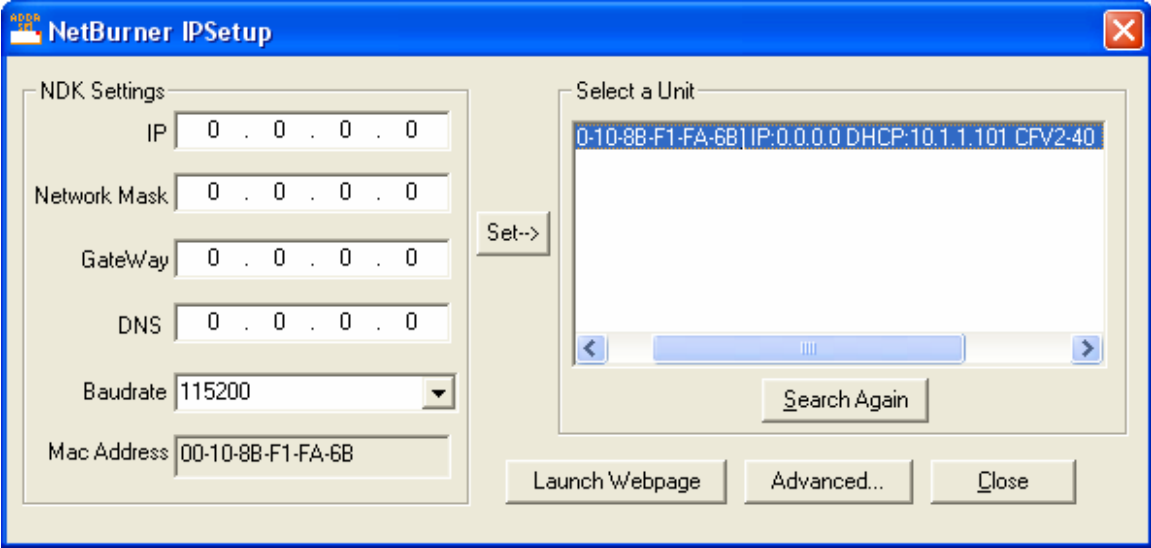

For additional information about IP Setup, please refer to your NNDK User Manual. From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.

## 7 Changing IP Addresses at Run-Time

System configuration parameters such as IP address, mask, gateway and DNS are stored in two places:

1. Configuration Records used by the system to store configuration parameters in flash memory.
2. Interface Blocks used by the system at run time.

There are 3 Configuration Records, numbered 0, 1 and 2, as defined in `\nburn\include\netinterface.h`:

```
#define CONFIG_IF_ID_ETHERNET (0)
#define CONFIG_IF_ID_WIFI (1)
#define CONFIG_IF_ID_ETHERNET2 (2)
```

The Configuration Record is a structure that contains all the system configuration parameters. When your NetBurner device boots, it copies these parameters to run-time variables that are used during normal system operation, called Interface Blocks. This application illustrates how to read and modify both runtime and stored flash configuration parameters.

NOTE: This application note was written for tools release 1.95. If you are using a later revision, please check the system file references to verify specific information on function calls and structures. This application note does not apply to prior releases.

### 7.1 THE CONFIGURATION RECORD

Configuration Records are stored in an 8k bytes sector of flash memory. There is one ConfigRecord structure for each network interface in your NetBurner device. In the 1.95 release, the each ConfigRecord occupies 256 bytes. To enable an application to modify and save the network settings you must retrieve the ConfigRecord for a specific interface, modify it, and save it to flash. The ConfigRecord structure is defined in `\nburn\include\system.h`:

```
typedef struct
{
    unsigned long recordsize;        /* The stored size of the struct */
    unsigned long ip_Addr;          /* The device IP Address */
    unsigned long ip_Mask;          /* The IP Address Mask */
    unsigned long ip_GateWay;       /* The address of the P gateway */
    unsigned long ip_TftpServer;    /* The address of the TFTP server to load
    data from */
    unsigned long baud_rate;        /* The initial system Baud rate */
    unsigned char wait_seconds;     /* The number of seconds to wait before
    booting */
    unsigned char bBoot_To_Application; /* True = app., False = monitor */
    unsigned char bException_Action; /* What should we do when we have an
    exception? */
    unsigned char m_FileName[80];   /* The file name of the TFTP file to load */
    unsigned char mac_address[6];   /* The Ethernet MAC address */
    unsigned char ser_boot;
    unsigned long ip_DNS_server;
    unsigned char core_mac_address[6]; /* The Base unit MAC address */
    unsigned char type_of_if;
    unsigned char direct_Tx;
    unsigned long m_ExtraData[4];
    unsigned char m_bUnused[3];
    unsigned char m_q_boot;         /* True to boot without messages */
    unsigned short Checksum;        /* A Checksum for this structure */
}__attribute__((packed)) ConfigRecord;
```



```
/* The read-only system config record */
extern const ConfigRecord gConfigRec;
```

## 7.2 Reading the Configuration Record

The functions to retrieve and save a ConfigRecord are:

```
ConfigRecord *GetIfConfig( int num );
void SaveIfConfig( ConfigRecord *cr, int num );
```

where num represents the interface number: 0, 1 or 2. The \*cr pointer would point to the new ConfigRecord you wish to save in flash memory.

Although the gConfigRec is available as the run-time copy for the first interface, it is recommended you use the GetIfconfig() function to get a fresh copy for the specific interface you want to modify.

### THE NETWORK INTERFACE BLOCK

While the ConfigRecord described in the previous section is used to store parameters in flash, the InterfaceBlock structure is used during system run-time to store the network configuration settings for each network interface. At boot time, the network settings from the ConfigRecord are read and copied to the InterfaceBlock.

As of tools revision 1.95, the values of the device IP address, mask, gateway, DNS, etc. are controlled by a structure located in \nburn\include\netinterface.h. The netinterface method was created to enable devices to have multiple network interfaces, such as multiple Ethernet ports and WiFi. The configuration information is kept in a linked list of structures with the following format:

```
struct InterfaceBlock
{
    MACADR theMac;
    IPADDR netIP;
    IPADDR netIpMask;
    IPADDR netIpGate;
    IPADDR netDNS;
    SendNetBuffer *send_func;
    KillInterface *kill_if;
    fEnableMulticast *enab_multicast;
    const char *InterfaceName;
    int config_num;
};
```

The functions to get an existing structure or save a modified structure are:

```
int GetFirstInterface();
int GetnextInterface( int last );
```

Functions to read InterfaceBlock parameters are:

```
IPADDR InterfaceIP( int InterfaceNumber );
IPADDR InterfaceDNS( int InterfaceNumber );
IPADDR InterfaceMASK( int InterfaceNumber );
IPADDR InterfaceGate( int InterfaceNumber );
MACADR InterfaceMAC( int InterfaceNumber );
```

Where InterfaceNumber is the interface number: 1, 2, 3, etc.

If all you wish to do is to change a network parameter at run-time, then you only need to change the InterfaceBlock value.

#### EXAMPLE: MODIFY AND CHANGE NETWORK SETTINGS

The following is an example program illustrating how modify and save a network setting:

1. Read ConfigRecord
2. Read InterfaceBlock
3. Modify InterfaceBlock to affect run-time values
4. Save ConfigRecord to store new parameters

### 7.3 Static and DHCP IP Address Modification Example

```

/*****
Example program to illustrate how an application can change the
run-time and stored Flash values for Ethernet IP, mask, Gateway
and DNS.

THIS EXAMPLE APPLIES TO TOOLS RELEASE 1.95 OR LATER

INTRODUCTION FOR CONFIGURATION RECORDS AND INTERFACE BLOCKS
- The NetBurner device contains runtime and stored (Flash) system
  configuration parameters. Interface Blocks are used at runtime,
  and Configuration Records are stored in Flash. At boot time,
  data from the Configuration Records are copied to Interface
  Blocks.

- There are 3 Configuration Records as defined in netinterface.h:
  #define CONFIG_IF_ID_ETHERNET (0)
  #define CONFIG_IF_ID_WIFI (1)
  #define CONFIG_IF_ID_ETHERNET2 (2)

  The order of these configuration records is fixed, regardless of
  the Interface Block number. For example, if you have only a WiFi
  interface, you still use Configuration Record 1.

- Configuration Records are numbered 0, 1 and 2. Interface Blocks
  are numbered 1, 2, 3. There is no correlation between this
  numbering. Interface Block 3 could reference Configuration Record
  1, depending on the order of interface registration calls by your
  application.

- This example will provide a menu through the serial debug port
  that enables you to set/clear static IP settings, and start/stop
  the DHCP Client service.

*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>

```

```

#include <autoupdate.h>
#include <dhcpclient.h>

// Make sure to include these header files
#include <bsp.h>
#include <string.h>
#include <utils.h>
#include <system.h>
#include <netinterface.h>

extern "C" {
    void UserMain(void * pd);
}

// Application name
const char * AppName = "Change IP Example";

// Variable to indicate if application tried to obtain runtime IP settings
// from a DHCP server.
bool AssignedDHCP = FALSE;

// Since we want to be able to start and stop DHCP, we need to create out
// own DHCP Object instead of using the GetDHCPAdderss() function which
// handles this automatically.
DhcpObject *pDhcpObj;

// Add a device name for DNS
const char *DeviceName = "NetBurner";
extern const char *pDHCPOfferName; // point this at above name in UserMain

/*-----
Display runtime IP values
This function demonstrates two methods to read the runtime IP
values:
1. Using the read-only Interface function calls
2. Using the GetInterfaceBlock() function to get a pointer to an
   Interface Record.
-----*/
void DisplayRuntimeIPSettings(int InterfaceNumber)
{
    fprintf("\r\n\r\n--- RUNTIME IP SETTINGS ---\r\n");
    if ( AssignedDHCP )
        fprintf("Values assigned by DHCP Server\r\n");

    // Display current runtime values using Interface read-only functions
    fprintf("IP runtime settings using Interface Functions for interface %d:\r\n",
            InterfaceNumber);
    fprintf("IP:   "); ShowIP(InterfaceIP(InterfaceNumber)); fprintf("\r\n");
    fprintf("Mask: "); ShowIP(InterfaceMASK(InterfaceNumber)); fprintf("\r\n");
    fprintf("Gate: "); ShowIP(InterfaceGate(InterfaceNumber)); fprintf("\r\n");
    fprintf("DNS:  "); ShowIP(InterfaceDNS(InterfaceNumber)); fprintf("\r\n");

    // Display current runtime values by getting a pointer to the Interface Block
    // and accessing it's variables.
    fprintf("\r\nIP runtime settings using GetInterfaceBlock() for interface %d:\r\n",
            InterfaceNumber);
    InterfaceBlock *ib = GetInterFaceBlock(InterfaceNumber);
    fprintf("IP:   "); ShowIP(ib->netIP); fprintf("\r\n");
    fprintf("Mask: "); ShowIP(ib->netIpMask); fprintf("\r\n");
}

```

```

    fprintf("Gate: "); ShowIP(ib->netIpGate); fprintf("\r\n");
    fprintf("DNS: "); ShowIP(ib->netDNS); fprintf("\r\n");
    fprintf("Interface Name: %s\r\n", ib->InterfaceName);
    fprintf("\r\n");
}

/*-----
Display Flash IP values
This function demonstrates two methods to read the IP settings
stored in the Flash Configuration Record:
1. Using the gConfigRec global read-only structure
2. Using the RawGetConfig() functoin to obtain a pointer to a
   specific Configuration Record.
-----*/
void DisplayFlashIPSettings(int RecordNumber)
{
    // Note that gConfigRec only applies to ConfigRecord 0
    fprintf("\r\n--- FLASH IP SETTINGS ---\r\n");
    fprintf("These values will be 0 if you are using DHCP\r\n");
    fprintf("IP Flash settings using gConfigRec for Record 0:\r\n");
    fprintf("IP: "); ShowIP(gConfigRec.ip_Addr); fprintf("\r\n");
    fprintf("Mask: "); ShowIP(gConfigRec.ip_Mask); fprintf("\r\n");
    fprintf("Gate: "); ShowIP(gConfigRec.ip_GateWay); fprintf("\r\n");
    fprintf("DNS: "); ShowIP(gConfigRec.ip_DNS_server); fprintf("\r\n");

    // Note that ConfigRecord structures start at 0 for the first interface
    ConfigRecord *cr = RawGetConfig(RecordNumber);
    fprintf("\r\nIP Flash settings using RawGetConfig() for Record %d:\r\n",
        RecordNumber);
    fprintf("IP: "); ShowIP(cr->ip_Addr); fprintf("\r\n");
    fprintf("Mask: "); ShowIP(cr->ip_Mask); fprintf("\r\n");
    fprintf("Gate: "); ShowIP(cr->ip_GateWay); fprintf("\r\n");
    fprintf("DNS: "); ShowIP(cr->ip_DNS_server); fprintf("\r\n");
}

/*-----
Change the runtime IP settings.
This function will display the current IP address and mask,
change the runtime variables to new values, then display the
new values.
-----*/
void ChangeRuntimeIPSettings(int InterfaceNumber, IPADDR IpAddr, IPADDR IpMask, IPADDR
IpGate, IPADDR IpDNS)
{
    fprintf("\r\nChanging IP runtime settings for interface %d:\r\n",
        InterfaceNumber);

    // Display current values
    InterfaceBlock *ib = GetInterFaceBlock(InterfaceNumber);
    fprintf("Old Settings:\r\n");
    fprintf(" IP: "); ShowIP(ib->netIP); fprintf("\r\n");
    fprintf(" Mask: "); ShowIP(ib->netIpMask); fprintf("\r\n");
    fprintf(" Gway: "); ShowIP(ib->netIpGate); fprintf("\r\n");
    fprintf(" DNS: "); ShowIP(ib->netDNS); fprintf("\r\n");
    fprintf(" Interface Name: %s\r\n", ib->InterfaceName);

    // Change to new values
    ib->netIP = IpAddr;
    ib->netIpMask = IpMask;
    ib->netIpGate = IpGate;
}

```

```

ib->netDNS = IpDNS;

// Display new values. At this point, you can communicate with the
// device using the new ip address and mask.
iprintf("New Settings:\r\n");
iprintf("  IP:  "); ShowIP(ib->netIP); iprintf("\r\n");
iprintf("  Mask: "); ShowIP(ib->netIpMask); iprintf("\r\n");
iprintf("  Gway: "); ShowIP(ib->netIpGate); iprintf("\r\n");
iprintf("  DNS:  "); ShowIP(ib->netDNS); iprintf("\r\n");
iprintf("  Interface Name: %s\r\n", ib->InterfaceName);
}

/*-----
Store new IP address and mask settings to the configuration record
in Flash. In most cases you would have already changed the runtime
values to the same settings.
-----*/
void ChangeFlashIPSettings(int RecordNumber, IPADDR IpAddr, IPADDR IpMask, IPADDR
IpGate, IPADDR IpDNS)
{
    iprintf("\r\nChanging Flash settings using RawGetConfig() for Record %d:\r\n",
        RecordNumber);

    // Get pointer to Configuration Record
    ConfigRecord *cr = RawGetConfig(RecordNumber);

    // Display current Flash values
    iprintf("Old Settings:\r\n");
    iprintf("  IP:  "); ShowIP(cr->ip_Addr); iprintf("\r\n");
    iprintf("  Mask: "); ShowIP(cr->ip_Mask); iprintf("\r\n");
    iprintf("  Gate: "); ShowIP(cr->ip_GateWay); iprintf("\r\n");
    iprintf("  DNS : "); ShowIP(cr->ip_DNS_server); iprintf("\r\n");

    // create new config record and copy data
    ConfigRecord NewRec;
    memcpy( &NewRec, cr, sizeof( NewRec ) );

    // Change parameters
    NewRec.ip_Addr = IpAddr;
    NewRec.ip_Mask = IpMask;
    NewRec.ip_GateWay = IpGate;
    NewRec.ip_DNS_server = IpDNS;

    // Write new values to Flash system configuration sector
    UpdateConfigRecord_Num(&NewRec, RecordNumber);

    // Display current Flash values
    iprintf("New Settings:\r\n");
    iprintf("  IP:  "); ShowIP(cr->ip_Addr); iprintf("\r\n");
    iprintf("  Mask: "); ShowIP(cr->ip_Mask); iprintf("\r\n");
    iprintf("  Gate: "); ShowIP(cr->ip_GateWay); iprintf("\r\n");
    iprintf("  DNS : "); ShowIP(cr->ip_DNS_server); iprintf("\r\n");

    // You do not need to reboot if you change both the runtime
    // and flash values. This function call requires #include <bsp.h>
    // ForceReboot();
}

/*-----
DisplayUserMenu
Displays menu through the serial port to interact with program.
-----*/

```

```

-----*/
void DisplayUserMenu()
{
    iprintf("\r\n--- Main Menu ---\r\n");
    iprintf("1. Display Runtime Settings\r\n");
    iprintf("2. Display Flash Settings\r\n");
    iprintf("3. Change Runtime Static Settings\r\n");
    iprintf("4. Change Flash Static Settings\r\n");
    iprintf("5. Change Flash & Runtime Static Settings to 0.0.0.0\r\n");
    iprintf("6. Start DHCP Client Service\r\n");
    iprintf("   and attempt to get a DHCP address\r\n");
    iprintf("7. Stop DHCP Client Service\r\n");
}

/*-----
MyStartDHCP
Most applications can just use the GetDHCPAddress() function at boot
time to enable the DHCP Client. If you require more control over the
DHCP service, such as starting and stopping, then a few lines of
code are required to create a DhcpObject and check a semaphore to
determine if the DHCP request was successful. This is essentially
what the GetDHCPAddress() function does.
-----*/
void MyStartDHCP( InterfaceBlock *ib )
{
    int FirstInterface = GetFirstInterface(); // Get first interface identifier

    // The following lines of code are essentially what the GetDHCPAddress() function
    // does to make the DHCP process easier.
    pDhcpObj = new DhcpObject( FirstInterface );
    pDhcpObj->StartDHCP(); // Start DHCP

    // Pend on semaphore to verify an address was obtained
    if ( OSSemPend( &( pDhcpObj->NotifySem ), 10 * TICKS_PER_SECOND ) == OS_TIMEOUT )
//Wait 10 seconds
    {
        iprintf("\r\n\r\n*** WARNING ***\r\n");
        iprintf("IP Address was set to 0.0.0.0, and a DHCP server could not be
found.\r\n");
        iprintf("Device does not have a valid IP address.\r\n\r\n");
    }
    else
    {
        iprintf("DHCP assigned the following values:\r\n");
        iprintf("IP: "); ShowIP(ib->netIP); iprintf("\r\n");
        iprintf("Mask: "); ShowIP(ib->netIpMask); iprintf("\r\n");
        iprintf("Gate: "); ShowIP(ib->netIpGate); iprintf("\r\n");
        iprintf("DNS: "); ShowIP(ib->netDNS); iprintf("\r\n");
        iprintf("Interface Name: %s\r\n", ib->InterfaceName);
        iprintf("\r\n");
        AssignedDHCP = TRUE;
    }
}

/*-----
UserMain task
-----*/
void UserMain(void * pd)
{
    InitializeStack();
    pDHCPOfferName = DeviceName; // Host name for DNS
}

```

```

int FirstInterface = GetFirstInterface(); // Get first interface identifier
InterfaceBlock *ib = GetInterFaceBlock(FirstInterface); // Get interface data

if (ib->netIP == 0) // Check IP address for 0.0.0.0, and use DHCP if necessary
{
    iprintf("\r\nNo static IP address set, attempting DHCP\r\n");
    MyStartDHCP( ib );
}

OSChangePrio(MAIN_PRIO);
EnableAutoUpdate();
StartHTTP();

DisplayUserMenu();
while (1)
{
    char c = getchar();
    switch (c)
    {
        case '1': // Display runtime IP values
            DisplayRuntimeIPSettings(FirstInterface);
            break;

        case '2': // Display Flash IP values
            // This example uses only 1 Configuration Record, 0
            DisplayFlashIPSettings(0);
            break;

        case '3': // Change the runtime IP address and mask
            // After this function, the device will respond to the new IP settings
            ChangeRuntimeIPSettings(FirstInterface, // Interface Block
                                   AsciiToIp("10.1.1.24"), // New IP address
                                   AsciiToIp("255.255.255.0"), // New IP mask
                                   AsciiToIp("10.1.1.1"), // New IP gateway
                                   AsciiToIp("10.1.1.2")); // New IP dns

            break;

        case '4': // Change the Flash IP address and mask
            // If the device reboots, the new values will be in effect
            ChangeFlashIPSettings(0, // Use first Config Record, 0
                                  AsciiToIp("10.1.1.24"), // New IP address
                                  AsciiToIp("255.255.255.0"), // New IP mask
                                  AsciiToIp("10.1.1.1"), // New IP gateway
                                  AsciiToIp("10.1.1.2")); // New IP dns

            break;

        case '5': // Set all flash values to 0.0.0.0
            ChangeFlashIPSettings(0, // Use first Config Record, 0
                                  AsciiToIp("0.0.0.0"), // New IP address
                                  AsciiToIp("0.0.0.0"), // New IP mask
                                  AsciiToIp("0.0.0.0"), // New IP gateway
                                  AsciiToIp("0.0.0.0")); // New IP dns

            ChangeRuntimeIPSettings(FirstInterface, // Interface Block
                                   AsciiToIp("0.0.0.0"), // New IP address
                                   AsciiToIp("0.0.0.0"), // New IP mask
                                   AsciiToIp("0.0.0.0"), // New IP gateway
                                   AsciiToIp("0.0.0.0")); // New IP dns

            break;

        case '6': // Start DHCP Client service
            if ( !AssignedDHCP )

```

```

    {
        iprintf("Contacting DHCP Server ...\r\n");
        MyStartDHCP( ib );
    }
    else
    {
        iprintf("\r\n*** Error: DHCP Client service is already running\r\n");
    }
    break;

case '7': // Stop DHCP Client service
    if ( AssignedDHCP )
    {
        pDhcpObj->StopDHCP(); // Stop DHCP
        AssignedDHCP = FALSE; // Flag for this application
        iprintf("\r\nDHCP Release sent and DHCP Client service has been
stopped\r\n");
        DisplayRuntimeIPSettings(FirstInterface);
    }
    else
    {
        iprintf("\r\n*** Error: DHCP Client service is not running\r\n");
    }
    break;

default: DisplayUserMenu();
}
}
}

```



## 8 Basic Web Server Functions

### 8.1 Introduction

The Template program is now at the point where it will boot up, display its IP address (static or acquired by DHCP), and loop forever printing messages to stdout (the debug serial port). In this chapter, we will use the web server to display some very simple static content. The NetBurner Web Server excels at providing dynamic content as well, which will be discussed in the next chapter.

A web server is a specialized case of a generic TCP server that listens on the “well known port number” 80. The web server operates as a task that waits for incoming TCP connections on port 80, then delivers the requested content to the client - which is usually a web browser.

To initiate the transfer, the web browser sends a GET request. If no file name is specified in the GET request, a default file named `index.htm` or `index.html` is returned. The NetBurner Web Server assumes a default of `index.htm` (you can change this to `html` if you desire). Once the web server sends the requested data, it terminates the TCP connection.

To enable the web server and serve up pages to a web browser an application needs the following:

1. Add the `StartHTTP()` function call to start the Web Server
2. A directory named “html” in the project directory
3. Create a web page called `index.htm`.

All of the above steps are done automatically by the AppWizard if you select the appropriate checkbox items. Since we did this with the initial template program, all we need to do now is edit the HTML content in the `index.htm` file.

#### Creating a Blank Project for Existing Code

If you have an existing project with `c`, `c++` and web content, you can create a “blank project” instead of using the AppWizard. Once you have a blank project the IDE will be able to scan your `html` directory and automatically add the `html` content to the project. Please see the IDE instructions on creating a blank project for more details.

### 8.2 Edit the `index.htm` Web Page

Next we will edit the `index.htm` file created by the AppWizard. The page will contain some text and an image.

#### Using HTML Tools

You can use HTML tools such as Dreamweaver to create your web content. However, remember that EVERYTHING in the `html` directory is included in the application image. Some HTML tools can leave large project files in the `html` directory that will take up a large portion of your application space. You should remove any such files before building your project.


Edit the index.htm file as shown below:

```
<HTML>
<BODY>
<IMG SRC="Logo.jpg" BORDER="0">
<IMG SRC="SB72IO.jpg" BORDER="0">
<H1>Thank you for NetBurning!</H1><BR>
</BODY>
</HTML>
```

The <HTML> and <BODY> tags define the file as containing HTML content and provide delimiters for the body of the web page. The <IMG> tags are used to display the logo and board pictures. The text message “Thank you for NetBurning” is then displayed. The <H1> tags specify that the text be displayed as a header in larger bold font.

Note: The images are available with the project files as a download from [www.netburner.com](http://www.netburner.com). If you do not have these files, you can simply delete the two lines with the <IMG> tags and display only the text.


Now compile and download the application. When you view the web page the output should look like the screen shot below:

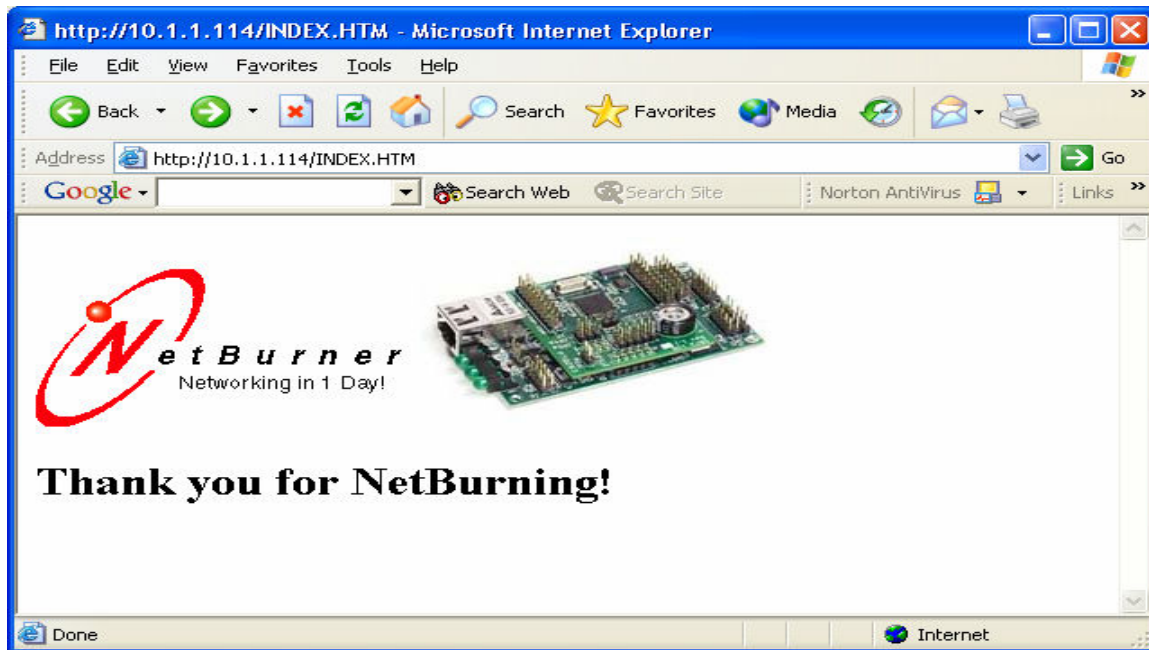

## 9 Interactive Web Form Example

### 9.1 Introduction

In the previous chapter, our basic web page example demonstrated static web content. Your NetBurner platform can easily do dynamic content as well. In this example we will create a configuration web page interface that will provide submission and recall of changeable data by using HTML forms. Below is a screen shot of this application:

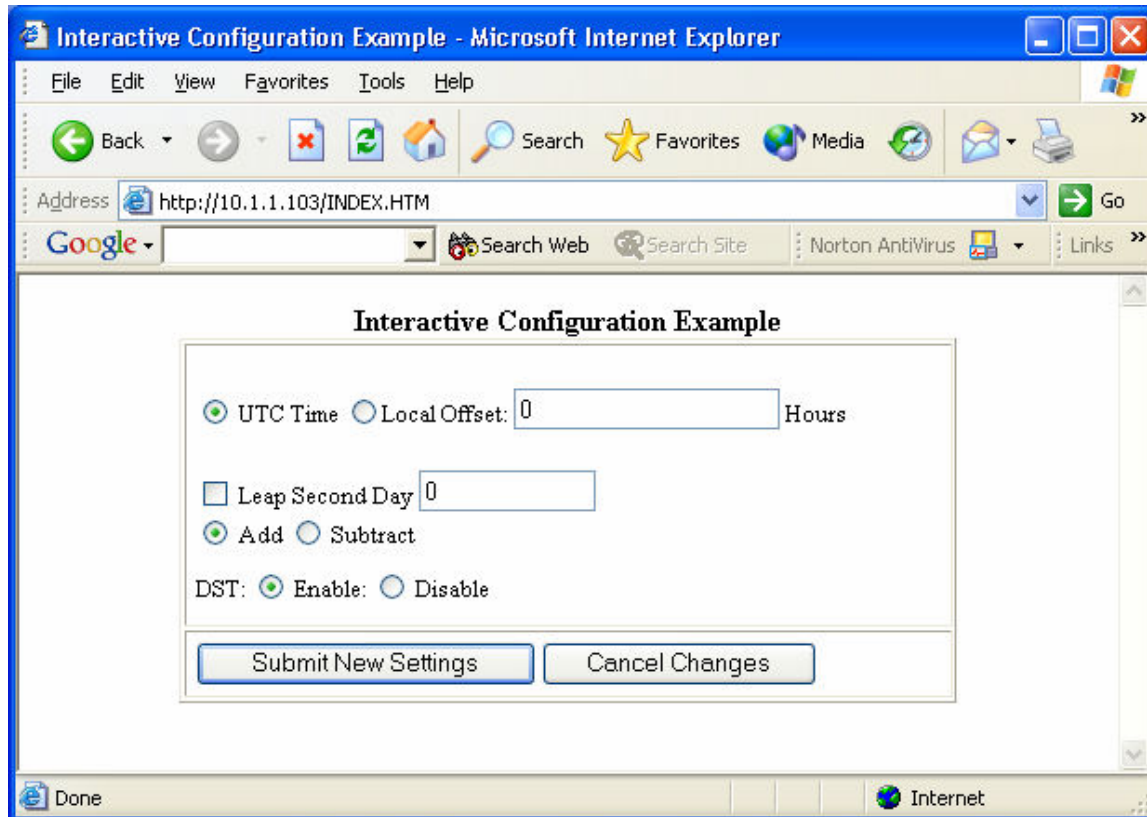

### 9.2 How HTML Forms Work

You have probably encountered forms many times on the web, especially for ecommerce and feedback forms. The format is typically some number of text fields, checkboxes, radio buttons, combo boxes and a *submit* button. When you click on the *submit* button, the data from the form is sent to the web server as a HTTP POST. The web server then parses the data and takes appropriate action. If you have ever purchased anything on the web, filled out the order information, and clicked on a button like “confirm order” or “buy”, you most likely submitted form information and were then redirected to a page confirming the order.

A form is defined in HTML by the `<FORM></FORM>` tags. User input is accomplished using the `<INPUT>` tag, representing text fields, checkboxes, radio buttons, etc.. For example,

```
<FORM ACTION="name.htm" METHOD="POST">
<INPUT TYPE="radio" VALUE="UTC" NAME="RadioGroup1" CHECKED="1"> UTC Time
<INPUT TYPE="radio" VALUE="Local" NAME="RadioGroup1">Local Offset:
```

```
<INPUT NAME="tfHours" VALUE="9" TYPE="text" SIZE="20"> Hours
<INPUT TYPE="submit" VALUE="Submit">
</FORM>
```

The above HTML source code shows the first few form items of the example explained in this chapter. The above form has two mutually exclusive radio buttons, one text field and the form submit button. The web browser will identify the input types and create the respective graphics on the web page. **Note:** The items in bold text will be created dynamically by the application source code in our example program. The user will select a radio button, enter text in the text field, and finally click on the submit button. The user form values will then be sent to the web server as a POST.

### 9.3 Collecting User Input: Web Forms vs. URL's

There are two common methods for moving data from the client web browser to the web server on an embedded platform: HTML Forms using POST, and storing the data in the URL. The previous section described form operation. You have probably seen the URL method many times in e-commerce applications.

For example, the URL - <http://www.store.com/orderform?type=order123> is storing the data `type=order123` in the URL. Basically, everything following the '?' character is ignored by the browser, so your application can store whatever data it needs after the character. A big advantage of this method is that the application is stateful, meaning multiple users can access the same application and each user's session maintains its specific data in the URL.

### 9.4 Application Objectives

We will create a web page interface using forms that can:

- Modify and recall text fields, checkboxes and radio buttons
- Store and recall settings in flash memory using the Get/Set API function calls
- Use the Submit web page feature to modify settings
- Parse web form data submissions
- Use the FUNCTIONCALL HTML tag to link HTML I/O to C/C++ code

### 9.5 Application Files

Our application is divided up into the following files:

File Name	Description
main.cpp	This is the same as in the basic web example with one modification: the IP Address only prints to the debug port one time.
iadweb.cpp	Source code module for the interactive web functions.
iadweb.h	Header file for iadweb.cpp
html\index.htm	HTML source file.

### 9.6 Interactive Web Functions

The source code file `iadweb.cpp` handles the web functions and interface for the application. It has the following functions:

- Definition and initialization of non-volatile flash storage
- Handles FUNCTIONCALL tags from the web page (`index.htm`)
- Handles web page POSTs, and extracts form data

The source code for `iadweb.cpp` is shown below:

```

1  #include "predef.h"
2  #include <stdio.h>
3  #include <stdlib.h>
4  #include <startnet.h>
5  #include <iosys.h>
6  #include <utils.h>
7  #include <ip.h>
8  #include <tcp.h>
9  #include <htmlfiles.h>
10 #include <http.h>
11 #include <string.h>
12 #include <basictypes.h>
13 #include "iadweb.h"
14
15
16 #define VERIFY_KEY (0x10220002) // NV Settings key code
17
18
19 typedef struct NV_SettingsStruct // non-volatile storage structure
20 {
21     DWORD VerifyKey;
22     BOOL bUTC;
23     int nLocalOffset;
24     BOOL bCkboxLeapSecDay;
25     int nLeapSecDay;
26     BOOL bLeapSecDayAdd;
27     BOOL bEnabledDST;
28 };
29
30
31 //----- global vars -----
32 char gPostBuf[1000];
33 NV_SettingsStruct NV_Settings;
34 const char FirmwareVersion[] = "1.0, 12/17/2002";
35
36
37
38 /*-----*
39 Check NV Settings
40 Assign default values if VerifyKey is not valid, otherwise load
41 stored flash values.
42 -----*/
43 void CheckNVSettings()
44 {
45     NV_SettingsStruct *pData = (NV_SettingsStruct *)GetUserParameters();
46     NV_Settings.VerifyKey = pData->VerifyKey;
47     NV_Settings.bUTC = pData->bUTC;
48     NV_Settings.nLocalOffset = pData->nLocalOffset;
49     NV_Settings.bCkboxLeapSecDay = pData->bCkboxLeapSecDay;
50     NV_Settings.nLeapSecDay = pData->nLeapSecDay;

```

```

51     NV_Settings.bLeapSecDayAdd = pData->bLeapSecDayAdd;
52     NV_Settings.bEnableDST     = pData->bEnabledDST;
53
54     if (NV_Settings.VerifyKey != VERIFY_KEY)
55     {
56         fprintf("Reset NV Memory Defaults\n");
57
58         NV_Settings.VerifyKey     = VERIFY_KEY;
59         NV_Settings.bUTC          = TRUE;
60         NV_Settings.nLocalOffset = 0;
61         NV_Settings.bCkboxLeapSecDay = FALSE;
62         NV_Settings.nLeapSecDay   = 0;
63         NV_Settings.bLeapSecDayAdd = TRUE;
64         NV_Settings.bEnableDST    = TRUE;
65
66         SaveUserParameters(&NV_Settings, sizeof(NV_Settings));
67     }
68 }
69
70
71
72 /*-----*/
73 -----*/
74 void WebUTC(int sock, PCSTR url)
75 {
76     fprintf("Entered WebUTC\r\n");
77     if (NV_Settings.bUTC)
78         writestring(sock, "CHECKED=\"1\" ");
79 }
80
81 /*-----*/
82 -----*/
83 void WebLocal(int sock, PCSTR url)
84 {
85     if (! NV_Settings.bUTC)
86         writestring(sock, "CHECKED=\"1\" ");
87 }
88
89
90 /*-----*/
91 -----*/
92 void WebLocalOffset(int sock, PCSTR url)
93 {
94     char buf[80];
95
96     sprintf(buf, "VALUE=\"%d\" ", NV_Settings.nLocalOffset);
97     writestring(sock, buf);
98 }
99
100
101
102 /*-----*/
103 -----*/
104 void WebLeapCkbox(int sock, PCSTR url)
105 {
106     if (NV_Settings.bCkboxLeapSecDay)
107         writestring(sock, "checked");
108 }
109
110 /*-----*/
111 -----*/
112 void WebLeapSecDay(int sock, PCSTR url)
113 {

```

```

114     char buf[80];
115
116     sprintf(buf, "VALUE=\"%d\" ", NV_Settings.nLeapSecDay);
117     writestring(sock, buf);
118 }
119
120 /*-----
121 -----*/
122 void WebLeapSecDayAdd(int sock, PCSTR url)
123 {
124     if (NV_Settings.bLeapSecDayAdd)
125         writestring(sock, "CHECKED=\"1\" ");
126 }
127
128 /*-----
129 -----*/
130 void WebLeapSecDaySub(int sock, PCSTR url)
131 {
132     if (! NV_Settings.bLeapSecDayAdd)
133         writestring(sock, "CHECKED=\"1\" ");
134 }
135
136 /*-----
137 -----*/
138 void WebEnabledDST(int sock, PCSTR url)
139 {
140     if (NV_Settings.bEnabledDST)
141         writestring(sock, "CHECKED=\"1\" ");
142 }
143
144 /*-----
145 -----*/
146 void WebDisabledDST(int sock, PCSTR url)
147 {
148     if (! NV_Settings.bEnabledDST)
149         writestring(sock, "CHECKED=\"1\" ");
150 }
151
152
153 /*-----
154 Handle HTTP Post
155
156 WARNING WARNING WARNING      CAUTION CAUTION CAUTION
157 The User data space is 8K in size. The object we are storing is
158 less than 200 bytes long, thus it is probably ok to make an automatic
159 variable out of it. It would NOT BE OK to make an 8K automatic
160 variable. The choices for doing this with an 8K object...
161
162 First choice: make a global variable, this way the linker will
163 allocate space for it. All errors will be at link time not run time.
164
165 Second choice: Increase the HTTP stack size in constants.h and
166 recompile the whole system directory.
167
168 Third choice: use malloc and free. The only problem is what do
169 you do if malloc fails?
170 -----*/
171 int MyDoPost(int sock, char * url, char * pData, char * rxBuffer)
172 {
173     int max_chars = 40;
174     char *buf = gPostBuf; // post buffer is global
175
176     iprintf(pData); // print all data sent from app

```

```

177
178
179 // Process UTC/Local radio buttons
180 if (ExtractPostData("radioUTC-Local", pData, buf, max_chars) == -1)
181     fprintf("Error reading post data: radioUTC\r\n");
182 else
183 {
184     if (strcmp(buf, "UTC") == 0)
185         NV_Settings.bUTC = TRUE;
186     else
187         NV_Settings.bUTC = FALSE;
188 }
189
190 // Process Local Offset Hours text field
191 if (ExtractPostData("tfLocalOffHours", pData, buf, max_chars) == -1)
192     fprintf( "Error reading post data: tfLocalOffHours\r\n");
193 else
194     NV_Settings.nLocalOffset = atoi(buf);
195
196 // Process Leap Second Day checkbox
197 if (ExtractPostData("ckboxLeapSecDay", pData, buf, max_chars) == -1)
198     NV_Settings.bCkboxLeapSecDay = FALSE;
199 else
200     NV_Settings.bCkboxLeapSecDay = TRUE;
201
202 // Process Leap Second Day text field
203 if (ExtractPostData("tfLeapSecDay", pData, buf, max_chars) == -1)
204     fprintf( "Error reading post data: tfLeapSecDay\r\n");
205 else
206     NV_Settings.nLeapSecDay = atoi(buf);
207
208 // Process Leap Sec Day Add/Sub radio buttons
209 if (ExtractPostData("radioLeapAddSub", pData, buf, max_chars) == -1)
210     fprintf("Error reading post data: radioLeapAddSub\r\n");
211 else
212 {
213     if (strcmp(buf, "Add") == 0)
214         NV_Settings.bLeapSecDayAdd = TRUE;
215     else
216         NV_Settings.bLeapSecDayAdd = FALSE;
217 }
218
219 // Process DST radio buttons
220 if (ExtractPostData("radioDST", pData, buf, max_chars) == -1)
221     fprintf("Error reading post data: radioDST\r\n");
222 else
223 {
224     if (strcmp(buf, "Enable") == 0)
225         NV_Settings.bEnableDST = TRUE;
226     else
227         NV_Settings.bEnableDST = FALSE;
228 }
229
230
231 // Now to store it in flash.
232 // WARNING: If new settings are added, remember to add them to
233 //          NV Settings default initialization!
234 NV_Settings.VerifyKey = VERIFY_KEY;
235 if ( SaveUserParameters(&NV_Settings, sizeof(NV_Settings)) != 0 )
236     fprintf( "New Settings Saved\r\n");
237 else
238     fprintf( "ERROR: Could not save new settings\r\n");
239

```



```

240
241     // We have to respond to the post with a new HTML page. In
242     // this case we will redirect so the browser will go to
243     // that URL for the response.
244     RedirectResponse(sock, "index.htm");
245
246     return 0;
247 }
248
249
250 /*-----
251 Register Post
252 This function sets the HTTP POST handler to point to our
253 function.
254 -----*/
255 void RegisterPost()
256 {
257     SetNewPostHandler(MyDoPost);
258 }

```

Line 16: VERIFY\_KEY is used to determine if the flash memory space contains valid data. If the key is not found, then the flash memory is initialized with default values. This is useful to handle two conditions: when the hardware is used for the first time, and when a software modification changes the non-volatile data structure (the key would be incremented to a new value to force initialization again).

Lines 19-28: This is the non-volatile memory structure. The user parameter flash storage area is an 8k flash sector (8k by default, but can be expanded). Applications store and recall data to this sector by writing the entire structure with the API calls SaveUserParameters( ) and GetUserParameters( ).

Lines 72 – 150: Each FUNCTIONCALL tag in the index.htm file has a corresponding function defined in the format: void foo(int sock, PCSTR url), where foo is the name of the function, sock is a handle to the network socket connection, and url is the actual URL that was sent to the web server from the web browser. Some or all of these parameters will be used depending on your application. If the function needs to write data to the web client, then the write( ) function can be used with the sock parameter. This can be useful for filling in data fields or generating graphs.

The important thing to remember is that the client web browser will not see the FUNCTIONCALL tag. As far as the browser is concerned, all the data is just an input stream from a TCP connection. To verify this, you can view the HTML source in your web browser. All the FUNCTIONCALL tags should be replaced with HTML data. In this example application, most of the functions fill in a piece of a HTML tag to show text field data or remember which radio button was selected in a group.

Your application does not need to explicitly call any of these functions. As the web sever is delivering the web content to the web browser, it will automatically call each function with a FUNCTIONCALL tag.

Line 171: The MyDoPost( ) function will be called whenever a HTML form is submitted, which occurs when a user selects the “submit” button in a HTML form. The web server has a standard function to handle POSTs; the function RegisterPost( ) is used to intercept a POST and send it to MyDoPost( ). The return value of MyDoPost( ) is not currently used, but currently should return a value of 0 to be compatible with possible future expansin.

The parameters passed in `MyDoPost()` are:

Parameter Type	Description
sock	The file descriptor for the socket that this function should send a response to.
url	A string containing the URL of the POST destination. This field is used to determine which form the POST came from.
pData	A pointer to a string containing the form data (i.e. text fields, radio button and check box selections, etc)
rxbuffer	A pointer to the entire HTTP request. This is not normally needed.

Data is extracted from the form using the function:

```
int ExtractPostData(PCSTR name, PCSTR data, PSTR dest_buffer, int maxlen)
```

This function takes the HTML post data sent to the POST function, extracts the data associated with a specific *name* and returns it in *dest\_buffer*. For example,

```
ExtractPostData("radioUTC-Local", pData, buf, max_chars)
```

looks for the name *radioUTC-Local* in the string *pData* and returns the data portion in *buf*. The *max\_chars* parameter specifies the maximum length of characters to store in *buf* to avoid an overflow.

Once the data is stored in *buf*, the example application stores the value in an array and the array is written to the user flash storage area with the function:

```
SaveUserParameters(&NV_Settings, sizeof(NV_Settings))
```

`SaveUserParameters()` is an API function that will take a pointer to the data to be stored, in this case the address of *NV\_Settings*, and a second parameter representing the size of the data. This is easily done by using a structure and the *sizeof()* function.

## 10 TCP vs UDP

A very common question that arises when designing an network application is whether to use TCP (Transmission Control Protocol) or UDP (User Datagram Protocol). There are a few guidelines and features that can determine which would be the preferred protocol. Some of the issues discussed may not mean much before you read the TCP and UDP sections later in this guide, but discussing these issues now may make you aware of certain issues as you read those sections.


In general, TCP is a *connection oriented byte stream* used for point-to-point communications where reliability and sequencing of data is required. TCP handles retransmission of data, acknowledgements, error detection and will guarantee the data received will be sequenced in the same order as it was sent.

UDP can be thought of as a scaled down protocol as compared with TCP. It is a *connectionless* protocol that does not guarantee delivery and does not sequence the segments (although each segment is numbered). UDP is a “send and forget” protocol that does not use acknowledgements. A common comparison is that TCP is similar to a phone call and UDP is similar to a post card (although the time difference between a phone call and the mail must be ignored). With TCP, you connect to a specific destination phone number. When that person answers they say “hello”, you say “Hi, my name is Bob”, and then the conversation continues with each side speaking and responding (in a well-behaved conversation!). With UDP you essentially transmit a datagram, like writing on a post card, and send it without verifying it was received or undamaged along the way.

When choosing between TCP and UDP, some major concerns are the overhead it takes to establish a TCP connection, speed and the reliability of data transmission. For example, SNMP uses UDP. SNMP is used to monitor a network and sends a lot of messages for status updates and alerts. If TCP were used, the overhead of establishing, maintaining and closing a connection for each message would bog down the network leaving little room for other traffic. A second example of when UDP is a better choice is when an application handles it’s own reliability at the application layer. Using TCP in this instance would be redundant. The NetBurner UDP Class implementation also has a speed advantage over TCP. Data stored in a UDP packet is dispatched by providing the stack functions with a pointer to the data – it does not copy the data to separate buffer locations. This factor alone should provide a 30% speed increase over TCP, which must be buffered.

In addition, TCP is a stream based protocol and UDP is a datagram based protocol. Let’s take an example of an application in which a NetBurner device takes A/D readings and sends them to another network device or host PC. Using UDP, each output operation (i.e. creating and sending a UDP packet) results in exactly one IP packet being created and sent. The result of taking and sending 10 A/D readings is that the host will receive 10 individual packets, each containing one reading. The host PC can then easily identify each reading, although each reading will have to be sent with a sequence number so that the reading order can be recreated. If TCP is used with a single continuous network connection (i.e. the connection is not closed and reestablished for each reading), you do not have control over how many readings are sent with each IP packet. You would need to add start message and stop message identifiers to separate the data from each reading.

An example of sending data of different sizes using TCP vs UDP is illustrated below:

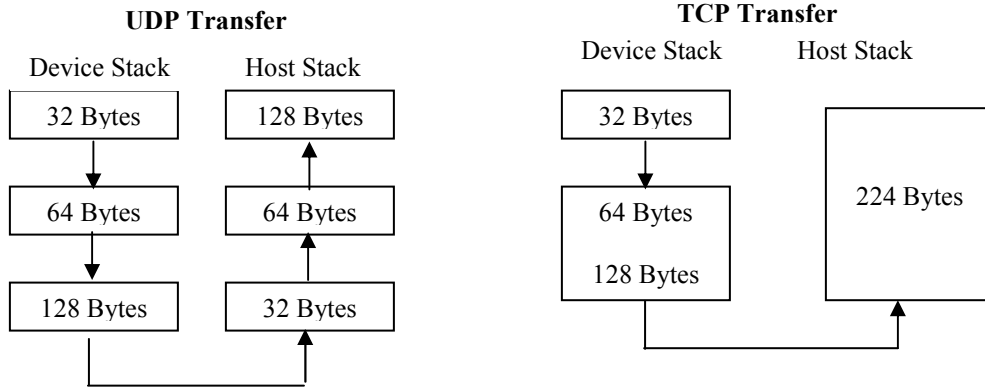

Applications that use TCP are: HTTP, FTP, Telnet and SMTP. Applications that use UDP are: DHCP, BOOTP, SNMP and DNS.

## 11 TCP - Transmission Control Protocol

TCP is used to create a reliable byte stream connection between two devices. Usually one device is called a *server* and the other a *client*. The first sentence contains important descriptive words that you need to consider when choosing between TCP and UDP:

Connection-oriented: The devices must establish a connection before they can exchange data

Reliable: TCP uses acknowledgements, retransmissions, checksums and flow control

Stream based: Although TCP and UDP both use IP, TCP sends information as a byte stream. There are no record markers to delimit the data. For example, if a server device is sending analog-to-digital (A/D) readings to a client device, the client will see a stream of digits; TCP will not automatically insert delimiters to allow the client to determine where one measurement ends and the next begins. To the client, the stream may look like: "98273129323424". Even if the client knew each reading was 4 digits, it would not know where one ended and the next began.

In contrast to TCP, UDP (covered in the next chapter) is an unreliable, datagram-oriented connectionless protocol. Delivery is not guaranteed, but each output operation creates and sends one UDP datagram. In the above A/D example, each reading (or some number of multiple readings) could be sent as a single datagram and the client could then process one datagram at a time.

### Network Bandwidth and Packet Size

Network bandwidth and packet size are significant considerations when writing an application. In practice, an application such as the A/D example would probably create packets with a "number of reading" field, or send a fixed multiple number of readings in each packet.

### 11.1 TCP Server Introduction

A TCP server is basically an application that creates a listening socket, and then listens on the socket for incoming connections. When an incoming connection is detected, the connection is then accepted. A web server is an example of a familiar TCP server. A web server listens on "well-known" port number 80 for incoming connections. Once a connection is established, the web browser will send a GET request to the web server, which will then send the requested information and terminate the connection. A web server is just a specific case of a TCP server.

To connect to a TCP server you must specify a *port number*. A port number is a 16-bit value. Since you must know the port number before connecting, many port numbers have been defined for common protocols, and are called well-known port numbers. Some of these values are shown below:


FTP	21
Telnet	23
SMTP	25
DNS	53
TFTP	69
HTTP	80
POP3	110
NTP	123

An important thing to remember is that it takes 4 parameters to define any TCP connection: Source IP address, Source port number, Destination IP address and Destination port number.

## 1 Writing a NetBurner TCP Server

Writing a TCP server on the NetBurner platform is very straightforward:

1. Create a listening socket with the `listen()` function
2. Wait for an incoming connection with the blocking call `accept()`

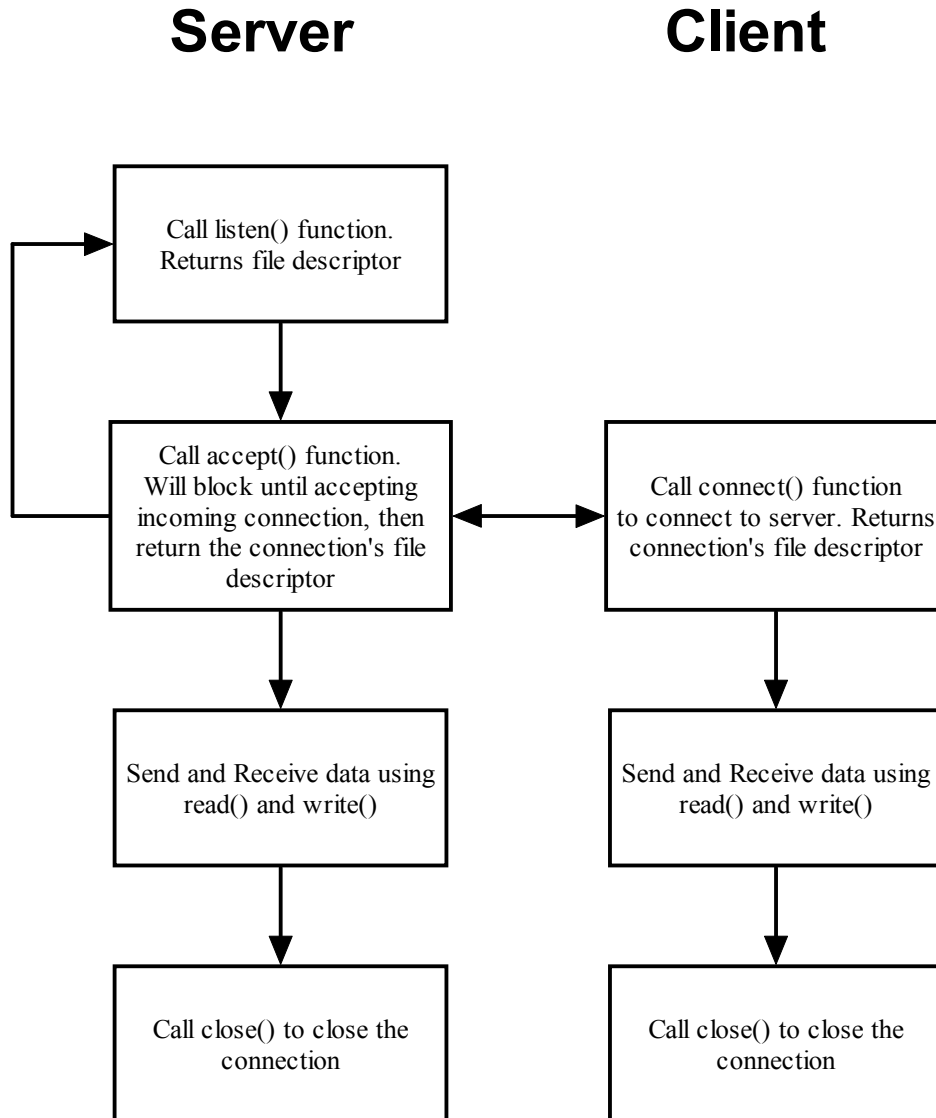

### 11.1.1 NetBurner TCP Server Application Source Code

This example program will listen on port 23 for incoming connections, send a sign on message to the client when a connection is made, and display all received data to the debug serial port. A telnet program on a host PC will be used to connect to the server as a client.

```

/*-----
Description: Simpe TCP Server Example
Filename: main.cpp
-----*/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <dhcpclient.h>
#include <tcp.h>

#define TCP_LISTEN_PORT 23 // Telnet port number
#define RX_BUFSIZE (4096)

//----- Global Vars -----
char RXBuffer[RX_BUFSIZE];

extern "C" {
void UserMain(void * pd);
}

const char * AppName="TCPSrv-NBSimple";

/*-----
Convert an IP address of type IPADDR to a string.
Warning: make sure the output string s has enough storage!
-----*/
void IPtoString(IPADDR ia, char *s)
{
    PBYTE ipb= (PBYTE)&ia;
    sprintf(s, "%d.%d.%d.%d", (int)ipb[0], (int)ipb[1], (int)ipb[2], (int)ipb[3]);
}

/*-----
UserMain
-----*/
void UserMain(void * pd)
{
    InitializeStack();
    if (EthernetIP==0)GetDHCPAddress();
    OSChangePrio(MAIN_PRIO);
    EnableAutoUpdate();
    StartHTTP();

    fprintf("Application started");
    fprintf("My IP Address is: "); ShowIP(EthernetIP);
    fprintf("\r\n");
    while (1)
    {
        // Set up the listening TCP socket
        int fdListen = listen(INADDR_ANY, TCP_LISTEN_PORT, 5);

        if (fdListen > 0)
        {
            IPADDR client_addr;
            WORD port;

            while(1)
            {
                /* Wait to accept incoming connection. Display debug messages to serial

```

```

    port.
    When a connection is terminated, the application will come back to
    this accept() call and wait for another connection.
    */
    fprintf("Waiting for connection on port %d...\n", TCP_LISTEN_PORT);
    int fdnet = accept(fdListen, &client_addr, &port, 0);
    fprintf("Connected to: "); ShowIP(client_addr);
    fprintf(":%d\n", port);

    // Display sign-on message to connecting client
    writestring(fdnet, "Welcome to the NetBurner TCP Server\r\n");
    char s[20];
    IPtoString(EthernetIP, s);
    fprintf(RXBuffer, "You are connected to IP Address %s, port %d\r\n", s,
        TCP_LISTEN_PORT);
    writestring(fdnet, RXBuffer);

    /* Loop while connection is valid. The read() function will return
    0 or a negative number if the client closes the connection, so we
    test the return value in the loop.
    */
    int n = 0;
    do {
        n = read(fdnet, RXBuffer, RX_BUFSIZE);
        RXBuffer[n] = '\0';
        fprintf("Read %d bytes: %s\n", n, RXBuffer);
    } while (n > 0);

    // Don't forget to close !
    close(fdnet);
    }
}
}

```

This is an extremely simple example designed to illustrate how the `accept()` and `listen()` calls operate. It only listens to a single port number, and processes a single connection at a time. Any information sent from the Client will be displayed in the MTTY window. The application does not have the capability to terminate the incoming connection.

We have added the `#defines` for the TCP listen port number, and the incoming TCP buffer storage array size. `RXBuffer[]` is then declared and will hold the received data. The `listen()` function call sets up a socket to listen for an incoming connection from any IP address on port number 23, the Telnet port number.

If the `listen()` succeeds, we then enter a second while loop. The application will then block at the `accept()` function call until an incoming connection is detected, such as when we run the Telnet program on the PC. When this connection is established, the `accept()` function returns and the sign-on message is sent to the Telnet application.

We now enter the do loop: `while (n > 0)`. The `read()` function will block until data is received or an error occurs such as the client terminating the connection. When data is sent from the Telnet application, the `read()` function will return with the data in the `RXBuffer[]` array. The application will stay in this while loop until the connection is terminated by the Telnet client (or you reset the NetBurner device). If the connection is broken by the Telnet client, the application will then loop back to the `accept()` function call and wait for another incoming connection.


Once application initialization is complete and we are running inside the while loop, the application will block on the `accept()` function call.

The `IPtoString()` function is used to convert a numerical IP address of type `IPADDR` to an ASCII string so it can be sent to the client as a sign-on message.




### 11.1.2 Running the NetBurner TCP Server Application


1. (If you have not already done so) Connect a serial cable from your host computer's serial port to your NetBurner board's debug serial port.
2. Start MTTY and connect
3. Compile and download your application to your NetBurner board.
4. Verify that you can see the debug messages for the TCP Server. Note the IP address:

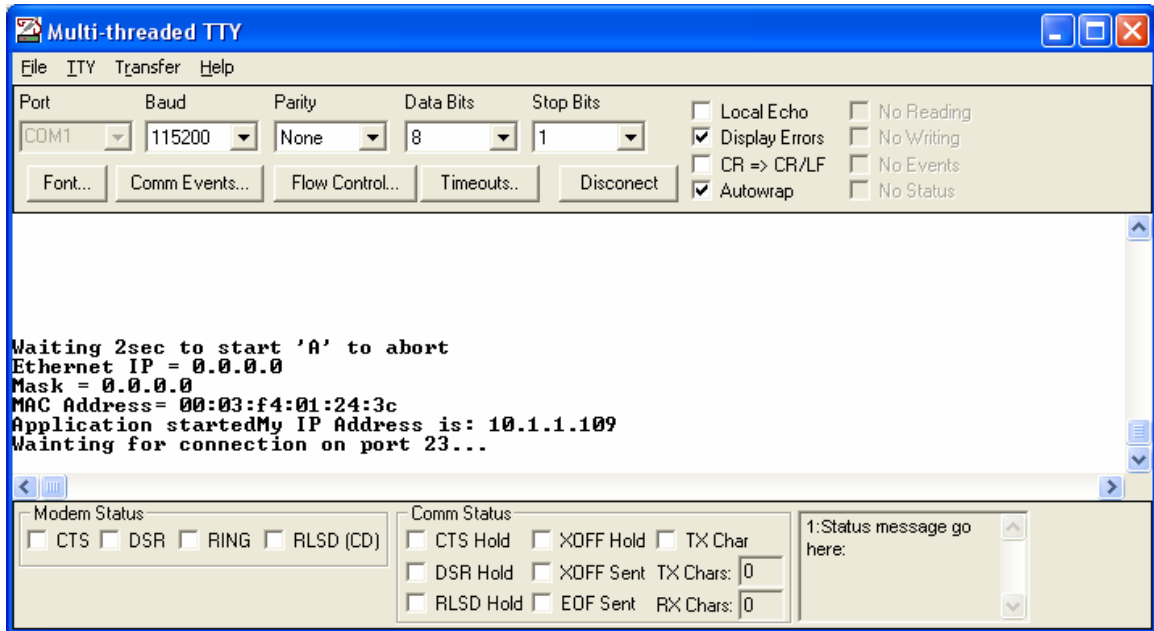


- Run the telnet program on your host computer. This can be done from the Windows Start menu by selecting Start → Run or by opening a DOS window and simply typing “telnet <ip\_addr>”, where <ip\_addr> is replaced by the IP address of your NetBurner device; when finished press the "Enter" key. For example, “telnet 10.1.1.117”. **Note:** You do not need to specify the port number, since the telnet default port number is 23. If you use a different port number, then specify it in the telnet command after the IP address, for example: “telnet 10.1.1.117 4332”. You should see the following screen on a successful connection:

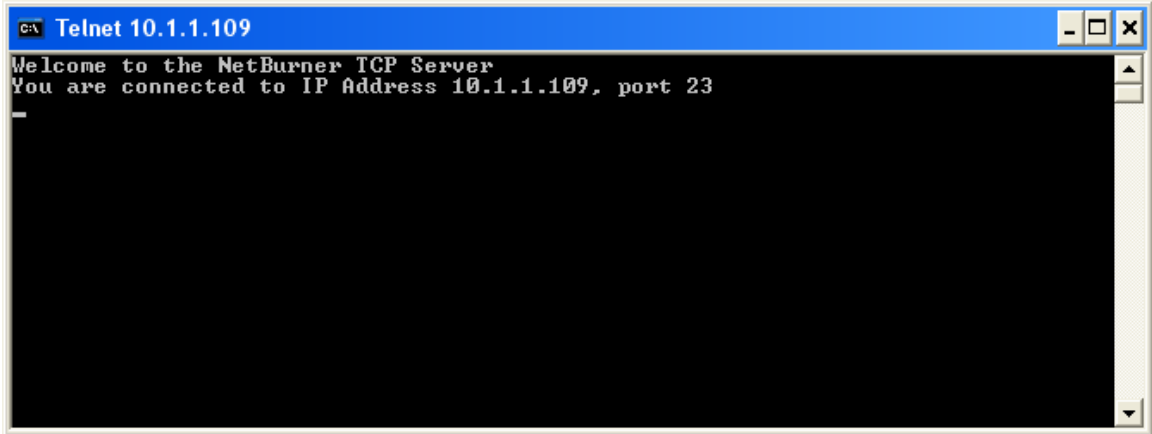

The MTTTY window should confirm the connection:

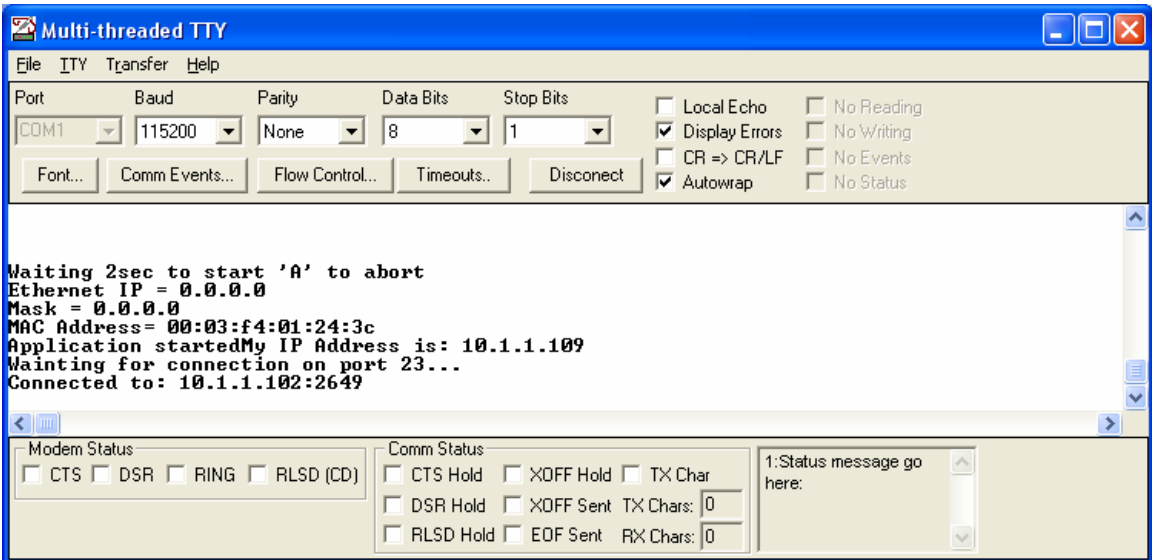

6. Now type some characters in the Telnet window. You should see those characters displayed in the MTTY window as shown below:

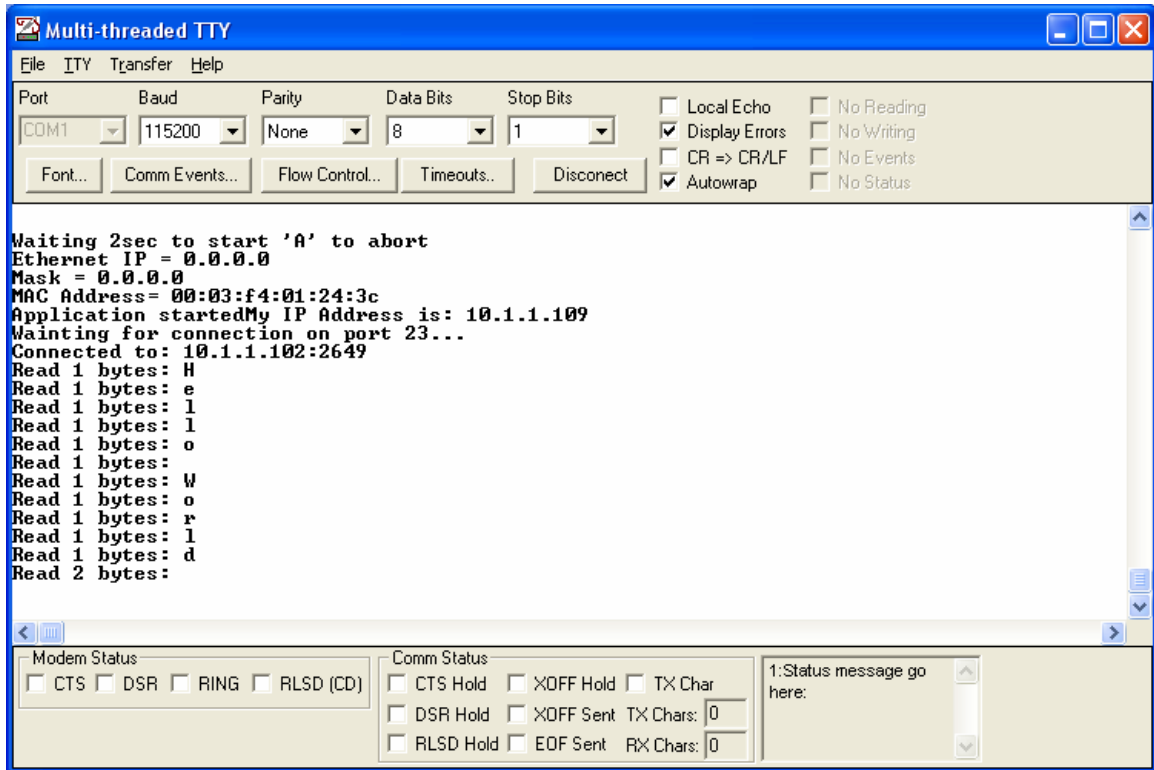

## 2 Writing a Windows TCP Server

Writing a TCP server on the a Windows platform involves a few more steps. As with the NetBurner TCP Server, the windows TCP server application will create a thread that listens for incoming connections on a specific port number. The basic steps are as follows:

1. Create a socket structure variable with `socket()`
2. Initialize the socket structure
3. Bind the socket to a listen address with `bind()`
4. Listen for incoming connections with `listen()`
5. Accept an incoming connection with `accept()`

### 11.1.3 Windows TCP Server Application Source Code

This example program allows you to specify the listen port. Any client connecting to your server will need to know this port number in order to make a connection.

```

1  /*****
2  TCP/IP Server Application
3
4  DESCRIPTION
5  This Win32 console application is a TCP/IP server that will listen
6  for connections on the specified port number. The application
7  is written for Winsock 1.1 compliance.
8
9
10 COMMAND LINE PARAMETERS
11
12 Usage: tcpsrvWin <port> <echo>
13     port = port number to monitor for incoming connections
14     echo = yes to echo request to client, no is default
15
16
17 COMPILILATION INSTRUCTIONS
18     Compile as Windows console application with MS Visual C++ 5.
19     Include WS2_32.lib in linker configuration
20
21
22 REVISION HISTORY
23 1/12/2003 Initial Release
24
25
26 *****/
27
28 #include <winsock.h>
29 #include <stdio.h>
30 #include <stdlib.h>
31 #include <time.h>
32 #include <memory.h>
33
34 #define RX_BUFSIZE (10000)
35
36 //----- functions -----
37 void ProcessCmdLine(int argc, char **argv);
38 DWORD WINAPI ProcessClient(LPVOID lpParam);
39
40
41 //----- global vars -----
42 WORD dListenPort;
43 char szIPAddress[80];
44 BOOL bEcho = FALSE;
45 DWORD dwStartTick, dwEndTick;
46 DWORD dwTotalBytesRead;
47
48 char RxBuf[RX_BUFSIZE];
49
50
51 /*-----
52  FUNCTION: ProcessCmdLine
53
54  DESCRIPTION:
55  Process command line arguments
56
57  RETURNS: Nothing
58  -----*/
59 void ProcessCmdLine(int argc, char **argv)
60 {
61     if (argc < 2)
62     {

```

```

63     printf("Usage: TCPServer <port> <echo>\n");
64     exit(1);
65 }
66
67     dListenPort = (WORD) atoi(argv[1]);
68
69     if (argc > 2)
70     {
71         if (strcmp(argv[2], "echo") == 0)
72             bEcho = TRUE;
73     }
74 }
75
76
77
78 /*-----
79     FUNCTION: ProcessClient
80
81     DESCRIPTION:
82     This function is called as a thread to handle client connections.
83
84     PARAMETERS
85     lpParam is a pointer to the client socket handle.
86
87     RETURNS: 32-bit thread exit code
88     -----*/
89     DWORD WINAPI ProcessClient(LPVOID lpParam)
90     {
91         SOCKET s = (SOCKET)lpParam;
92         int SampleCtr = 0;
93
94         dwTotalBytesRead = 0;
95         while (1)
96         {
97             int bytes_read = recv(s, RxBuf, RX_BUFSIZE, 0);
98             RxBuf[bytes_read] = '\0';
99             printf("Received %d bytes: %s\n", bytes_read, RxBuf);
100            dwTotalBytesRead += bytes_read;
101
102            if ( (bytes_read > 0) && bEcho )
103            {
104                if (send(s, RxBuf, strlen(RxBuf), 0) == SOCKET_ERROR)
105                {
106                    printf("Error sending echo data: %d\n", WSAGetLastError());
107                }
108            }
109            else if (bytes_read == 0)
110            {
111                closesocket(s);
112                exit(0);
113            }
114            else if (bytes_read == SOCKET_ERROR)
115            {
116                printf("recv() error in ProcessClient(): %d\n", WSAGetLastError());
117                break;
118            }
119        }
120        return 0;
121    }
122
123
124
125
126
127 /*-----
128     FUNCTION: main
129
130     DESCRIPTION:
131     Main routine to start network services and listen for connections.
132
133     RETURNS: integer exit code

```

```

134 -----*/
135 int main(int argc, char **argv)
136 {
137     SOCKET sListen, sClient;
138     WSADATA WSAData;
139     struct sockaddr_in sinListen, sinClient;
140
141
142     ProcessCmdLine(argc, argv);
143
144     if (WSAStartup( MAKEWORD(1,1), &WSAData) != 0)
145     {
146         printf("Error loading Winsock\n");
147         return 1;
148     }
149
150     // Create socket to listen on
151     sListen = socket(AF_INET, SOCK_STREAM, 0);
152     if (sListen == SOCKET_ERROR)
153     {
154         printf("Error creating sListen socket: %d\n", WSAGetLastError());
155         return 1;
156     }
157
158     // Setup listen address structure
159     sinListen.sin_addr.s_addr = htonl(INADDR_ANY);
160     sinListen.sin_family = AF_INET;
161     sinListen.sin_port = htons(dListenPort);
162
163     // Bind socket to listen address
164     if (bind(sListen, (struct sockaddr *) &sinListen, sizeof(sinListen)) == SOCKET_ERROR)
165     {
166         printf("bind() error for sListen: %d\n", WSAGetLastError());
167         return 1;
168     }
169
170     // Listen to interface and port
171     if (listen(sListen, 5) == SOCKET_ERROR)
172     {
173         printf("listen() error for sListen: %d\n", WSAGetLastError());
174         return 1;
175     }
176
177     printf("Listening on port: %d...\n", dListenPort);
178     while (1)
179     {
180         int len = sizeof(sinClient);
181         sClient = accept(sListen, (struct sockaddr *) &sinClient, &len);
182         if (sClient == INVALID_SOCKET)
183         {
184             printf("accept() error: %d\n", WSAGetLastError());
185             break;
186         }
187
188         printf("Accepted connection from: %s:%d\n",
189             inet_ntoa(sinClient.sin_addr), ntohs(sinClient.sin_port));
190
191
192
193     /*
194     HANDLE CreateThread(
195         LPSECURITY_ATTRIBUTES lpThreadAttributes, // pointer to thread security
196         attributes
197         DWORD dwStackSize, // initial thread stack size, in
198         bytes
199         LPTHREAD_START_ROUTINE lpStartAddress, // pointer to thread function
200         LPVOID lpParameter, // argument for new thread
201         DWORD dwCreationFlags, // creation flags
202         LPDWORD lpThreadId // pointer to returned thread
203         identifier
204     );

```

```

205     */
206     HANDLE hThread;
207     DWORD dwThreadId;
208     hThread = CreateThread(NULL, 0, ProcessClient, (LPVOID)sClient, 0, &dwThreadId);
209     if (hThread == NULL)
210     {
211         printf("Error creating Client thread: %d\n", GetLastError());
212         break;
213     }
214
215 }
216
217 closesocket(sListen);
218 WSACleanup();
219 return 0;
220 }

```

Line 59: The void `ProcessCmdLine(int argc, char **argv)` function is called at the beginning of `main()` to do what you would expect: process any command line parameters. Specifically, you will pass the listening port number. Whether or not to echo the data sent from the client is optional.

Line 89: The `DWORD WINAPI ProcessClient(LPVOID lpParam)` function is run as a separate thread spawned for the incoming connection. The `recv()` function is used to obtain the data and number of characters. The data and amount is then displayed to the console window with a `printf()`.

If data has been read and the echo option enabled, the data is sent back to the client. If the number of bytes read is zero, or an error has occurred, the socket is closed.

Line 137: Declaration of the listen and client sockets. The client socket will be passed to the thread when it is created.

Line 138: Before you can call any winsock functions, you must load a winsock library. The call to initialize winsock is `WSAStartup()`; when this function returns, the `WSADATA` structure contains the information about the version of winsock that was loaded. The `MAKEWORD(1,1)` macro specifies winsock version 1.1; you could specify `(2,2)` for version 2.2.

Line 139: Winsock applications specify IP addresses and ports using the `SOCKADDR_IN` structure. This line declares structures for the listen and client sockets.

Line 151: Create the listen socket. `AF_INET` specifies the Internet Protocol. The socket type is set to `SOCK_STREAM`; for UDP you would use `SOCK_DGRAM`. The last parameter specifies protocol, and a value of 0 tells the system to pick one based on the other two parameters.

Lines 159-161: Assign values to socket address structure. The functions `htonl()` and `htons()` stand for “host to network long” and “host to network short”, and convert the byte order of long and short variables from the host platform (little endian for a typical pc running Windows) to standard network byte order (big endian). The `INADDR_ANY` parameter specifies that any incoming IP address will be accepted, the `AF_INET` specifies the Internet Protocol family, and the `dListenPort` parameter contains the value of the port the server will listen to.

Line 164: The `bind()` function associates the listen socket with the listen port number.

Line 171: The `listen()` function puts the socket into “listen mode” so it will accept incoming connections. The second parameter, 5, is the number of connections that can be queued (to handle simultaneous incoming connection requests).

Line 181: The `accept()` call accepts an incoming connection. Any pending connections will be serviced first. The second parameter is a pointer to an address structure that will contain the connection information such as IP address and port number. In this case, we pass a pointer to `sinClient`. The third parameter is a pointer to a variable that will contain the length of the address structure. The `accept()` function returns a socket descriptor that corresponds to the new client connection, which can then be used for communication with the client.

Line 208: This example creates a thread to handle an incoming client connection. The `CreateThread()` API call takes the following parameters:

- `ProcessClient`: A pointer to the thread function to execute
- `(LPVOID)sClient`: When creating a thread it is possible to pass a parameter to the function as a pointer. In this case, we are passing the client socket, `sClient`, as pointer. It is later cast back to a socket in line 91.
- `&dwThreadId`: A pointer to a variable that will hold the thread ID once it is created.

When `CreateThread()` is called successfully, the thread will start and the client connection will be processed. When the client connection is terminated, the thread will return and be deleted. The program will then return to the top of the while loop and block at the `accept()` call.

### 11.1.4 Running the Windows TCP Server Application

The application was built as a Win32 console application. To run it, open a command prompt and type “`tcpsrvWin <port>`”, where `<port>` is the listening port number (e.g. 2000). The port number is a 16-bit value, and numbers less than 1024 are reserved.

## 3 Writing a NetBurner TCP Client

While a TCP Server waits for incoming connections, a TCP Client handles the opposite end – it initiates a connection. In order to initiate a connection, the TCP Client must know the destination IP address and port number of the server to which it wishes to make a connection. Writing a TCP Client application on the NetBurner platform only requires one function call to `connect()`:

```
int connect(IPADDR dest_ipaddr, WORD localport, WORD destport, DWORD timeout);
```

where:


- `dest_ipaddr` is the destination IP address (the TCP server in this example)
- `localport` is the local port number of the TCP Client. Remember, 4 items are needed for a connection, and the TCP Client needs to tell the Server what port number it is using.
- `destport` is the destination port number – the one the server is listening on.
- `timeout` allows the `connect()` call to exit if a connection is not made within a specified amount of time. A timeout value of 0 will wait forever.

This example program will combine a number of features covered to this point:


- The application will create a web page interface with input fields for a message to send to the server, the server IP address and the server port number.
- HTML forms will be used to submit user data
- Flash memory non-volatile storage will be used to remember the server IP address and port number.



- The web page interface will invoke the connect() function to create an outgoing connection to a TCP Server and send the message.

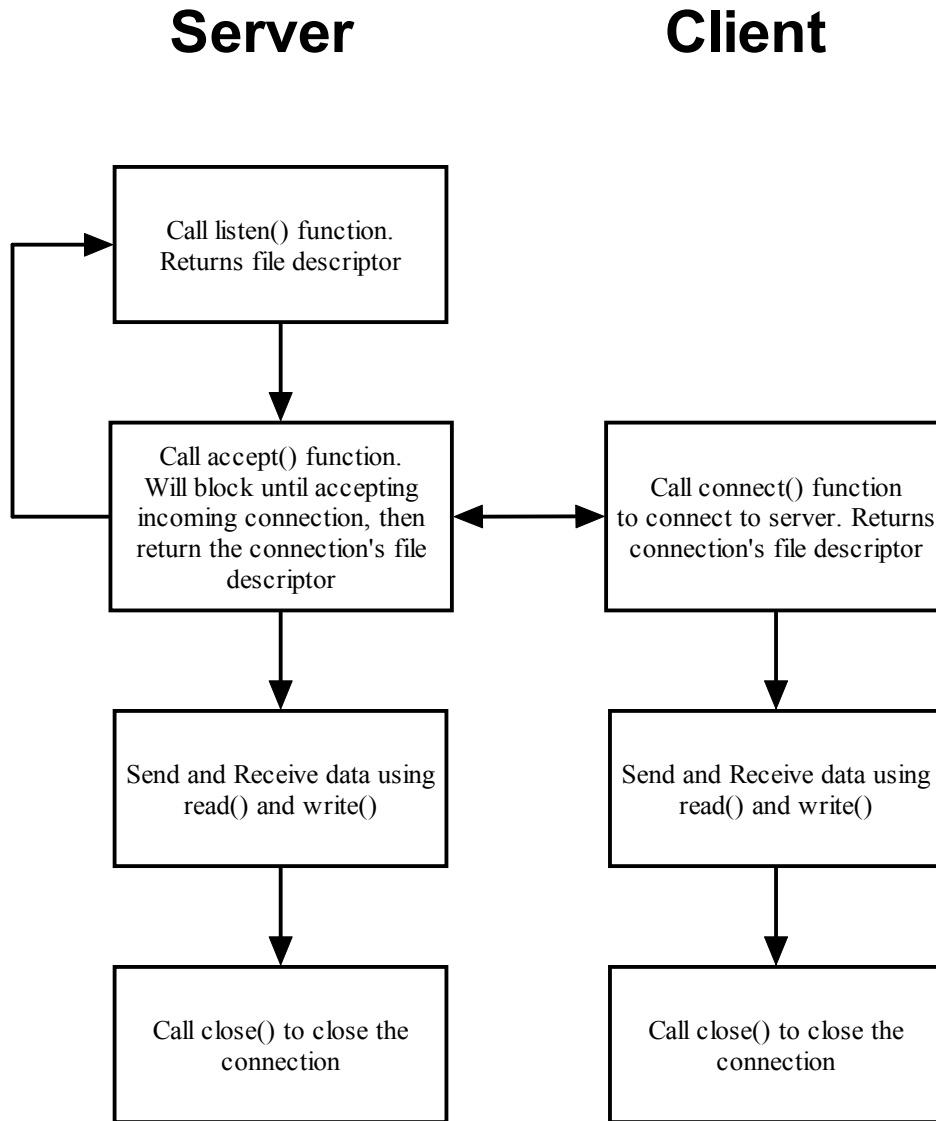

A screen shot of the web interface is shown below:

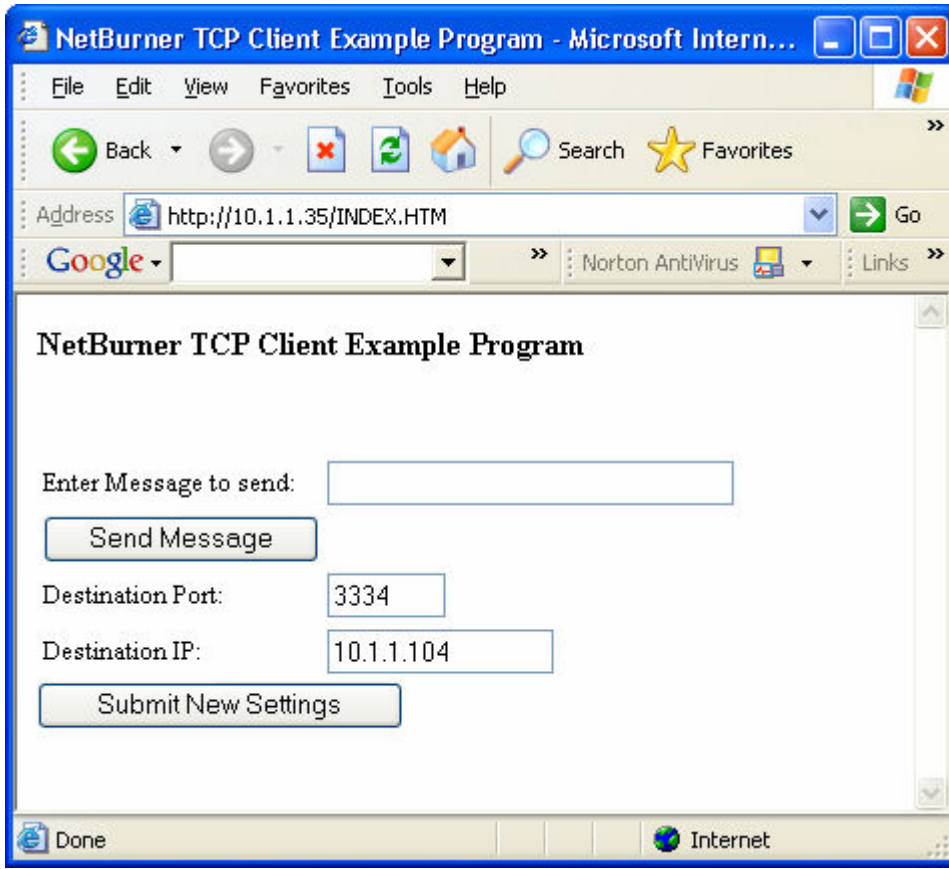

### 11.1.5 NetBurner TCP Client Application Source Code

The TCP Client example code is organized in the following code modules:

File	Description
main.cpp	Application initialization, DHCP and check of flash memory stored parameters.
clientweb.cpp	Handles the dynamic content for the web server interface.
index.htm	HTML code for the web server interface.

### 11.1.6 Main.cpp

Since all of the action occurs through the web server interface, main.cpp is very simple. It initializes the system, does a check for DHCP and calls CheckNVSettings( ) to initialize/load the non-volatile parameters stored in flash memory. CheckNVSettings( ) resides in the clientweb.cpp module. All of these features have been covered in previous examples.

```

1  /*****
2  NetBurner TCP Client Example
3  *****/
4  #include "predef.h"
5  #include <stdio.h>

```

```

6  #include <startnet.h>
7  #include <autoupdate.h>
8  #include <startnet.h>
9  #include <dhcpclient.h>
10 #include "clientweb.h"
11
12
13 //----- Function Prototypes -----
14 extern "C"
15 {
16     void UserMain(void * pd);
17 }
18
19
20 /*-----
21 Check Ethernet IP address and use DHCP if necessary
22 -----*/
23 void CheckDHCP()
24 {
25     if (EthernetIP == 0)
26     {
27         iprintf("IP address is 0.0.0.0, we are trying DHCP...\n");
28         if ( GetDHCPAddress() != DHCP_OK )
29         {
30             iprintf("DHCP failed to initialize, system has IP address of
31                 Zero\r\n");
32         }
33         else
34         {
35             iprintf("DHCP assigned the IP address of :");
36             ShowIP(EthernetIP);
37             iprintf("\n");
38         }
39     }
40 }
41
42
43
44 /*-----
45 User Main
46 -----*/
47 void UserMain(void * pd)
48 {
49     InitializeStack();    // Initialize the TCP/IP Stack
50     CheckDHCP();
51     StartHTTP();         // Start the Web Server
52     EnableAutoUpdate();  // Enable network code updates
53     OSChangePrio(MAIN_PRIO); // Set this task priority
54
55     RegisterPost();      // Register HTML Post function
56     CheckNVSettings();   // Check flash memory storage
57
58     iprintf("My IP Address is: "); ShowIP(EthernetIP);
59     iprintf("\r\n");
60     while (1)
61     {
62         ;
63     }
64 }

```

### 11.1.7 ClientWeb.h

This is the header file for clientweb.cpp, and contains the declarations for functions called by main.cpp.

```

1  #ifndef _NB_CLIENTWEB_H
2  #define _NB_CLIENTWEB_H
3
4
5  //----- Function Prototypes -----
6  void RegisterPost();
7  void CheckNVSettings();
8
9  #endif

```

### 11.1.8 ClientWeb.cpp

This code module handles the dynamic content and web server interface. When the web page is displayed, current values for the port numbers and IP addresses must be displayed. The user must be able to change these values, and also be able to send a message with the submit button.

```

1  /*****
2  NetBurner TCP Client Example
3  This module handles the TCP Client dynamic web page functions
4  *****/
5
6  #include "predef.h"
7  #include <stdio.h>
8  #include <stdlib.h>
9  #include <ctype.h>
10 #include <startnet.h>
11 #include <serial.h>
12 #include <iosys.h>
13 #include <utils.h>
14 #include <ip.h>
15 #include <tcp.h>
16 #include <autoupdate.h>
17 #include <string.h>
18 #include "clientweb.h"
19
20
21 #define APP_VERSION "Version 1.0 1/22/2003"
22 #define DEST_PORT (3334) // default dest port
23 #define DEST_IPADDR "10.1.1.102" // default dest ip addr
24 #define TX_BUFSIZE (4096) // transmit buffer size
25 #define POST_BUFSIZE (4096) // form post buffer size
26 #define VERIFY_KEY (0x18256050) // NV Settings key code
27
28 //----- function prototypes -----
29 extern "C"
30 {
31     void WebDestPort(int sock, PCSTR url);
32     void WebDestIp(int sock, PCSTR url);
33 }
34
35
36 //----- Global Vars -----
37 char TxBuffer[TX_BUFSIZE];
38 char gPostBuf[POST_BUFSIZE];
39
40 #define MAX_IPADDR_LEN (20)
41 struct NV_SettingsStruct // non-volatile storage structure
42 {

```

```

43     DWORD VerifyKey;
44     WORD  nDestPort;
45     char  szDestIpAddr[MAX_IPADDR_LEN];
46 };
47 NV_SettingsStruct NV_Settings;
48
49
50
51
52
53 /*-----
54  Sends a message to the specified destination host.
55  -----*/
56 void SendMsg(char *msg)
57 {
58     char buf[80];
59
60     int fd = connect(AsciiToIp(NV_Settings.szDestIpAddr), 0,
61                    NV_Settings.nDestPort, TICKS_PER_SECOND * 5);
62     if (fd < 0)
63     {
64         printf("Error connecting to: %s:%d\n", NV_Settings.szDestIpAddr,
65              NV_Settings.nDestPort);
66
67         // Add error HTML page
68     }
69     else
70     {
71         int n = write(fd, msg, strlen(msg));
72         printf("Wrote %d bytes: %s\n", n, TxBuffer);
73         close(fd);
74     }
75 }
76
77
78 /*-----
79  Fill in current value of destination port number
80  -----*/
81 void WebDestPort(int sock, PCSTR url)
82 {
83     char buf[80];
84
85     sprintf(buf, "VALUE=\"%d\" ", NV_Settings.nDestPort);
86     writestring(sock, buf);
87 }
88
89 /*-----
90  Fill in current value of destination IP address
91  -----*/
92 void WebDestIp(int sock, PCSTR url)
93 {
94     char buf[80];
95
96     sprintf(buf, "VALUE=\"%s\" ", NV_Settings.szDestIpAddr);
97     writestring(sock, buf);
98 }
99
100
101
102 /*-----
103  Check NV Settings. Assign default values if VerifyKey is not
104  valid.
105  -----*/
106 void CheckNVSettings()
107 {
108     NV_SettingsStruct *pData = (NV_SettingsStruct *)GetUserParameters();
109     NV_Settings.VerifyKey    = pData->VerifyKey;
110
111     if (NV_Settings.VerifyKey != VERIFY_KEY)
112     {
113         NV_Settings.VerifyKey = VERIFY_KEY;

```

```

114     NV_Settings.nDestPort = DEST_PORT;
115     strncpy(NV_Settings.szDestIpAddr, DEST_IPADDR, MAX_IPADDR_LEN);
116
117     SaveUserParameters(&NV_Settings, sizeof(NV_Settings));
118 }
119 else
120 {
121     NV_Settings.nDestPort = pData->nDestPort;
122     strncpy(NV_Settings.szDestIpAddr, pData->szDestIpAddr, MAX_IPADDR_LEN);
123 }
124 }
125
126
127 /*-----
128 Handle HTTP Post
129
130 WARNING WARNING WARNING      CAUTION CAUTION CAUTION
131 The User data space is 8K in size. The object we are storing is
132 less than 200 bytes long, thus it is probably ok to make an automatic
133 variable out of it. It would NOT BE OK to make an 8K automatic
134 variable. The choices for doing this with an 8K object...
135
136 First choice: make a global variable, this way the linker will
137 allocate space for it. All errors will be at link time not run time.
138
139 Second choice: Increase the HTTP stack size in constants.h and
140 recompile the whole system directory.
141
142 Third choice: use malloc and free. The only problem is what do
143 you do if malloc fails?
144 -----*/
145 int MyDoPost(int sock, char * url, char * pData, char * rxBuffer)
146 {
147     int max_chars = 40;
148     char *buf = gPostBuf; // post buffer is global
149
150     iprintf(pData); // print all data sent from app
151
152     if (ExtractPostData("SendMessage", pData, buf, max_chars) > 0)
153     {
154         iprintf("Parsed Send Message Submit\r\n");
155         if (ExtractPostData("tfMessage", pData, buf, max_chars) > 0)
156         {
157             iprintf("Sending Message: %s\r\n", buf);
158             SendMsg(buf);
159         }
160     }
161
162     if (ExtractPostData("SubmitNewSettings", pData, buf, max_chars) > 0)
163     {
164         // Handle Destination Port Number
165         if (ExtractPostData("tfDestPort", pData, buf, max_chars) == -1)
166             iprintf("Error reading post data: tfDestPort\r\n");
167         else
168             NV_Settings.nDestPort = (WORD)atoi(buf);
169
170         // Handle Destination IP Address
171         if (ExtractPostData("tfDestIpAddr", pData, buf, max_chars) == -1)
172             iprintf("Error reading post data: tfDestIpAddr\r\n");
173         else
174         {
175             iprintf("Changing DestIpAddr to: %s\r\n", buf);
176             strncpy(NV_Settings.szDestIpAddr, buf, MAX_IPADDR_LEN);
177         }
178
179         // Now to store it in flash.
180         // WARNING: If new settings are added, remember to add them to
181         // NV Settings default initialization!
182         if (ExtractPostData("SubmitNewSettings", pData, buf, max_chars) > 0)

```

```

185     {
186         NV_Settings.VerifyKey = VERIFY_KEY;
187         if ( SaveUserParameters(&NV_Settings, sizeof(NV_Settings)) != 0 )
188         {
189             fprintf( "New Settings Saved\r\n");
190         }
191         else
192             fprintf( "ERROR: Could not save new settings\r\n");
193     }
194 }
195
196 // We have to respond to the post with a new HTML page. In
197 // this case we will redirect so the browser will go to
198 // that URL for the response.
199 RedirectResponse(sock, "index.htm");
200
201 return 0;
202 }
203
204
205 /*-----
206 Function to allow external code to set new handler.
207 -----*/
208 void RegisterPost()
209 {
210     SetNewPostHandler(MyDoPost);
211 }

```

### 11.1.9 Index.htm

```

1 <HTML>
2 <HEAD>
3 <TITLE>NetBurner TCP Client Example Program</TITLE>
4 </HEAD>
5 <BODY BGCOLOR="#ffffff">
6
7 <FORM ACTION="bogus.htm" METHOD=POST>
8 <B><FONT SIZE="+1">NetBurner TCP Client Example Program</FONT></B><BR><BR>
9
10 <TABLE>
11 <TR>
12 <TD>Enter Message to send: </TD>
13 <TD><INPUT NAME="tfMessage" TYPE="text" SIZE="30"></TD>
14 </TR>
15
16 <TR>
17 <TD><INPUT NAME="SendMessage" TYPE="submit" VALUE="Send Message"></TD>
18 </TR>
19 <BR><BR>
20
21 <TR>
22 <TD>Destination Port: </TD>
23 <TD><INPUT NAME="tfDestPortNum" <!--FUNCTIONCALL WebDestPort --> TYPE="text"
24 SIZE="6"></TD>
25 </TR>
26
27 <TR>
28 <TD>Destination IP: </TD>
29 <TD><INPUT NAME="tfDestIpAddr" <!--FUNCTIONCALL WebDestIp --> TYPE="text" SIZE="15">
30 </TD>
31 </TR>
32 </TABLE>
33
34 <INPUT NAME="SubmitNewSettings" TYPE="submit" VALUE="Submit New Settings">
35
36 </FORM>
37 </BODY>
38 </HTML>

```

#### **4 NetBurner TCP Client Application Operation**

The application boots and executes the initialization functions in main.cpp. From that point forward any information sent will occur through the web server interface. When a user connects to the device using a web server, the information retrieved is defined by the index.htm file.

Examining index.htm, we can see that the WebDestPort and WebDestIp functions are used to supply the current information into the web page text fields. Looking at the functions - WebDestPort( ) and WebDestIp( ) in clientweb.cpp, we can see the current settings are stored as:

```
NV_Settings.szDestIpAddr and NV_Settings.szDestPort.
```

The message to send is entered as a text field as defined by lines 12 and 13 of index.htm. The message is not stored in the NetBurner device, it is just a temporary string displayed in the web browser. To send a message a user clicks on the Send Message submit button as defined on line 17. This is a special HTML command that sends a POST message to the web server containing message to send. This is where the MyDoPost( ) function in clientweb.cpp comes into play. It intercepts the post and takes the appropriate action. In the case of sending a message, on lines 152-160 it extracts the message data and calls the SendMsg( ) function. SendMsg( ) in clientweb.cpp makes a connect( ) call using the passed message and stored values of destination port number and IP address. Once the connection is made, SendMsg( ) calls write( ) to send the message followed by close( ) to terminate the connection.

The second submit button on the form is named "Submit new settings". This is a POST operation like the Send Message described above. MyDoPost( ) uses the ExtractPostData( ) to determine which submit button was selected, then takes appropriate action. In lines 162-193 of clientweb.cpp, the values for the destination port and IP address are extracted, then written to flash memory.

For additional information on TCP, please refer to your User Manual. From Windows: Start → Programs → Netburner NNDK → NNKD Users Manual.



## 12 UDP - User Datagram Protocol

UDP is a datagram-oriented protocol that does not guarantee delivery. TCP is a stream-oriented protocol with guaranteed delivery. With TCP, you do not have control over what data will be sent with each IP datagram, but with UDP datagram will produce one IP datagram. The advantage with UDP is that each datagram can contain one standard piece of data, such as a measurement or command. With TCP, you would have to implement a protocol to identify the beginning, end and type of each piece of data and parse the data stream.

Connectionless: The devices do not establish a connection or establish a data stream. Data is sent as individual datagrams.

Unreliable: No acknowledgements, retransmissions or flow control

### 12.1 Writing a NetBurner UDP Client/Server Application

The NetBurner UDP API is a C++ Class. To create a UDP Server on the NetBurner platform we need to:

1. Create an OS\_FIFO to hold incoming packets
2. Register the UDP FIFO with RegisterUDPFifo(port, &fifo) so it listens to a specific port number
3. Call a UDP constructor such as: UDPPacket upkt(&fifo, timeout);, which will block until a packet is received, then accept and store the packet.


To send a UDP datagram on the NetBurner platform we need to:

1. Declare an instance of a UDP packet
2. Specify the source and destination port numbers, and add data to the packet using the class member functions.
3. Send to a specified IP address using the Send( ) member function.

Looking at the above description and the flow chart below, you will notice an important difference from TCP communication; since there is not a connection between the client and sever, you cannot simply send and receive data using read() and write() functions. You will need to create a UDP packet for each transmission, specifying the port numbers and destination IP address.

## Server

## Client

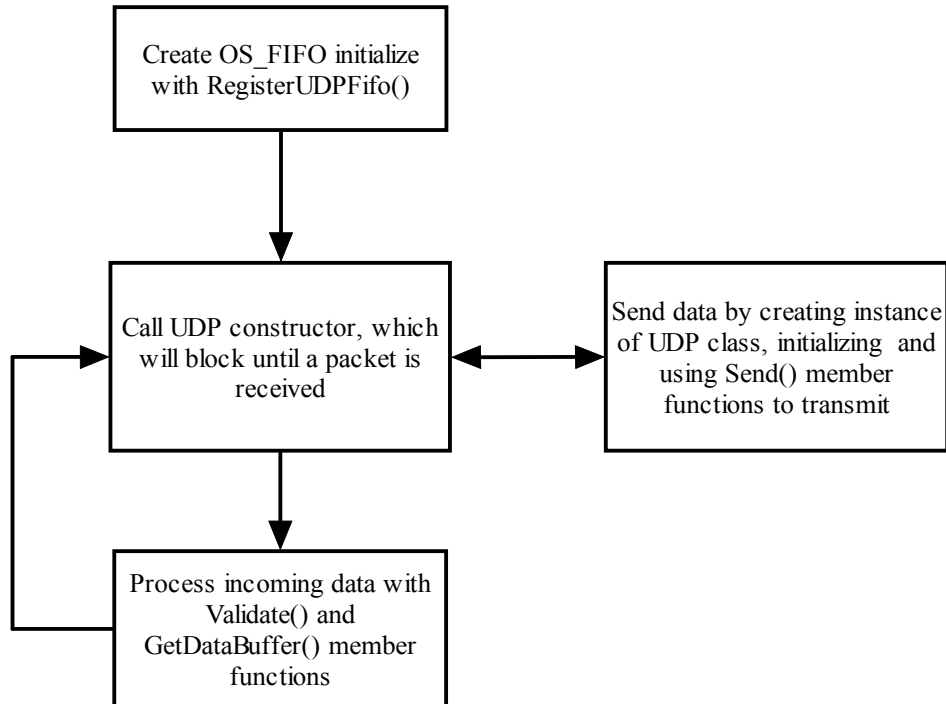

### 12.1.1 NetBurner UDP Application Source Code

```

1  /*-----
2  Description: NetBurner UCP Send/Receive Example Program
3  Filename: main.cpp
4
5  This example program will allow you to send and receive UDP packets to
6  another device or host computer. To run the example, connect a serial
7  port to the debug serial port on your NetBurner device and run a dumb
8  terminal program such as MTTY.
9
10 You will be prompted for the port number to send/receive data and the
11 destination IP address of the other device or host. Note that the
12 application uses the same port number to send and receive data, but
13 you can change this to any other port number you wish.
14
15 The application will create a thread to receive packets and display
16 them on the debug port, while the main task will take any data you
17 type in to the MTTY dumb terminal and send it as a UDP packet to the
18 destination IP address.
19 -----*/
20
21 #include "predef.h"
22 #include <stdio.h>
23 #include <ctype.h>

```

```

24 #include <startnet.h>
25 #include <ucos.h>
26 #include <udp.h>
27 #include <autoupdate.h>
28 #include <dhcpcclient.h>
29
30
31 //----- Global Vars -----
32 // Allocate task stack for UDP listen task
33 DWORD   UdpTestStk[USER_TASK_STK_SIZE];
34
35 extern "C" {
36 void UserMain(void * pd);
37 }
38
39
40 /*-----
41 Check Ethernet IP address and use DHCP if necessary
42 -----*/
43 void CheckDHCP()
44 {
45     if (EthernetIP == 0)
46     {
47         iprintf("IP address is 0.0.0.0, we are trying DHCP...\n");
48         if ( GetDHCPAddress() != DHCP_OK )
49         {
50             iprintf("DHCP failed to initialize, system has IP address of
51                 Zero\r\n");
52         }
53     }
54     else
55     {
56         iprintf("DHCP assigned the IP address of :");
57         ShowIP(EthernetIP);
58         iprintf("\n");
59     }
60 }
61
62
63 /*-----
64 UDP Server task will wait for incoming packets on the
65 designated port number, which is passed as a OSTaskCreate()
66 void * parameter.
67 -----*/
68 void UdpReaderMain(void * pd)
69 {
70     int port = (int)pd;        // cast void * param as int port number
71     iprintf("Listening on port: %d\r\n", port);
72
73     // Create a FIFO for the UDP packet and initialize it
74     OS_FIFO fifo;
75     OSFifoInit(&fifo);
76
77     // Register to listen for UDP packets on port number 'port'
78     RegisterUDPFifo(port, &fifo);
79
80     while (1)
81     {
82         // Construct a UDP packet object using the previously
83         // declared FIFO. The UDP constructor will only return
84         // when a packet has been received. The second parameter
85         // is a timeout value (timeticks). A value of 0 will
86         // wait forever. The TICKS_PER_SECOND definition can
87         // be used for code readability.
88         UDPPacket upkt(&fifo, 0 * TICKS_PER_SECOND);
89
90         // Did we get a valid packet, or just time out?
91         if (upkt.Validate())
92         {
93             WORD len = upkt.GetDataSize();
94             iprintf("Received UDP packet with %d bytes from: ", (int)len);

```

```

95         ShowIP(upkt.GetSourceAddress()); // show ip address
96         iprintf("\r\n");
97
98         ShowData(upkt.GetDataBuffer(), len); // hex dump function
99         iprintf("\r\n");
100     }
101 }
102 }
103
104
105 /*-----
106 User Main
107 -----*/
108 void UserMain(void * pd)
109 {
110     int     portnum;
111     IPADDR  ipaddr;
112     char    buffer[80];
113
114     InitializeStack(); // Initialize the TCP/IP Stack
115     CheckDHCP();
116     EnableAutoUpdate(); // Enable network code updates
117     OSChangePrio(MAIN_PRIO); // Set this task priority
118
119     iprintf("Starting NetBurner UDP Example \r\n");
120     iprintf("Enter the port number: ");
121     scanf("%d", &portnum);
122
123     iprintf("\r\nEnter the destination IP Address: ");
124     buffer[0] = 0;
125     while(buffer[0] == 0)
126     {
127         gets(buffer);
128     }
129     ipaddr = AsciiToIp(buffer);
130
131     iprintf("Listening/Sending on Port %d, Sending to IP address: ", portnum);
132     ShowIP(ipaddr);
133     iprintf("\r\n");
134
135     // Create UDP listen task
136     OSTaskCreate(UdpReaderMain,
137                 (void *)portnum,
138                 &UdpTestStk[USER_TASK_STK_SIZE] ,
139                 UdpTestStk,
140                 MAIN_PRIO - 1); // higher priority than send task
141
142
143     // Main while loop will take any user input and send it as a
144     // UDP datagram.
145     while(1)
146     {
147         gets(buffer);
148         iprintf("Sent \"%s\" to ", buffer);
149         ShowIP(ipaddr);
150         iprintf(":%d\r\n", portnum);
151         {
152             UDPPacket pkt;
153             pkt.SetSourcePort(portnum);
154             pkt.SetDestinationPort(portnum);
155             pkt.AddData(buffer);
156             pkt.AddDataByte(0);
157             pkt.Send(ipaddr);
158         }
159         iprintf("\r\n");
160     }

```

### 12.1.2 Running the Application

1. (If you have not already done so) Connect a serial cable from your host computer's serial port to your NetBurner board's debug serial port.
2. Start MTTTY (from Windows: Start → Programs → Netburner NNDK → Mttty Serial Terminal)
3. Compile and download the application to your NetBurner board.
4. Verify that you see the debug messages for the UDP Client/Server. Note the IP address.
5. Answer the prompts asking for the listening port number and destination IP address and port number of the host PC you will communicate with.
6. Run the UDP Windows Client/Server program on your host computer by opening a command prompt, going to the UDPWin directory, and typing “UDPWin <listen port> <destination ip\_addr> <destination port>”, where the destination IP address and port number are the values associated with the NetBurner device you wish to communicate with. For example, “UDPWin 2500 10.1.1.10 2501”. The destination IP address and port number are used for the client function of the application. You only need the listen port number for the server functionality.
7. If everything is working properly, anything you type in the MTTTY window will be sent as UDP datagrams to the host PC, and vice versa.


For additional information, please refer to your User Manual (from Windows: Start → Programs → Netburner NNDK → NNDK Users Manual).

## **12.2 Writing a Windows UDP Client/Server Application**

While Windows does support a UDP class, it is more difficult to use than the NetBurner class. This example will use the `sendto()` and `receivefrom()` functions to send and receive UDP datagrams.

## Server

## Client

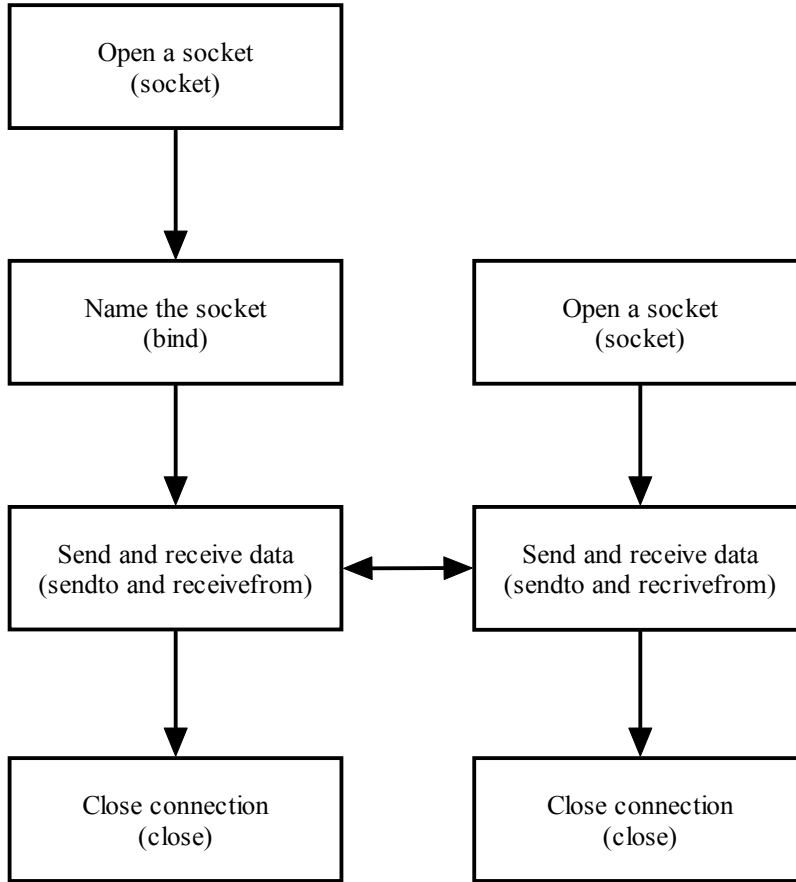

### 12.2.1 Windows UDP Application Source Code

```

1  /*****
2  UDP Windows Application
3  File Name: UDPWin.cpp
4
5  DESCRIPTION
6  This Win32 console application will send and receive UDP packets
7
8
9  COMMAND LINE PARAMETERS
10
11 Usage: UDPWin <listen port> <dest ip> <dest port>
12
13 where
14     listen port = port number to monitor for incoming datagrams
15     dest ip = destination IP address
16     dest port = destination port number
  
```

```

17
18
19 COMPILILATION INSTRUCTIONS
20     Compile as Windows console application with MS Visual C++ 5.0
21     Include WS2_32.lib in linker configuration
22
23
24 REVISION HISTORY
25 2/3/2003 Initial Release
26
27 *****/
28
29 #include <winsock.h>
30 #include <stdio.h>
31 #include <stdlib.h>
32
33 #define RX_BUFSIZE (10000)
34
35 //----- functions -----
36 void ProcessCmdLine(int argc, char **argv);
37 DWORD WINAPI ReceiveUDP(LPVOID lpParam);
38
39
40 //----- global vars -----
41 WORD dListenPort, dDestPort;
42 char szDestIPAddr[80];
43 char RxBuf[RX_BUFSIZE];
44
45
46 /*-----
47  FUNCTION: ProcessCmdLine
48
49  DESCRIPTION:
50  Process command line arguments
51
52  RETURNS: Nothing
53  -----*/
54 void ProcessCmdLine(int argc, char **argv)
55 {
56     if (argc < 4)
57     {
58         printf("Usage: UDPWin <listen port> <dest ip> <dest port>\n");
59         exit(1);
60     }
61
62     dListenPort = (WORD) atoi(argv[1]);
63     strncpy(szDestIPAddr, argv[2], 80);
64     dDestPort = (WORD) atoi(argv[3]);
65 }
66
67
68
69 /*-----
70  FUNCTION: ProcessClient
71
72  DESCRIPTION:
73  This function is called as a thread to handle client connections.
74
75  PARAMETERS
76  lpParam is a pointer to the client socket handle.
77
78  RETURNS: 32-bit thread exit code
79  -----*/
80 DWORD WINAPI ReceiveUDP(LPVOID lpParam)
81 {
82     SOCKET s = (SOCKET) lpParam;
83     struct sockaddr_in sinFrom;
84
85     while (1)
86     {
87         printf("Listening on port: %d...\n", dListenPort);

```

```

88
89
90     /*
91     The recvfrom( ) API function has the following parameters:
92
93     recvfrom(SOCKET s,           // socket to receive from
94              char *buf,         // point to buffer to store rec'd data
95              size_t len,       // length of buffer or # of bytes to read
96              int flags,        // flags (normally use 0)
97              struct sockaddr *from, // client data returned
98              int *fromlen      // size of client data struct
99              )
100    */
101    int len = sizeof(sinFrom);
102    int bytes = recvfrom(s, RxBuf, RX_BUFSIZE, 0,
103                       (struct sockaddr *)&sinFrom, &len );
104    if (bytes == SOCKET_ERROR)
105    {
106        printf("recvfrom() error: %d\n", WSAGetLastError());
107        break;
108    }
109
110    printf("Received packet from: %s:%d\n",
111          inet_ntoa(sinFrom.sin_addr), ntohs(sinFrom.sin_port));
112    printf("Bytes read: %d: \\", bytes);
113    for (int i=0; i < bytes; i++)
114        printf("%c", RxBuf[i]);
115    printf("\\\n");
116
117    }
118    return 0;
119 }
120
121
122
123 /*-----
124 FUNCTION: main
125
126 DESCRIPTION:
127 Main routine to start network services and listen for connections.
128
129 RETURNS: integer exit code
130 -----*/
131 int main(int argc, char **argv)
132 {
133     SOCKET    sListen, sSend;
134     WSADATA   WSADATA;
135     struct sockaddr_in sinListen, sinSend;
136
137     ProcessCmdLine(argc, argv);
138
139     if (WSAStartup( MAKEWORD(1,1), &WSADATA) != 0)
140     {
141         printf("Error loading Winsock\n");
142         return 1;
143     }
144
145     // Create socket to listen for UDP datagrams
146     sListen = socket(AF_INET, SOCK_DGRAM, 0);
147     if (sListen == SOCKET_ERROR)
148     {
149         printf("Error creating sListen socket: %d\n", WSAGetLastError());
150         return 1;
151     }
152
153     // Setup listen address structure
154     sinListen.sin_addr.s_addr = htonl(INADDR_ANY);
155     sinListen.sin_family = AF_INET;
156     sinListen.sin_port = htons(dListenPort);
157
158     // Bind socket to listen address

```



```

159     if (bind(sListen, (struct sockaddr *) &sinListen,
160         sizeof(sinListen)) == SOCKET_ERROR)
161     {
162         printf("bind() error for sListen: %d\n", WSAGetLastError());
163         return 1;
164     }
165
166     /*
167     Create and start thread to receive UDP packets.
168
169     HANDLE CreateThread(
170         LPSECURITY_ATTRIBUTES lpThreadAttributes, // ptr to attributes
171         DWORD dwStackSize, // initial thread stack size, in bytes
172         LPTHREAD_START_ROUTINE lpStartAddress, // pointer to thread function
173         LPVOID lpParameter, // argument for new thread
174         DWORD dwCreationFlags, // creation flags
175         LPDWORD lpThreadId // pointer to returned thread identifier
176     );
177
178     DWORD dwThreadId;
179     HANDLE hThread;
180     hThread = CreateThread(NULL, 0, ReceiveUDP, (LPVOID) sListen, 0, &dwThreadId);
181
182     // Create socket to send UDP datagrams
183     sSend = socket(AF_INET, SOCK_DGRAM, 0);
184     if (sSend == INVALID_SOCKET)
185     {
186         printf("Error creating sSend socket: %d\n", WSAGetLastError());
187         return 1;
188     }
189
190     // name the socket
191     sinSend.sin_family = AF_INET;
192     sinSend.sin_addr.s_addr = inet_addr(szDestIPAddr);
193     sinSend.sin_port = htons(dDestPort);
194
195     printf("Enter data to send to %s:%d\n", szDestIPAddr, dListenPort);
196
197     while (1)
198     {
199         /*
200          The sendto function is used to write outgoing data on a socket.
201          For message-oriented sockets, care must be taken not to exceed
202          the maximum packet size of the underlying subnets. You can get
203          the size information from the getsockopt() API call. See the
204          microsoft documentation for more information.
205
206          The sendto( ) API function has the following parameters:
207
208          int sendto(
209              SOCKET s,
210              const char* buf, // buffer containing the data to be transmitted
211              int len, // length of data in buf
212              int flags, // indicator specifying the way in which the call is made
213              const struct sockaddr* to, // optional ptr to dest address structure
214              int tolen // size of address structure in bytes
215          );
216
217          */
218          char TxBuf[512];
219          gets(TxBuf);
220          if (TxBuf[0] == '\0')
221              break;
222          else
223          {
224              int len = sizeof(sinSend);
225              sendto(sSend, TxBuf, strlen(TxBuf), 0,
226                  (struct sockaddr *)&sinSend, len );
227              if (sSend == INVALID_SOCKET)
228              {
229                  printf("sendto() error: %d\n", WSAGetLastError());
230                  break;

```

```

230         }
231     }
232     printf("Sent packet to: %s:%d\n",
233         inet_ntoa(sinSend.sin_addr), ntohs(sinSend.sin_port));
234 }
235 }
236
237 closesocket(sListen);
238 closesocket(sSend);
239 WSACleanup();
240 return 0;
241 }

```

Starting in `main()`, the `ProcessCmdLine(int argc, char **argv)` function is called at the beginning of `main()` to do what you would expect: process any command line parameters. Specifically, you will pass the listening port number, destination port number and destination IP address.

Before you can call any winsock functions, you must load a winsock library. The call to initialize winsock is `WSAStartup()`; when this function returns, the `WSADATA` structure contains the information about the version of winsock that was loaded. The `MAKEWORD(1,1)` macro specifies winsock version 1.1; you could specify `(2,2)` for version 2.2.

The listen socket, `sListen`, is then created with:

```
sListen = socket(AF_INET, SOCK_DGRAM, 0);
```

`AF_INET` specifies the Internet Protocol. The socket type is set to `SOCK_DGRAM`; for TCP you would use `SOCK_STREAM`. The last parameter specifies protocol, and a value of 0 tells the system to pick one based on the other two parameters.

Winsock applications specify IP addresses and ports using the `SOCKADDR_IN` structure, which is declared as `sinListen` in our program. The functions `htonl()` and `htons()` stand for “host to network long” and “host to network short”, and convert the byte order of long and short variables from the host platform (little endian for a typical pc running Windows) to standard network byte order (big endian). The `INADDR_ANY` parameter specifies that any incoming IP address will be accepted, the `AF_INET` specifies the Internet Protocol family, and the `dListenPort` parameter contains the value of the port the server will listen to.

The `bind()` function associates the listen socket with the listen port number.

A separate thread is created to handle an incoming datagrams. The `CreateThread()` API call takes the following parameters:

- `ReceiveUDP`: A pointer to the thread function to execute
- `(LPVOID)sListen`: When creating a thread it is possible to pass a parameter to the function as a pointer. In this case we are passing the listening socket, `sListen`, as pointer. It is later cast back to a socket in the `ReceiveUDP()` thread.
- `&dwThreadId`: A pointer to a variable that will hold the thread ID once it is created.

When `CreateThread()` is called successfully, the thread will start and begin listening for incoming datagrams. Each time a datagram arrives the sender information and data will be displayed.

Now that the application can receive incoming datagrams, we need to have a method of sending outgoing datagrams. An outgoing socket is created with the line:

```
sSend = socket(AF_INET, SOCK_DGRAM, 0);
```

As with sListen, the sSend socket needs a SOCKADDR\_IN structure. The sinSend is declared and initialized to allow datagrams to be sent to the host destination IP address and destination port number specified on the command line.

The application then enters a while(1) loop that waits for user input strings and sends those strings using the sendto() function.

## 12.2.2 Running the Windows UDP Application

The application was built as a Win32 console application. To run it, open a command prompt and type:

“UDPWin <listen port> <dest IP> <dest port>” (and then press the "Enter" Key)

where <listen port> is the local port number to listen for incoming datagrams, <dest IP> and <dest port> are the IP address and port number of the host or device you wish to send datagrams to. For example,

```
UDPWin 2500 10.1.1.15 2501
```

will listen on port 2500, and send any data you type into the console to the host or device at 10.1.1.15:2501.

## 12.3 Writing a Windows JAVA UDP Client/Server Application

This example is a UDP Client/Server written in Java that can be run on any host computer running the Java Virtual Machine (JVM). This includes Windows, Unix, Linux, etc. **Note:** The NetBurner platform does not run the JVM.

To create a UDP Server on the NetBurner platform:

1. Create a DatagramSocket
2. Create a DatagramPacket
3. Use the receive() member function to block for incoming packets and store the packet.

To send a UDP datagram on the NetBurner platform:

1. Create a DatagramPacket
2. Use the send() member function to send the packet

### 12.3.1 Windows Java UDP Application Source Code

```

1  /*****
2  This is a UDP example Java application to send and receive UDP datagrams.
3  It will listen on a port for incoming UDP packets, and allow the user to
4  send strings as UDP datagrams to another host.
5
6  This application can run on Windows, Unix or Linux hosts with the Java
7  Virtual Machine installed. It is not designed to run on the NetBurner
8  platform.
9
10 Revision 1.0, May 31, 2003
11
```

```

12 *****/
13
14 import java.net.*;
15 import java.io.*;
16
17 /*-----
18 UDP Server Class
19 This class will:
20 1. Parse command line parameters for the local port number,
21    destination ip address, and destination port number.
22
23 2. Obtain the local host name and ip address, then display all
24    parameters to the console.
25
26 3. Declare an instance of the client UDP class, which will
27    handle local host user input and allow the user to send
28    strings.
29
30 4. Start the UDP server thread that will loop forever listening
31    for incoming UDP packets on the designated port. All
32    incoming messages will be displayed to the console window
33    along with the sender's ip address and port number.
34 -----*/
35 public class udpserver {
36     protected DatagramSocket dgSocket;    // declare socket
37
38     // Constructor
39     public udpserver (int port) throws IOException {
40         dgSocket = new DatagramSocket(port);    // allocate socket
41     }
42
43     // execute() loop to wait for incoming datagram packets
44     public void execute()throws IOException {
45         while (true)
46         {
47             byte buffer[] = new byte[65536];
48             DatagramPacket dgPacket = new DatagramPacket(buffer, buffer.length);
49             dgSocket.receive(dgPacket);
50
51             System.out.print("Rec'd From: " + dgPacket.getAddress());
52             System.out.print(": " + dgPacket.getPort());
53             System.out.print(", " + dgPacket.getLength() + " bytes: \"");
54             String msg = new String(buffer, 0, dgPacket.getLength());
55             System.out.println(msg + "\"\n");
56         }
57     }
58
59
60     public static void main(String args[]) throws IOException {
61         int ListenPort, DestPort;
62         String DestIP;
63
64         if (args.length != 3)
65             throw new RuntimeException("Syntax:  udpserver <listen port> <dest IP> <dest
66 port>");
67         ListenPort = Integer.parseInt(args[0]);
68         DestIP      = args[1];
69         DestPort    = Integer.parseInt(args[2]);
70
71         // Display command line parameters
72         System.out.println("Listen Port: " + ListenPort);
73         System.out.println("Dest IP      : " + DestIP);
74         System.out.println("Dest Port   : " + DestPort);
75
76         InetAddress LocalHost = InetAddress.getLocalHost();
77         System.out.println("Local Host Name: " + LocalHost.getHostName());
78         System.out.println("Local Host IP Addr: " + LocalHost.getHostAddress());
79
80         // Create instance of udpserver class
81         udpserver serverUDP = new udpserver(ListenPort);
82         System.out.println("Starting UDP echo server, listening on port " + ListenPort);

```

```

83
84
85 // Convert destination IP string to InetAddress type
86 InetAddress DestAddr = InetAddress.getByName(DestIP);
87
88 // Start thread to accept user input strings and send them
89 // as UDP datagrams. This is the client side of this example
90 clientUDPThread ct = new clientUDPThread(DestAddr, DestPort);
91 ct.start();
92
93 // Start server execution to receive UDP datagrams
94 serverUDP.execute();
95 }
96 }
97
98
99
100 /*-----
101 UDP Client Class
102 This class simply waits for user input from the console, creates
103 a UDP datagram with the input data, and sends the datagram to
104 the designated destination host.
105 -----*/
106 class clientUDPThread extends Thread {
107
108     int DestPort;
109     InetAddress DestAddr;
110     protected DatagramSocket dgSocket; // declare socket
111
112     public clientUDPThread(InetAddress DestinationAddr, int DestinationPort) throws
113     IOException
114     {
115         dgSocket = new DatagramSocket(DestPort); // allocate socket
116         DestAddr = DestinationAddr;
117         DestPort = DestinationPort;
118     }
119
120     public String GetUserInput()
121     {
122         String s = "";
123
124         try {
125             while (true) {
126                 char c = (char)System.in.read();
127                 if (c == '\r') {
128                     c = (char)System.in.read();
129                     if (c == '\n') {
130                         break;
131                     } else {
132                         continue;
133                     }
134                 } else if (c == '\n') {
135                     break;
136                 } else {
137                     s += c; // store char
138                 }
139             } // while
140
141         }
142         catch (Exception e) {
143             System.err.println("Exception: " + e.toString());
144         }
145         return s;
146     }
147
148
149     public void run()
150     {
151         while (true)
152         {
153             String msg = GetUserInput();

```

```
154         byte[] buffer = msg.getBytes();
155         System.out.println("Sending Message: \"" + msg + "\"");
156         DatagramPacket packet = new DatagramPacket(buffer,
157             buffer.length, DestAddr, DestPort);
158         try {
159             dgSocket.send(packet);
160         } catch (Exception e) {
161             System.err.println("Exception: " + e.toString());
162         }
163     }
164 }
165
```

### 12.3.2 Running the Windows Java UDP Application

To run the application you will need to have the Java SDK installed. If you need to obtain the software package, go to <http://www.javasoft.com> and download it free of charge. Once installed, verify you have the correct path by opening a DOS window and typing "java" at the prompt and press the "Enter" key. If your path is correct, you will see the Java usage information message. If your path is incorrect, you will see an error message indicating the command is not recognized. Follow the Java installation documents to perform a correct installation.

To compile the application, open a command prompt and go to the directory containing the source code. The default directory is java\JavaWin. To compile the example, type "**javac udp serv.java**". The compilation will produce a file called `udp serv.class`.

To run the application, now type:

```
"java udp serv <listen port> <dest IP> <dest port>"
```

where <listen port> is the local port number to listen for incoming datagrams, <dest IP> and <dest port> are the IP address and port number of the host or device you wish to send datagrams to. For example,

```
"udp serv 2500 10.1.1.15 2501"
```

will listen on port 2500, and send any data you type into the console to the host or device at 10.1.1.15:2501.

As a quick test you can run two instances of the application on your host pc. In the following example you will need to replace the IP address with the correct IP address for your host computer.

1. Open two command windows
2. In the first window, type "java udp serv 3000 10.1.1.100 4000"
3. In the second window, type "java udp serv 4000 10.1.1.100 3000".
4. Now anything you type in one window will appear in the other. Note that user input will only be sent once the enter key is pressed.

For additional information on UDP, please refer to your User Manual. From Windows: Start → Programs → Netburner NNKD → NNKD Users Manual.

## 13 uC/OS Real-Time Operating System

### 13.1 Overview

The uC/OS Operating system is a full featured pre-emptive multitasking Real-Time Operating System (RTOS). You can easily create tasks, semaphores, mail boxes and queues just to name a few features. As part of the NetBurner development package, the RTOS is pre-configured, integrated and running a default user task named UserMain() that can be used as your main program task.

The RTOS provides 63 priority levels numbered from 1 to 63. The lower the number, the higher the priority. Some of these tasks are reserved by the system, such as the idle task at level 63. You can specify a priority when the task is created, and change the priority later if you wish. A priority level can only be used by one task at a time. Be sure to check the return values when creating a task or changing a task priority to verify that the operation was successful.

The uC/OS system files are located in the \nburn\system directory. They are:

ucos.c	uC/OS function source code
ucosmain.c	uC/OS helper, debug and start-up functions. Also has the stack definition for the idle task.
ucosmfc.c	ColdFire specific uC/OS functions. Specifically, this code module contains the OSTaskCreate() function, initializes the Task Control Blocks, and contains the stack checking code.
ucosmfca.s	Contains the assembler functions for the ColdFire port of uC/OS, including functions for task switching and the timer. Note that the file extension of “.s” designates an assembly language file.
main.c	Contains the main() function that does some system initialization and creates UserMain().

### 13.2 Pre-emptive Operation and Blocking

In a pre-emptive RTOS, the highest priority task ready to run will always run. This is an extremely important point, so I will mention it again: the highest priority task ready to run will always run. This is different than a Windows or Unix system that employs a round-robin approach in which each task will run based on its time slice. If you create a high priority task that can always run, then no lower priority tasks will ever run. Lower priority tasks can only run when a higher priority task blocks on a resource or time delay.

uC/OS functions that can cause a task to block:

```
OSTimeDly()
OSSemPend()
OSMPend()
OSQPend()
```

I/O system calls that can cause a task to block

```
select()
read() // including all variants with timeouts
write() // unitl at least one char can be written
gets()
```



```
getchar ()
fgets ()
```

Network calls can cause a task to block:

```
Accept ()
Creation of a UDP packet when initialized with received data
```

Functions that can be used to enable a task to be “ready to run”:

```
OSMBoxPost ()
OSQPost ()
OSSemPost ()
OSTimeTick ()
```

Lets say you have two tasks: A and B. Task A has priority 50 and Task B has priority 51. Since Task A is of higher priority, it will always run (and Task B will never run) unless it calls a blocking function. Task B will then run for as long as Task A blocks; this could be 1 second due to a call to OSTimeDly(TICKS\_PER\_SECOND), until a shared resource is available due to a call to OSSemPend(), or until data is available from a network connection due to a select() call. If both tasks were in a blocking state, then the idle task (63) would run.

### 13.3 Default Configuration and Resources

The number and types of system tasks that will be running depends on which options and features you are using in your specific application. For example, if your application called StartHTTP( ) to enable web services, then a system task will be created that handles web server requests. The following is a list of system tasks. The default values are specified in \nburn\include\constants.h. The table below shows the information for the SB72 platform.

Name	Default Priority	Description
Ethernet Driver	38	Handles packets sent to the Ethernet hardware
IP Protocol	39	Handles the IP layer of the TCP/IP protocol stack
TCP Protocol	40	Handles the TCP layer of the TCP/IP protocol stack.
PPP Protocol	44	Handles the PPP layer of the TCP/IP protocol stack
HTTP Protocol	45	Handles the HTTP application for the web server.
Main Priority	50	This is a macro used for the default UserMain( ) priority.
Idle	63	What does the RTOS do when it has nothing important to do? It runs the Idle Task, which just loops and does nothing.

### 13.4 Creating Tasks

Whether you use the AppWizard in the IDE to create a new application, or start with one of the example programs, you will notice that the point at which you take control of the device is at the function called UserMain( ). The UserMain( ) task is a uC/OS task created by the system for you to use in your application. Normally, the first few lines will consist of system initialization functions such as the functions described in the Template example.

To create additional tasks, you use the OSTaskCreate( ) function. The following is an example program that allocates the task stack, implements a new task function, and launches the new task.

```

/*****
Multiple task example
This program creates 2 tasks and send prints messages from each.
*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <ucos.h>
#include <dhcpclient.h>

//----- function prototypes -----
extern "C"
{
    void UserMain( void *pd );
}

DWORD MyTaskStack[USER_TASK_STK_SIZE];

/*-----
MyTask
-----*/
void MyTask( void *pdata )
{
    WORD data = *( WORD * ) pdata; // cast passed parameter

    iprintf( "Data passed to MyTask(): %d\r\n", data );

    while ( 1 )
    {
        iprintf( "    Message from MyTask()\r\n" );
        OSTimeDly( TICKS_PER_SECOND ); // this is a blocking call
    }
}

/*-----
UserMain
-----*/
void UserMain( void *pd )
{
    InitializeStack();
    OSChangePrio( MAIN_PRIO );

    if ( EthernetIP == 0 )
    {
        iprintf( "Attempting DHCP\r\n" );
        if ( GetDHCPAddress() != DHCP_OK )
            iprintf( "*** DHCP Failed\r\n" );
        else
            iprintf( "DHCP IP Address: " );
    }
    else
        iprintf( "Static IP Address: " );
    ShowIP(EthernetIP);iprintf( "\r\n" );

    EnableAutoUpdate();

    // This example passes data to the task, but this is optional

```

```

WORD MyTaskData = 1234;

/* Create and launch the task. Note that we selected a priority of
   MAIN_PRIO+1, which means the new task is of lower priority than UserMain.
   The implication is that if UserMain does not block, MyTask will never
   run.
*/
if ( OSTaskCreate( MyTask,
                  ( void * ) &MyTaskData,
                  ( void * ) &MyTaskStack[USER_TASK_STK_SIZE],
                  ( void * ) MyTaskStack,
                  MAIN_PRIO + 1 ) != OS_NO_ERR )
{
    iprintf( "*** Error creating task\r\n" );
}

while ( 1 )
{
    OSTimeDly( TICKS_PER_SECOND * 2 );
    iprintf( "Message from UserMain()\r\n" );
}
}

```

### 13.5 Interrupts

To obtain specific information on interrupts used in your specific NetBurner device, please reference the Platform Documents that came with the development kit. Some common values and their functions are shown below:

Name	Interrupt Level	Description
Serial ports (UARTS)	3	Interrupts when a character is received or transmitted. Note: The NetBurner monitor operates in polled mode. To enable interrupts your application must close the serial ports with SerialClose(), then open them with OpenSerial().
Ethernet	4	Ethernet receive and transmit.
System Timer	5	This is the RTOS system timer. By default it generates an interrupt 20 times per second. If necessary, this rate can be changed in \nburn\include\constants.h with: #define TICKS_PER_SECOND. This value should stay within the range of 10 to 200. For high resolution timing, we recommend using a different timer.

## 14 Protecting Shared Data Structures

### 14.1.1 Overview

The following RTOS mechanisms can be used to protect shared data resources. They are listed in a decreasing order of severity as regarding system latency (all pend and post functions are at the same level).

OSSemPend() OSSemPost()	Protects an area of memory or resource. A task calls OSSEmPend, which will block until the resource is available. OSSEmPost releases the resource.
OSMboxPend() OSMboxPost()	Same as semaphore, except a pointer variable is passed as the “message”. A task or ISR can post a message, but only a task can pend on a message. Both the posting task and pending task must agree on what the pointer points to.
OSQPend() OSQPost()	A Queue is basically an array of mailboxes. It is used to post one or more messages. When you initialize a Queue, you must specify the maximum number of messages. The first message posted to the queue will be the first message extracted from the queue (FIFO).
OSFifoPend() OSFifoPost() OSFifoPostFirst() OSFifoPendNoWait()	A FIFO is similar to a queue, but is specifically designed to pass pointers to OS_FIFO structures. The first parameter of the structure must be a (void *) element, which is used by the operating system to create a linked list of FIFOs. When initializing a FIFO, you do not specify the maximum number of entries as with a queue. Instead, your application has the ability (and responsibility) to allocate memory (static or dynamic) in which to store the structures. This can be done statically by declaring global variables, or dynamically by allocating memory from the heap. As with a queue, the first message posted to the FIFO will be the first message extracted from the queue.
OSCritEnter OSCritExit OSCritObj	This is a counted critical section that restricts access to resources to one task at a time, sometimes called a “mutex”. For example, you have a linked list that is maintained by 3 separate tasks. If one task is manipulating the list, you could first call OSCirtEnter for that object (the list). If any other task tries to manipulate the list, it will block at the OSCritEnter until the task that previously called OSCritEnter, calls OSCritExit. Note that the number of enter calls must match number of exit calls.  OSCritObj is a C++ implementation that uses scoping to automatically call the enter and exit functions. See example below.
OSLock() OSUnlock() OSLockObj	Disables other tasks, but not interrupts. Increments for each OSLock, decrements for each OSUnlock. The C++ object OSLockObj was created to assist in making sure that an unlock is called for each lock. When an OSLockObj is created, the constructor calls OSLock(). When the object goes out of scope, OSUnlock() is automatically called by the destructor.
USER_ENTER_CRITICAL USER_EXIT_CRITICAL	Macro that disables other tasks and interrupts. Increments count on enter, decrements on exit.

How do you decide which type of mechanism to use? Some guidelines are:

- If you need some type of signal, but do not need to pass any data, use a Semaphore. A semaphore is a single 32-bit integer that increments and decrements for each pend or post.
- If you want to pass a single 32-bit number, you can use a Mailbox or Queue. Most applications use the 32-bit number as the data, but it could also be a pointer to a structure or object. A queue is like an array of mailboxes. You declare the number of queue entries a compile time.
- If you want to pass a structure or object, then use a FIFO. You may be wondering how a FIFO differs from a Queue. The difference is that a Queue has a predefined number of entries. The FIFO implementation uses a linked list, so the only limit to the number of entries is available memory. Using a FIFO is not as simple as any of the other mechanisms, because your application must implement some type of memory management to allocate and deallocate the FIFO objects. This is usually done by managing a predeclared array of objects, or through dynamic memory allocation. We encourage all embedded designers to avoid dynamic memory allocation if at all possible, since in any embedded system memory fragmentation could eventually occur and the call to allocate a new object could fail. If you create an array of objects at compile time you will always be guaranteed the maximum number can exist.

### 14.1.2 Semaphore Example

A semaphore is a protected variable that is used to control access to shared system resources (such as memory or serial ports), to signal the occurrence of events and task synchronization. A task can request a semaphore and wait until the resource or event takes place (called pending). A task can also post to a semaphore to indicate it no longer needs a resource, or to signal an event has taken place.

To create a semaphore you declare one of type `OS_SEM` and initialize with `OSSemInit()`:

```
OS_SEM MySemaphore;
OSSemInit( &MySemaphore, 0 ); // set initial value to 0
```

Your application tasks can now use the post and pend functions on the semaphore:

```
OSSemPost( &MySemaphore ); // post to a semaphore
OSSemPend( &MySemaphore, 0 ); // pend on a semaphore
```

The second parameter in the `OSSemPend()` function specifies the number of time ticks to wait. A value of 0 waits forever. A good way to express a wait value is to use the `TICKS_PER_SECOND` definition provided by the RTOS: `OSSemPend( &MySemaphore, TICKS_PER_SECOND * 5 )` to wait 5 seconds.

```

/*****
Semaphore Example Program
This program will create 2 tasks and a semaphore. The UserMain task will
block for a semaphore posted from MyTask.

The output for this example is displayed through the serial debug port, which
can be viewed with the MTTY program.

*****/
#include <predef.h>
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <ucos.h>
#include <serial.h>
#include <dhcpcclient.h>
```

```

//----- function prototypes -----
extern "C"
{
    void UserMain( void *pd );
}

//----- Global Variables
const char * AppName = "Semaphore Example";
DWORD MyTaskStack[USER_TASK_STK_SIZE];
OS_SEM MySemaphore;

/*-----
MyTask
This task will post to a semaphore every 3 seconds
-----*/
void MyTask( void *pdata )
{
    while ( 1 )
    {
        OSTimeDly( TICKS_PER_SECOND * 3 );
        iprintf( "      MyTask: Posted to Semaphore\r\n" );
        OSSemPost( &MySemaphore );
    }
}

/*-----
UserMain
-----*/
void UserMain( void *pd )
{
    InitializeStack();
    if ( EthernetIP == 0 )
    {
        iprintf( "Attempting DHCP\r\n" );
        GetDHCPAddress();
        iprintf( "DHCP IP Address: " );
    }
    else
        iprintf( "Static IP Address: " );
    ShowIP(EthernetIP);iprintf( "\r\n" );

    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();

    OSSemInit( &MySemaphore, 0 );

    if ( OSTaskCreate( MyTask,
                      NULL,
                      ( void * ) &MyTaskStack[USER_TASK_STK_SIZE],
                      ( void * ) MyTaskStack,
                      MAIN_PRIO + 1 ) != OS_NO_ERR )
    {
        iprintf( "*** Error creating task\r\n" );
    }

    // The while loop will pend on MySemaphore and display a message
    // when a post is detected.
    while ( 1 )
    {
        iprintf( ">>> UserMain: Pending on Semaphore from MyTask\r\n" );
        OSSemPend( &MySemaphore, 0 );
    }
}

```

```

    iprintf( "<<< UserMain: Semaphore was posted from MyTask!\r\n\r\n" );
}
}

```

### 14.1.3 Mailbox Example

A mailbox is similar to a semaphore, except a pointer variable is passed as the “message”. A task or ISR can post a message, but only a task can pend on a message. Both the posting task and pending task must agree on what the pointer points to.

```

/*****
Multiple task user input example.
This program illustrates how to create a task and use a mailbox to accept
user input from a serial port.

1. UserMain task will wait pend on a mailbox for user input
2. UserInput task will block waiting for a user to type in data from the
   serial port
3. This example also illustrates how to terminate a task

*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <ucos.h>
#include <serial.h>
#include <string.h>
#include <dhcpcclient.h>

//----- function prototypes -----
extern "C"
{
    void UserMain( void *pd );
}

//----- global vars -----
DWORD    UserInputTaskStack[USER_TASK_STK_SIZE];
OS_MBOX  UserInputMbox;
BOOL     bExitUserInputTask;

/*-----
UserInputTask
Once created, this task will loop forever
-----*/
void UserInputTask( void *pdata )
{
    char strInput[100];

    while ( !bExitUserInputTask )
    {
        iprintf( "User Input:" );
        fgets(strInput, 80, stdin);
    }
}

```

```

// remove \r\n if present
int len = strlen(strInput);
iprintf("Received %d bytes\r\n", len);
if ( len >= 2 )
{
    for (int i=0; i < 2; i++)
    {
        if ( ( strInput[len-i] == '\r' ) || ( strInput[len-i] == '\n' ) )
            strInput[len-i] = '\0';
    }
}

OSMboxPost( &UserInputMbox, ( void * ) strInput );
}

// Not much to do in this example once the task exits
iprintf("*** UserInputTask() terminated. Please reset program ***\r\n");
}

/*-----
UserMain
-----*/
void UserMain( void *pd )
{
    InitializeStack();
    if ( EthernetIP == 0 )
    {
        iprintf( "Attempting DHCP\r\n" );
        if ( GetDHCPAddress() != DHCP_OK )
            iprintf("*** DHCP Failed\r\n");
        else
            iprintf( "DHCP IP Address: " );
    }
    else
        iprintf( "Static IP Address: " );
    ShowIP(EthernetIP);iprintf( "\r\n" );

    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();

    iprintf( "Starting program\r\n" );

    OSMboxInit( &UserInputMbox, NULL );

    bExitUserInputTask = FALSE;
    if ( OSTaskCreate( UserInputTask,
                     NULL,
                     ( void * ) &UserInputTaskStack[USER_TASK_STK_SIZE],
                     ( void * ) UserInputTaskStack,
                     MAIN_PRIO + 1 ) != OS_NO_ERR )
    {
        iprintf( "*** Error creating task\r\n" );
    }

    while ( 1 )
    {
        BYTE err;

        // Wait forever for user input
        void *pmsg = OSMboxPend( &UserInputMbox, 0, &err );
        iprintf( "\r\nUserMain Received: \"%s\"\r\n\r\n", ( const char * ) pmsg );
    }
}

```



```

    // If user input was "exit", then send exit signal to UserInputTask()
    if ( strcmp((const char *)pmsg, "exit") == 0 )
        bExitUserInputTask = TRUE;
}
}

```

#### 14.1.4 FIFO Example

A FIFO is similar to a queue, but is specifically designed to pass pointers to OS\_FIFO structures. The first parameter of the structure must be a (void \*) element, which is used by the operating system to create a linked list of FIFOs. When initializing a FIFO, you do not specify the maximum number of entries as with a queue. Instead, your application has the ability (and responsibility) to allocate memory (static or dynamic) in which to store the structures. This can be done statically by declaring global variables, or dynamically by allocating memory from the heap. As with a queue, the first message posted to the FIFO will be the first message extracted from the queue.

```

/*****
FIFO Example Program

This program creates two tasks and a FIFO. Messages are sent from one task
to another using the FIFO. A timeout value for the pend function is used to
illustrate the timeout feature of the FIFO.

*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <ucos.h>
#include <serial.h>
#include <dhcpcclient.h>

#define NUM_POSTS (5)

//----- function prototypes -----
extern "C"
{
    void UserMain( void *pd );
}

//----- structs -----
typedef struct // Pointers to this structure will be passed in the FIFO
{
    void * pUsedByFifo; // Don't modify this value, and keep it first
    int x; // Any other members come after the pointer
} MyStructure;

//----- global vars -----
DWORD FifoPostTaskStack[USER_TASK_STK_SIZE];
OS_FIFO MyFIFO;
MyStructure StructArray[5];

```

```

/*-----
FIFO Post Task
-----*/
void FifoPostTask( void *pdata )
{
    while ( 1 )
    {
        iprintf("\r\n");
        for ( int i = 0; i < NUM_POSTS; i++ )
        {
            StructArray[i].x = i;
            OSFifoPost( &MyFIFO, ( OS_FIFO_EL * ) &StructArray[i] ); // Put a message in
the Fifo.
            iprintf( "    Posted FIFO value %d\r\n", i );
        }
        iprintf("\r\n");

        OSTimeDly( TICKS_PER_SECOND * 9 );
    }
}

/*-----
UserMain
-----*/
void UserMain( void *pd )
{
    DWORD FifoCnt = 0;

    InitializeStack();
    if ( EthernetIP == 0 )
    {
        iprintf( "Attempting DHCP\r\n" );
        if ( GetDHCPAddress() != DHCP_OK )
            iprintf("*** DHCP Failed\r\n");
        else
            iprintf( "DHCP IP Address: " );
    }
    else
        iprintf( "Static IP Address: " );
    ShowIP(EthernetIP);iprintf( "\r\n" );

    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();

    OSFifoInit( &MyFIFO );

    if ( OSTaskCreate( FifoPostTask,
        NULL,
        ( void * ) &FifoPostTaskStack[USER_TASK_STK_SIZE],
        ( void * ) FifoPostTaskStack,
        MAIN_PRIO - 1 ) != OS_NO_ERR )
    {
        iprintf( "*** Error creating task\r\n" );
    }

    while ( 1 )
    {
        iprintf( ">>> Calling OSFifoPend()...\r\n" );
        MyStructure *pData = ( MyStructure * ) OSFifoPend( &MyFIFO, TICKS_PER_SECOND
* 5 );
        if ( pData == NULL )
        {

```

```

        // Because of the OSTimeDly() in the post task, we will timeout
        // once per sequence on purpose.
        iprintf( "    Timeout in OSFifoPend()\r\n" );
    }
    else
    {
        iprintf( "    FIFO Read #%d, value: %d\r\n", FifoCnt++, pData->x );
    }
}
}

```

### 14.1.5 OSCritObject Example

OSCritEnter(), OSCritExit() and an OSCritObj are enable an application to use counted critical sections that restrict access to resources to one task at a time (also called a “mutex”). For example, you have a linked list that is maintained by 3 separate tasks. If one task is manipulating the list, you could first call OSCritEnter() for that object (the list). If any other task tries to manipulate the list, it will block at the OSCritEnter() call in that task until the task that previously called OSCritEnter(), calls OSCritExit(). Since this is a counting critical section implementation, the number of enter calls must match number of exit calls for each task.

OSCritObj is a C++ implementation that uses scoping to automatically call the enter and exit functions so you do not need to manually match each enter with an ext.

In comparison with OsLock, OsCritEnter does not restrict task swapping unless two tasks want to access the same resource. If you used OsLock, then ALL task swapping would be prevented.

```

{ // opening scope operator

    // Now create an OSCriticalSectionObj object. When the object gets
    // created, the constructor will be called, which will call
    // OSCritEnter

    OSCriticalSectionObj oscs(TCP_critical_section);

    // your source code goes here . . .

} // destructor gets call when object goes out of scope, which call
    OSCritExit

```

## 15 File Descriptors

### 15.1 Overview

The NetBurner development package integrates the uC/OS operating system, TCP/IP stack and other system peripherals with a file I/O system and file descriptors. A **file descriptor** is a handle to a network socket, serial port or other system peripheral. Many of the API functions pass a file descriptor to your application functions, such as the web server MyGet function example in this guide.

There are a maximum of 64 file descriptors:

- 0 – 3 for stdin, stdout and stderr
- 3 – 4 for the first two UART serial ports
- 5 – 37 for TCP (32 in total)
- 38 – 63 for expansion

The expansion file descriptor positions can be used for many things, including additional serial ports, such as an external UART, or TCP ports.

### 15.2 Creating Custom I/O Drivers Using File Descriptors

The header file in `\nburn\include\iointernal.h` defines the programming interface functions to create a custom file descriptor. The header file content for tools release 1.98 is shown below, but be sure to check the header file for your particular tools installation for the latest function definitions.

```
void SetDataAvail( int fd );
void ClrDataAvail( int fd );

void SetWriteAvail( int fd );
void ClrWriteAvail( int fd );

void SetHaveError( int fd );
void ClrHaveError( int fd );

struct IoExpandStruct
{
    int ( * read ) ( int fd, char *buf, int nbytes );
    int ( * write ) ( int fd, const char *buf, int nbytes );
    int ( * close ) ( int fd );
    void *extra;
};

int GetExtraFD( void *extra_data, struct IoExpandStruct *pFuncs );
void *GetExtraData( int fd );
void FreeExtraFd( int fd );

// The TCP state call back, fd = socket has new data, fd < 0 means error
typedef void ( tcp_read_notify_handler )( int tcp_fd );

// When data comes in or the TCP connection enters an error state,
// register a callback to handle the event
void RegisterTCPReadNotify( int tcp_fd, tcp_read_notify_handler *newhandler );
```

The Set and Clr functions are used to update the state of your fd device for file I/O functions such as select( ), read( ) and write( ). The IoExpandStruct is used to declare function pointers for the read, write and close functions that will be implemented in your application, as well as an “extra” void pointer that you can use for whatever you wish.

GetExtraFD( ) is the function that will return a fd for the object passed as the IoExpandStruct. The extra\_data void pointer is optional, and can be used to pass data into your fd. You can read the extra\_data value at any time with the GetExtraData( ) function. FreeExtraFd( ) will release the fd back to the pool of available fds.

The tcp\_read\_notify\_handler and RegisterTCPReadNotify are callback functions. These functions will get called by the system if you define them for the corresponding TCP event.

### 15.3 Using File Descriptors to Pend on Multiple Events

Once you have created a file descriptor you can use the select( ) function call just as you would for network or serial file descriptors. In fact, you can pend on a mixture of them all at the same time.

### 15.4 Example: Circular Buffer Implementation Using File Descriptors

The following example uses file descriptors to implement a circular buffer.

```

/*****
The NetBurner sytem software has support for creating your own
custom I/O device as a "file descriptor". It is encapsulated in
the nburn\include\iointernal.h header file.

This is a trivial example of creating a circular buffer file
descriptor. It will create a 256 byte circular buffer that
you can write() to and read() from. The 256 byte size makes the
circular buffer wrap around easy - just use bytes and the
rollover math is simple

In any real world example of a new I/O dvice the device would
probably be interrupt driven. For interrupts, you should
use USER_ENTER_CRITICAL and USER_EXIT_CRITICAL to protect the
internal data structures.

The 6 fd status functions are interrupt safe:
void SetDataAvail( int fd );
void ClrDataAvail( int fd );

void SetWriteAvail( int fd );
void ClrWriteAvail( int fd );

void SetHaveError( int fd );
void ClrHaveError( int fd );
*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <dhcpclient.h>
#include <smarttrap.h>
#include <taskmon.h>

```

```

#include <iointernal.h>

const char * AppName = "ExtraFD Example";

static IoExpandStruct cb_ioexpand;

extern "C"
{
    void UserMain( void *pd );
}

// A circular buffer object, referred to as a "cbo"
struct CircularBufferObject
{
    OS_CRIT critical_section;    // Critical section to make it task safe.
    BYTE get_pointer;           // Where we get chars in the buffer
    BYTE put_pointer;           // Where we put chars in the buffer
    char data_buffer[256];      // Data storage space
};

/*-----
   Function to read from the circular buffer
   -----*/
int cbo_read( int fd, char *buf, int nbytes )
{
    // Get the cbo object associated with this fd
    CircularBufferObject * pCbo = ( CircularBufferObject * ) GetExtraData( fd );

    int number_read = 0;

    // Set up the critical section so we have exclusive access
    OSCritEnter( &pCbo->critical_section, 0 );

    // If both get and put pointers point at each other, there is nothing in
    // the buffer, otherwise we can read the data.
    if ( pCbo->get_pointer != pCbo->put_pointer )
    {
        // Read as long as data is available and we have not read the max allowed
        while ( ( pCbo->get_pointer != pCbo->put_pointer ) && ( number_read < nbytes ) )
        {
            *buf++ = pCbo->data_buffer[pCbo->get_pointer++];
            number_read++;
        }

        if ( pCbo->get_pointer == pCbo->put_pointer )
        {
            // We have read everything. Now update the status so fd functions like
            // select() will work properly
            ClrDataAvail( fd );
        }
    }
    // We had some data to read

    if ( number_read > 0 )
    {
        // We have read something so there should now be space in the write buffer
        // update status for select() function
        SetWriteAvail( fd );
    }
}

```

```

    OSCritLeave( &pCbo->critical_section );

    return number_read;
}

/*-----
   Function to write to the circular buffer
   -----*/
int cbo_write( int fd, const char *buf, int nbytes )
{
    // Get the cbo object associated with this fd
    CircularBufferObject * pCbo = ( CircularBufferObject * ) GetExtraData( fd );

    int number_written = 0;

    // Enter the critical section
    OSCritEnter( &pCbo->critical_section, 0 );

    if ( ( BYTE ) ( pCbo->put_pointer + 1 ) != pCbo->get_pointer )
    {
        // We can write data while there is space and we have bytes to write
        while ( ( ( BYTE ) ( pCbo->put_pointer + 1 ) != pCbo->get_pointer ) &&
            ( number_written < nbytes ) )
        {
            pCbo->data_buffer[pCbo->put_pointer++] = *buf++;
            number_written++;
        }

        if ( ( BYTE ) ( pCbo->put_pointer + 1 ) == pCbo->get_pointer )
        {
            // Buffer is full, so mark the fd as full
            ClrWriteAvail( fd );
        }

        if ( number_written )
        {
            // We wrote something so we have data ready to be read
            SetDataAvail( fd );
        }
    }

    OSCritLeave( &pCbo->critical_section );
    return number_written;
}

/*-----
   Function to close a fd
   -----*/
int cbo_close( int fd )
{
    // Normally you would have to clean up your I/O device before closing it.
    // Here we just close the fd.
    FreeExtraFd( fd );
    return 0;
}

/*-----
   Function to open the circular buffer, which returns the file
   descriptor that will be associated with the circular buffer object
   passed as the function parameter.
   -----*/

```

```

-----*/
int OpenCircularBuffer( CircularBufferObject *pCbo )
{
    // First initialize my circular buffer
    pCbo->get_pointer = 0;
    pCbo->put_pointer = 0;
    OSCritInit( &pCbo->critical_section );

    // Set up the I/O expand function to point at the cbo functions
    cb_ioexpand.read = cbo_read;
    cb_ioexpand.write = cbo_write;
    cb_ioexpand.close = cbo_close;

    // Get the fd for the cbo
    int fde = GetExtraFD( ( void * ) pCbo, &cb_ioexpand );

    // Now set up the file descriptor state for our fd
    ClrDataAvail( fde ); // no data to be read
    SetWriteAvail( fde ); // space available for writes
    ClrHaveError( fde ); // no errors yet

    return fde;
}

/*-----
UserMain
-----*/
void UserMain( void *pd )
{
    InitializeStack();
    if ( EthernetIP == 0 )
    {
        GetDHCPAddress();
    }
    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();
    EnableSmartTraps();
    EnableTaskMonitor();

    // Create the circular buffer objects. In this example we will create 2
    static struct CircularBufferObject cb1, cb2;

    // Open the buffers
    int fdcb1 = OpenCircularBuffer( &cb1 );
    int fdcb2 = OpenCircularBuffer( &cb2 );

    iprintf( "Application started\r\n" );
    while ( 1 )
    {
        // Write to the circular buffers
        writestring( fdcb1, "Testing circular buffer #1" );
        writestring( fdcb2, "Testing circular buffer #2" );

        OSTimedly( TICKS_PER_SECOND ); // Delay so loop runs slow

        // Read the data out of buffer 1
        while ( dataavail( fdcb1 ) )
        {
            char buf[2];
            int rv = read( fdcb1, buf, 1 );
            if ( rv == 1 )
            {

```



```
        fprintf( "[%c]", buf[0] );
    }
}
fprintf( "\r\n" );

// Read the data out of buffer 2
while ( dataavail( fdc2 ) )
{
    char buf[2];
    int rv = read( fdc2, buf, 1 );
    if ( rv == 1 )
    {
        fprintf( "(%c)", buf[0] );
    }
}
fprintf( "\r\n" );
}
```

## 16 Multiple Network Interfaces

The NetBurner network devices can have multiple interfaces, both in software as multi-home, and in hardware, such as a WiFi or second Ethernet port. Multi-home means that you can enable your NetBurner device to have more than one IP address. For example, you could be 10.1.1.1, and 192.168.1.1.

### 16.1 Multiple Hardware Interfaces (Ethernet, WiFi, PPP)

You can have up to 3 network interfaces on a single NetBurner device. For example, you can have a primary Ethernet interface, and also a WiFi interface. If you are designing your own hardware, you can also add an additional Ethernet interface, for a total of 2 or 3. Unlike Multi-home, these additional hardware interfaces will have their own MAC address, and can use DHCP simultaneously. To add interfaces we will use the netinterface API as previously discussed in the Change IP section of this document.

In this example we will add a WiFi interface, which is accomplished with the following API call from `\nburn\include\wifi.h`:

```
int AddWiFiInterface( BOOL adhoc = FALSE );
```

In this case, the SSID and WEP key would be configured in IPSetup.

You can also set up the WiFi parameters and start the interface separately. See the include file and NNDK Users Guide for more information.

#### 16.1.1 WiFi Interface Example

The following example adds a WiFi interface to a NetBurner module with an existing Ethernet interface.

```
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <dhcpclient.h>
#include <wifi.h>
#include <netinterface.h>
#include <taskmon.h>

extern "C"
{
    void UserMain( void *pd );
}

void ShowArp();

const char *AppName = "wifi_infrastructure";
int nwifi_if;

void DisplayMenu()
{
    iprintf( "--- Main Menu ---\r\n" );
    iprintf( "A - Show ARP Cache\r\n" );
}
```

```

    iprintf( "C - Show Counters\r\n" );
    iprintf( "I - Show WiFi ID\r\n" );
    iprintf( "W - Show WiFi networks available\r\n" );
    iprintf( "P <IP Address> - Ping\r\n" );
    iprintf( "? - Display Menu\r\n" );
}

/*-----
This function pings the address given in buffer
-----*/
void ProcessPing( char *buffer )
{
    IPADDR addr_to_ping;
    char *cp = buffer;

    // Trim leading white space
    while ( ( *cp ) && ( isspace( *cp ) ) )
    {
        cp++;
    }

    // Get the address or use the default
    if ( cp[0] )
    {
        addr_to_ping = AsciiToIp( cp );
    }
    else
    {
        addr_to_ping = EthernetIpGate;
    }

    iprintf( "\nPinging : " );
    ShowIP( addr_to_ping );
    iprintf( "\n" );

    int rv = PingViaInterface( addr_to_ping, 1/*Id */, 1 /*Seq */, 100/*Max Ticks*/,
nwifi_if );
    if ( rv == -1 )
    {
        iprintf( " Failed! \n" );
    }
    else
    {
        iprintf( " Response Took %d ticks\n", rv );
    }
}

/*-----
Handle commands with a trivially simple command dispatcher
-----*/
void ProcessCommand( char *buffer )
{
    switch ( toupper( buffer[0] ) )
    {
        case 'A':
            ShowArp(); break;
        case 'C':
            ShowCounters(); break;

        case 'I':
            char SSID_Test[40];
            if ( GetCurrentSSID( SSID_Test, 40 ) > 0 )
            {

```

```

        iprintf( "Current SSID=[%s]\r\n", SSID_Test );
    }
    else
    {
        iprintf( "Failed to read SSID \r\n" );
    }

    if ( WiFiConnected() )
    {
        iprintf( "Currently connected\r\n" );
    }
    else
    {
        iprintf( "Not currently connected\r\n" );
    }
    break;
case 'W':
    WiFiShowScanForAP();
    break;
case 'P':
    ProcessPing( buffer + 1 );
    break;
case '?':
    DisplayMenu(); break;

default:
    break;
} //Switch
}

void UserMain( void *pd )
{
    InitializeStack();
    if ( EthernetIP == 0 )
    {
        GetDHCPAddress();
    }

    nwifi_if = AddWiFiInterface();
    if ( InterfaceIP( nwifi_if ) == 0 )
    {
        GetDHCPAddress( nwifi_if );
    }
    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();
    StartHTTP();
    EnableTaskMonitor();

    iprintf( "Application started\n" );
    DisplayMenu();
    while ( 1 )
    {
        char buffer[255];
        buffer[0] = 0;

        // Remove blank lines from \r\n conversions and ignore whitespace
        while ( buffer[0] == 0 )
        {
            gets( buffer );
        }

        ProcessCommand( buffer );
    }
}

```

## 16.2 Multi-Home

Multi-home means that your device can respond to more than one IP address. However, your device has only one MAC address, so there are some limitations, such as the fact DHCP can only be used on one of your interfaces since a separate MAC address is required for each DHCP client.

To add Multi-Home functionality to your application:

1. Uncomment the “#define MULTIHOME” in `\nburn\include\predef.h`. Multi-home is disabled by default at a system level so that non-multi-home applications do not incur the overhead of the Multi-home functionality.
2. Add the following includes in your application:
 

```
#include <multihome.h>
#include <netinterface.h>
```
3. Use the API function:
 

```
int AddInterface( IPADDR addr, IPADDR mask, IPADDR gateway, int root_if = 0 );
```

 to add additional interfaces. You must specify the first 3 parameters.
4. Select “Rebuild All” from the DevCpp build menu so the system library is rebuilt. Rebuild All only needs to be called when you make a change to a system file. Any changes to your project only require a project build.

### 16.2.1 Multi-Home Example Program

```
/*
*****
Multihome application example.
*/
```

This program will demonstrate how to implement both a DHCP address and static IP address using the Multihome functionality of the NetBurner TCP/IP Stack. The NetBurner device will try to obtain a dynamic IP address from a DHCP Server for the first Network Interface, and set a static IP address for the second Network Interface. The end result is that the NetBurner device will respond to either IP address. The example will print debug information out the debug serial port, and display the IP address information on a web page that can be accessed from either IP address.

To enable multihome capability, you must uncomment the MULTIHOME definition in the include file `\nburn\include\predef.h`, and rebuild the system files. If using the IDE, select Build->Rebuild All, If using the command line, go to `\nburn\system` and run `"make clean"`.

```
*****/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <dhcpclient.h>
#include <tcp.h>
#include <taskmon.h>
```

```

#include <multihome.h>
#include <netinterface.h>

// Check for Multihome options and display compiler warnings if not enabled
#ifndef MULTIHOME
#error This example requires that MULTIHOME be uncommented
#error in the header file nburn\include\predef.h, and that the
#error system files be rebuilt.
#endif

// App name for IPSetup
const char * AppName = "Multihome Example";

extern "C"
{
    void UserMain( void *pd );
    void WebDisplayIpSettings( int sock, PCSTR url );
}

// Global variables
InterfaceBlock *DhcpIb, *StaticIb;

// External function
void ShowIPOnFd( int fd, IPADDR ia );

/*-----
   Display IP setting on web page
   -----*/
void WebDisplayIpSettings( int sock, PCSTR url )
{
    // Show header message indicating source and destination
    writestring( sock, "Received request from " );
    ShowIPOnFd( sock, GetSocketRemoteAddr( sock ) );
    writestring( sock, " on IP address: " );
    ShowIPOnFd( sock, GetSocketLocalAddr( sock ) );
    writestring( sock, "\r\n<br><br>" );

    // Show both IP address for multihome
    writestring( sock, "Valid IP Address for this device:<br>\r\n" );
    ShowIPOnFd( sock, DhcpIb->netIP );
    writestring( sock, "<br>\r\n" );
    ShowIPOnFd( sock, StaticIb->netIP );
    writestring( sock, "<br>\r\n" );
}

/*-----
   UserMain
   -----*/
void UserMain( void *pd )
{
    InitializeStack(); // Init TCP/IP Stack

    /* Get a DHCP address if the stored IP Address in flash memory is
       set to 0.0.0.0 (set via IPSetup or serial interface).
       You may want to add a check for the return value from this function
       See the function definition in \nburn\include\dhcpclient.h
    */
    GetDHCPAddressIfNecessary();

    OSChangePrio( MAIN_PRIO ); // Change priority
}

```

```
EnableAutoUpdate();      // Enable the ability to update code over the network
StartHTTP();             // Start the web server
EnableTaskMonitor();     // Enable the Task scan utility

// Add the multihome interface at fixed ip address
AddInterface( AsciiToIp( "10.1.1.240" ), AsciiToIp( "255.255.255.0" ), 0 );

int DhcpInterface = GetFirstInterface(); // Get first interface identifier
DhcpIb = GetInterFaceBlock( DhcpInterface ); // Get interface data
iprintf( "DHCP IP Address: " ); ShowIP( DhcpIb->netIP ); iprintf( "\r\n" );

int StaticInterface = GetnextInterface( DhcpInterface ); // Get next interface
                                                           identifier
StaticIb = GetInterFaceBlock( StaticInterface ); // Get interface data
iprintf( "Static IP Address: " ); ShowIP( StaticIb->netIP ); iprintf( "\r\n" );

while ( 1 )
{
    OSTimeDly( TICKS_PER_SECOND * 5 );
}
}
```

## 17 Using the ColdFire Processor On-Chip SRAM on the NetBurner Platform

### 17.1 Introduction

In addition to the SDRAM on NetBurner modules, the ColdFire processor on your NetBurner device may have on-chip SRAM available for your application to use. For example, the 5272 has 4k, the 5282 has 64k and the 5270 has 64k bytes SRAM. The primary reason to use the on-chip SRAM is that it has single-cycle access time.

**IMPORTANT: The NetBurner system uses the first 400 bytes of the SRAM for the application vector table. Your application must not write to that space.**

Since the SRAM is used by the NetBurner system, it is already initialized and ready to use.

### 17.2 How to Use The SRAM in Your Application

To use the SRAM in your application, you need a mechanism to locate your variables in the SRAM memory map space, below the 0x400 bytes used by the vector table. There are two methods to accomplish this task:

1. Modify the `\nburn\<platform>\lib\sys.ld` file to add a SRAM tag. This is how the sim structure is implemented in the `\nburn\<platform>\system\simXXXX.h` header file, where `<platform>` is your NetBurner platform name (e.g. MOD5282), and XXXX is the ColdFire processor number (e.g. sim5282.h). The downside of this method is that you will need to modify the `sys.ld` file any time you install a new tools revision, since the tool installation will overwrite `sys.ld`.
2. You can create a pointer to a structure and access your variables with a simple dereference.

The process is similar no matter which option you choose:

1. Open the NetBurner platform help document located at `\nburn\docs\platform\<platform>.chm`, where the last `<platform>` is your NetBurner platform type. For example: `. \nburn\docs\platform\MOD5282.chm`. Find the memory map section under Hardware Documentation, and make note of the SRAM location. At the time this document was written, the SRAM memory map location for the Mod5282 was: 0x02000000 to 0x027FFFFFFF. Be certain to verify the address for your application.
2. Determine the start of usable SRAM space – remember, the first 0x400 bytes are used for vectors. In the above example, the starting SRAM address would be 0x02000000 + 0x400.
3. All variables must be accessed through a structure. You can create a structure like the following:

```
typedef struct
{
    int i;
    long l;
    char str[100];
} sram_struct __attribute__((packed));
```

The next step depends on which method you choose to locate the structure in SRAM: `sys.ld` or the pointer to a structure method.

### 17.3 OPTION 1: MODIFYING THE SYS.LD LINKER SCRIPT



The linker script is located at: `\nburn\<<platform>\system\sys.ld`. An example script for the Mod5282 is shown below (Note: the `sram_base` may be included in future tools releases, so verify it is not there before adding a new one):

```
vector_base = 0x20000000;
sim = 0x40000000;
flash_mirror = 0x44000000;
gConfigRec = 0xffc04000;
UserParamBase = 0xffc06000;
_RESET_ADDR = 0xffc00008;
```

You can add the `sram_base` to this script as follows:

```
vector_base = 0x20000000;
sim = 0x40000000;
flash_mirror = 0x44000000;
gConfigRec = 0xffc04000;
UserParamBase = 0xffc06000;
_RESET_ADDR = 0xffc00008;
sram_base = 0x0x20000400;
```

You may notice that the `sram_base` is 0x400 larger than the `vector_base` value.

In your application, you declare the structure as shown in the previous section and add an extern directive:

```
typedef struct
{
int i;
long l;
char str[100];
} sram_struct __attribute__(( packed ));

extern sram_struct sram;
```

Now you can access the variables with the following syntax:

```
sram.i = 1
strcpy(sram.str, "Hello World");
```

It is the Programmer's responsibility to ensure the structure fits within the available physical SRAM space.

## 17.4 OPTION 2: CREATING A POINTER TO A STRUCTURE

In your application, you declare the structure as shown in the previous section, then declare a pointer to the SRAM base address plus 0x400.

```
/*-----
SRAM Pointer Example
-----*/
#include "predef.h"
#include <stdio.h>
#include <ctype.h>
#include <startnet.h>
#include <autoupdate.h>
#include <dhcpcclient.h>
#include <string.h>
```

```

// Instruct the C++ compiler not to mangle the function name
extern "C"
{
    void UserMain( void * pd);
}

// Name for development tools to identify this application
const char * AppName="SRAMPointer";

#define SRAM_BASE (0x20000400) // SDRAM Base Address

typedef struct
{
    int i          __attribute__ ((packed));
    long l        __attribute__ ((packed));
    char str[100] __attribute__ ((packed));
} sram_struct ;

sram_struct *pSram = (sram_struct *)SRAM_BASE; // Set pointer address

// Main task
void UserMain( void * pd)
{
    InitializeStack();
    if (EthernetIP==0)GetDHCPAddress();
    OSChangePrio( MAIN_PRIO );
    EnableAutoUpdate();

    iprintf( "Application started\r\n" );

    // It is the Programmer's responsibility to ensure the structure fits
    // within the available physical SRAM space.    pSram->i = 1234;
    strcpy(pSram->str, "Hello World");

    iprintf("pSram->str: %s\r\n", pSram->str);
    iprintf("pSram->i: %d\r\n", pSram->i);

    while ( 1 )
    {
        OSTimeDly( TICKS_PER_SECOND );
    }
}

```

## 18 Time Functions

Embedded systems have a number of options to set and access time. Your NetBurner kit will enable you to set the time manually, through a real-time clock (if available), and using a network connection and the Network Time Protocol (NTP).

### 18.1 Standard C Time Functions

The following standard C time structures and functions are supported by the development tools and libraries. To use these functions you will need to include both `time.h` and `nbtime.h` in your application.

The `tm` structure is used to store time and date information:

```
typedef struct tm {
    int tm_hour;    // hour (0 - 23)
    int tm_isdst;  // daylight saving time enabled/disabled
    int tm_mday;   // day of month (1 - 31)
    int tm_min;    // minutes (0 - 59)
    int tm_mon;    // month (0 - 11 : 0 = January)
    int tm_sec;    // seconds (0 - 59)
    int tm_wday;   // Day of week (0 - 6 : 0 = Sunday)
    int tm_yday;   // Day of year (0 - 365)
    int tm_year;   // Year less 1900
}
```

The `time_t` variable type is a DWORD value.

The time functions in `nbtime.h` are:

```
time_t time( time_t *time )    Get current calendar time as single number of type time_t
set_time( time_t time )       Sets the system time to values in time_t structure
```

The functions in `time.h` are:

```
char *asctime( const struct tm *time )    Convert tm structure to string
```

```
ctime()      Convert time_t value to string
difftime()   Return difference between two times
gmtime()     Convert time_t value to tm structure as UTC time
localtime()  Convert time_t value to tm structure as local time
mktime()     Convert tm structure to time_t value
strftime()   Flexible calendar time formatter
```

## 19 The Template Program – Command Line Mode

You have two options for code development using the NetBurner Tools. The first is the IDE discussed earlier. The second is using the make utility from a command prompt. Typical reasons for choosing the command prompt mode are that some developers simply prefer this method, or you may have a favorite editor/IDE that you prefer over the NetBurner IDE. Most editors can invoke an external compiler to build the project.

This section will detail how to write, compile, and download a program using the command line tools. The details of the make utility “makefile” will also be covered. Traditionally called the “Hello World” program, our “Template Program” will specify a minimal code base from which you can write your future applications. The objective of this template program is to print the characters “Hello World” out the debug port of your NetBurner device. In addition, this template program will enable network services so that it can be downloaded over a network connection instead of through a serial port or a BDM (Background Debug Mode) port.

### The Debug Monitor

The NetBurner device contains a flash memory boot sector loaded with a boot program called the “Debug Monitor”. This program is designed to be very small and takes up less than 16 Kbytes of memory space. **Note:** The Debug Monitor is not designed to provide full TCP network communications, although it does support the TFTP protocol.

The full TCP/IP Stack functionality is compiled as part of your application. If you download an application that immediately crashes when it boots, full network services will not be available. In this case, the NetBurner Debug Monitor comes to the rescue. Once in the Debug Monitor (at the NB> prompt), you can download a working application through the serial debug port. See the section on serial downloads using the Debug Monitor for more information.

Before starting to write your application, you must create a project directory. You

project directory can be located anywhere on your hard drive. For this example:

1. Create a directory with a path of c:\netburner
2. Create a subdirectory with the path of c:\netburner\template

Now, let's look at the template program. First, you will need to create a file (using your editor of choice) called "main.cpp" in the c:\netburner\template directory. Simply copy and paste the code below (in section 5.1), and save this file (as main.cpp) in the c:\netburner\template directory.

### Using C++ File Extensions

Throughout this manual, we will always use the .cpp extension to indicate the source files are C++. This is done to take advantage of the benefits of the C++ compiler as well as support those programmers using C++. **Note:** You do not need to know any C++ to use the NetBurner Development Kit, and the majority of examples in this guide do not use C++.

## 19.1 Template Program Source Code

```

1  /*-----
2  Description: The Template Program
3  Filename: main.cpp
4  -----*/
5  #include "predef.h"
6  #include <stdio.h>
7  #include <startnet.h>
8  #include <autoupdate.h>
9
10 extern "C" {
11 void UserMain(void * pd);
12 }
13
14 void UserMain(void * pd)
15 {
16     InitializeStack();
17     EnableAutoupdate();
18     OSChangePrio(MAIN_Prio);
19
20     while (1)
21     {
22         iprintf("Hello World\n");
23         OSTimeDly(TICKS_PER_SECOND * 1);
24     }
25 }

```

The above program is a fully functional network application in just a few lines of code! The only application specific code is on lines 20 and 21; the remainder of the program is what we will refer to as the “Template Program”. Although the purpose of our application is to print “Hello World” out the debug serial port, adding the network support will allow fast code development using the NetBurner “make load” build command, and also allow network configuration using the NetBurner IPSetup utility (i.e. IPSetup tool). For additional information on “make load” and AutoUpdate, please refer to your NNDK User Manual. From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.

Lines 5 – 9 specify the include files:

- predef.h defines constants for debugging (covered in the Debugging chapter) and version info
- stdio.h defines standard input and output functions
- startnet.h defines the function calls necessary to start the TCP/IP Stack and HTTP
- autoupdate.h defines the functions necessary to download firmware updates over a network connection

Line 10 tells the C++ compiler to declare the UserMain() function as a “C” type function call. **Note:** This is done to allow straight C programming as opposed to C++.

Line 14 declares the UserMain() function. The parameter passed to UserMain() is a void pointer to some type of data. This is a feature of the uC/OS RTOS. **Note:** This example does not use the passed parameter.

Line 16 initializes the TCP/IP stack.

Line 17 enables the code development AutoUpdate feature using “make load”

Line 18 sets the task priority to the defined value of MAIN\_Prio, which defaults to 50. More information on the RTOS will be covered in the RTOS section of your NNDK User Manual. (From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.)

Lines 20 - 24 create an infinite loop that prints the message “Hello World” to stdout (which defaults to the debug port of your NetBurner device) once per second.

Line 21 is a while loop that loops forever. **Note:** Your application should never return from UserMain( ); that would mean your application has lost control of the system.

## 19.2 Compiling and Running the Application - Overview

Now that we have the application source code file, we need to compile it into a code image and download it to your NetBurner device. There are four methods to download your applications:

1. Through the serial port
2. Through a network connection using AutoUpdate (preferred method)
3. Through a network connection using TFTP
4. Through a network connection using FTP

In this example, we will use the AutoUpdate method. In order to run your application on your NetBurner device you will need to do the following:

1. Create a “makefile”, which is used to compile and link your source code
2. Download your code to your NetBurner device
3. Burn this code into the Flash memory
4. Reboot your NetBurner device

Thankfully, this is a very simple process that can be accomplished with a single build command. The first step is to create a makefile, which is used to tell the compiler how to compile the source code. Once we create the first makefile, it can be used as a template for your future projects. For additional information, please refer to your User Manual. From Windows: Start → Programs → Netburner NNDK → NNDK Users Manual.

## 19.3 Creating a makefile

Below is the makefile for the template example application. The file name is “makefile” with no extension. Simply copy and paste the code below (using your editor of choice), and save this file (as makefile) in the c:\netburner\template directory. **Note:** The makefile should always be located in the same directory as your application source code. The makefile below will work for applications with or without HTML support as described in the comments. **Note:** A comment in C++ is signified by the ‘#’ character at the beginning of a line.

```

1  #Build NAME.x and save it as $(NBROOT)/bin/NAME.x
2  NAME =  template
3  CXXSRCS := main.cpp
4
5  #Uncomment and modify these lines if you have C or S files.
6  #CSRCS := foo.c
7  #ASRCS := foo.s
8  #CREATEDTARGS := htmldata.cpp
9
10 #Include the file that does all of the automagic work!
11 include $(NBROOT)/make/main.mak
12
13 #htmldata.cpp : $(wildcard html/*.*)
14 #comphtml html -ohtmldata.cpp

```

Once you have created a single makefile, you can copy it to the project directories of any applications you create in the future. **Note:** If your application does not use HTML, the only lines you will need to change will be the name of the application (line 2) and the list of source code files (line 3). If your application uses the Web Server and HTML, simply uncomment lines 8, 13 and 14 - you do not need to modify these lines.

Line 2 specifies the name of the application image file that will be built. Ours is called “template”. **Note:** there is not a semicolon after the ‘=’ here.

Line 3 specifies the C++ source code files that need to be compiled. We only have one file in this example. If your project has more than one source code file, you would just add them to this line separated by spaces.

Lines 6 and 7 specify C and S (assembly language) source files.

Line 8 is used for applications that use HTML and the web server. You do not need to change the file name.

Line 11 calls additional make files that are part of your NetBurner tool set.

Lines 13 and 14 are used to process code used by the Web Server such as HTML. **Note:** Do not uncomment these lines unless you have a directory named “html” under your project directory.

## 19.4 Compiling the Application


At this point you should have a directory called `c:\netburner\template` that contains two files: “main.cpp” and “makefile”. First, we will run “make” to verify the application compiles correctly. Once all errors have been corrected, we will download this application to your NetBurner device. To compile the source code and create the application image:

1. If you have not done so already, open a command prompt and move to the `c:\netburner\template` directory (`cd c:\netburner\template`). If you did not select the automatic variable configuration during the installation process, you must run `c:\netburn\setenv.bat` manually. A simple method to determine if your system is configured correctly is to type “set” at the command prompt (then press the "Enter" key). Look for an environment variable called “NBROOT”. If NBROOT is defined, then you should be ready to go. If NBROOT is not defined, just type "setenv" at the command prompt (in the `c:\netburn` directory) and press the "Enter" key. Now, if you type “set” at the command prompt (and press the "Enter" key), you will see that NBROOT is defined (i.e. `NBROOT=/netburn`).
2. At the command prompt (in the `c:\netburner\template` directory), type “make” and press the "Enter" key. This will invoke the compiler to compile and link your code, and build the code image. If you have any coding or syntax errors, correct them now and continue to run make until your code compiles correctly.

When your code compiles correctly, two files are created: `template.s19` and `template_APP.s19`. The `template.s19` file is memory mapped to run from RAM, while `template_APP.s19` is memory mapped to run from Flash memory. **Note:** All compiled images will be located in the `c:\netburn\bin` directory. This guide will focus on Flash downloads. Please refer to the section on Downloading to RAM in your User Manual for more information on downloading applications to RAM. (From Windows: Start → Programs → NetBurner NNDK → NNDK Users Manual.)

## 19.5 Template Program Setup

Before running our program, let's make sure your hardware is set up correctly. To run the Template program, you will need your hardware to be set up as shown below:

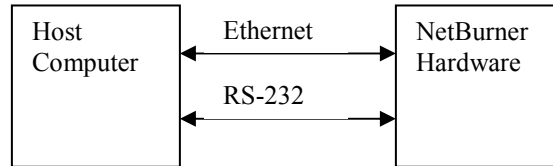

The Ethernet connection should be between your host computer and your NetBurner device's RJ-45 connector. The RS-232 connection should be made between your host computer's Serial port and the Debug Serial port of your NetBurner device. The Serial port connection on the NetBurner device will vary with each hardware platform, but it should be a DB9 connector on the processor board itself, or on a separate Adapter board or Carrier board supplied with your kit. Please refer to your Quick Start Guide for additional details on how to "make" and download files to your NetBurner device.

### 19.5.1 Testing the RS-232 Debug Connection

You can determine if you are properly connected to the debug port with the following test:

1. Start the dumb terminal program MTTY, which is included in your NetBurner tools. (From Windows: Start → Programs → NetBurner NNDK → MTTY Serial Terminal. From the command line type: C:\Nburn\pcbin\mtty and then press the "Enter" key.) Set the baud rate to 115,200 and make sure to click on the "Connect" button in the MTTY window.
2. Power on or reset your NetBurner device. The MTTY screen should display a sign-on message similar to "Waiting to boot.....". If you see this message, then you are connected correctly.

For additional information, please refer to your User Manual. From Windows: Start → Programs → NetBurner NNDK → NNDK Users Manual.



## 20 Software Licensing

The Software included in this development kit is licensed to run only on NetBurner provided hardware. If your application involves manufacturing your own hardware, please contact NetBurner Sales for details on a royalty-free software license. The following sections describe the agreements presented during installation of the development kit.

### 20.1 NetBurner License Agreement

**Notice to Developer:** This is a contract. By installing the NetBurner Tools you accept all the terms and conditions of the “NetBurner Tools Software” and “NetBurner Embedded Software” Agreements. If you do not agree with the terms and conditions of these agreements, return this development kit and all components to NetBurner.

1. All embedded software and source code provided in this Network development kit is subject to one of four possible licenses:
  - The NetBurner Tools License (most restrictive)
  - The NetBurner Embedded Software License
  - The GNU Public License
  - The Newlib License (least restrictive)
2. The GNU development executables provided in the nburn\GCC-M68k directory branch are subject to the GNU public license. This license can be found in nburn\docs\GNULicense.txt file.
3. The runtime libraries and include files provided in the nburn\GCC-M68k directory branch are subject to the Newlib license. This license can be found in nburn\docs\NetlibLicense.txt file.
4. The compcode application provided in the nburn\pctools\compcode directory is subject to the GNU public license. This license can be found in the nburn\docs\GNULicense.txt file.
5. The other programs in the \nburn\pctools directory are subject to the NetBurner Tools License provided below.
6. All other provided source code and libraries are subject to the NetBurner Embedded Software License provided below.

### 20.2 The NetBurner Tools Software License

Copyright © 1998 - 2004 NetBurner, Inc., All Rights Reserved.

Permission is hereby granted to purchasers of the NetBurner Network Development Kit to use these programs on one computer, and only to support the development of embedded applications that will run on **NetBurner provided hardware**. No other rights to use this program or its derivatives, in part or in whole, are granted. It may be possible to license this or other NetBurner software for use on non-NetBurner hardware. Please contact [sales@netburner.com](mailto:sales@netburner.com) for more information.

NetBurner makes no representation or warranties with respect to the performance of this computer program, and specifically disclaims any responsibility for any damages, special or consequential, connected with the use of this program.

### 20.3 The NetBurner Embedded Software License

Copyright © 1998 - 2004 NetBurner, All Rights Reserved

Permission is hereby granted to purchasers of NetBurner hardware to use or modify this computer program for any use as long as the resultant program is **only executed on NetBurner provided hardware**. No other rights to use this program or its derivatives, in part or in whole, are granted. It may be possible to license this or other NetBurner software for use on non-NetBurner hardware. Please contact [sales@netburner.com](mailto:sales@netburner.com) for more information.

NetBurner makes no representation or warranties with respect to the performance of this computer program, and specifically disclaims any responsibility for any damages, special or consequential, connected with the use of this program.

## 21 NetBurner Contact Information

### Mailing Address:

NetBurner, Inc.  
5405 Morehouse Drive  
Suite 350  
San Diego, CA 92121  
858.558.0293 phone  
858.558.8549 fax

### E-Mail:

[sales@netburner.com](mailto:sales@netburner.com)  
[support@netburner.com](mailto:support@netburner.com)

### Main Web Site:

<http://www.netburner.com>

### Support and Product Registration Web Site:

<http://support.netburner.com>

## 22 NetBurner Support Information

Each NetBurner Network Development kit includes 90 days of email support. To access support resources and to register your product, please go to <http://support.netburner.com>, or you can send an E-Mail to [support@netburner.com](mailto:support@netburner.com). **Note:** You must register your product before you can request support. You will need to include the software release number (on your NetBurner Tools CD), the hardware Ethernet address and the hardware revision number of your NetBurner board. The NetBurner web site is a good source for answers to frequently asked questions and design examples. Annual support and software maintenance agreements can also be purchased on the NetBurner web site at <http://www.netburner.com>.