

November 1983

Report No. STAN-CS-83-985

Stanford Department of Computer Science

(Version 1)

First Grade T_EX
A Beginner's T_EX Manual

by
Arthur L. Samuel



This manual is based on the publications of Donald E. Knuth who originated the T_EX system and on the recent work of Professor Knuth and his many students and collaborators who have helped bring the T_EX82 system to its present advanced state of development. The T_EX logo that is used in this manual is a trademark of The American Mathematical Society. The preparation of this report was supported in part by National Science Foundation grant IST-820/926 and by the System Development Foundation.

A Beginner's Preface

The beginner can easily be confused by the different versions of \TeX 82 that seem to exist on different computers and by the conflicting claims for different *Macro Packages* that are supposed to making \TeX 'user friendly'. This preface attempts to clarify the situation.

In the first place, there is only one official version of \TeX 82 and users are specifically cautioned not to make any changes to the basic program itself. A '*change file*' mechanism is provided to allow the program to be compiled differently as dictated by the hardware and system software constraints that exist at any particular computer installation, but these changes should not modify \TeX 's formatting capabilities.

It is customary, and indeed desirable, to supply \TeX with a fairly large amount of additional information, either in the form of a separate input file or as information that is preloaded with \TeX so that it becomes available automatically when the \TeX program is used. Such files are usually called *macro packages* and you, as a user, may have to concern yourself with the number and kinds of *macro packages* that are available at your installation.

Macro packages are used to supply \TeX with several quite different kinds of information, much of it being fairly standard and of no immediate concern. *Macro packages* often assign values to a fair number of the approximately eighty \TeX *primitives* that can be so preassigned and you may wish to assign different values to these. Of major concern are the fairly large number of *control sequences* that are predefined. These *control sequences* attach names to certain logical combinations of selected *primitives* (and of other *control sequences*) that together perform frequently-used formatting functions. The availability of these predefined sequences can make your task very much easier when you wish to do the specific things for which they were designed.

This manual is written on the assumption that you will be using the `PLAIN.TEX` *macro package*. This package simplifies many formatting tasks without interfering with the separate use of any of \TeX 's *primitives*. Having mastered plain \TeX to the extent that it is explained in this manual, you may later want to define some additional *control sequences* that will help you in specifying the formatting conventions that you employ.

Some *macro packages* are written from quite a different point of view from that used for plain \TeX , where the aim is to make certain global formatting conventions very easy to use at the expense (and sometimes with the deliberate intent) of making it more difficult for other formatting conventions to be specified. Some of these packages actually redefine terms that \TeX uses for *primitives* so that these *primitives* can no longer be called directly. If one of these packages completely meets your needs then you should use it, but beware.

One final word—there is a certain amount of circularity in the language used in this manual. If you do not understand everything the first time through, plow straight ahead until you bog down and then start all over again at the beginning. You will be surprised how much clearer everything will be on the second reading.

First Grade T_EX
A Beginner's T_EX Manual

by
Arthur L. Samuel

This manual is based on the publications of Donald E. Knuth who originated the T_EX system and on the recent work of Professor Knuth and his many students and collaborators who have helped bring the T_EX82 system to its present advanced state of development. The T_EX logo that is used in this manual is a trademark of The American Mathematical Society. (The preparation of this report was supported in part by National Science Foundation grant IST-820/926 and by the System Development Foundation. As evidenced by the title page, this manual was originally prepared as Report No. STAN-CS-83-985, Stanford University, Department of Computer Science.)

Table of Contents

Introduction	1
Toward Book Quality	2
Special Symbols	3
Issuing Commands to $\text{T}_{\text{E}}\text{X}$	3
Fonts	4
Dimensions and Keywords	5
To Use $\text{T}_{\text{E}}\text{X}$	5
Boxing with Glue	6
An Example	7
Understanding Error Messages	10
The Six Modes	11
Making Tables	12
The ' $\backslash\text{halign}$ ' Alignment Method	12
The Fixed-Column-Width ' $\backslash\text{settabs}$ ' Method	16
The Variable-Column-Width ' $\backslash\text{settabs}$ ' Method	17
Typing Mathematical Formulas	17
Some Odds and Ends	26
Output Routines	28
Defining Macros	28
Appendix	30

Acknowledgements

It is impractical to mention all of the people who have proofread this manual and who have contributed many valuable suggestions. The detailed contributions made by Don Knuth, Mrs. Knuth, Dave Fuchs, Arthur Keller, Ron Bracewell, and Howard Trickey were particularly helpful. Needless to say, much of the basic material in this manual came directly or indirectly from The $\text{T}_{\text{E}}\text{X}$ book by Don Knuth.

First Grade T_EX

A Beginner's T_EX Manual

Introduction

This is an introductory ready-reference T_EX82 manual for the beginner who would like to do First Grade T_EX work. Only the most basic features of the T_EX system are discussed in detail. Other features are summarized in an appendix and references are given to the more complete documentation available elsewhere.

T_EX is a computerized typesetting system. As T_EX is normally used, the original text is typed (into an input file) very much as it would be typed for submission to an old-fashioned printer except that this input file must now contain all of the instructions that are needed to describe the desired format for the printed output. Given such a description, still in rather general terms, the T_EX compiler is able to specify in precise detail the font (i.e., the size and kind of typeface) and the location for each character that is to be printed. Your final output can meet the very best publishing standards.

Defining book quality text is not an easy task. While the T_EX system takes care of many of the tedious details, the wealth of facilities that T_EX provides can be very confusing to the beginner and sometimes even to the experienced user. These facilities include the handling of such matters as: 1) ligature replacements (for example, fi for fi), 2) kerning (different spacings between certain letter pairs), 3) automatic hyphenation, 4) line justification, 5) centering, 6) flushing right or left, 7) tabular aligning, 8) the formatting of complicated mathematical expressions, 9) section and page numbering, 10) the introduction of running heads, 11) the numbering and placing of footnotes, and 12) the preparation of a table of contents and an index, to name but a few.

It will be assumed that the reader is already acquainted with the use of a computer and with at least one text editor that can be used while typing the T_EX input file. One minor warning at this point: Do not use an editor that requires or leaves its own special formatting marks (line numbers, word processing commands, etc.) in the file that it produces, unless your version of T_EX has been specially tailored to tolerate them. Such marks will be assumed to be a part of the text by T_EX. The text in the input file should be broken up into reasonably short lines. T_EX will ignore 1) the way you break your paragraphs into lines, 2) extra spaces between words, and 3) extra blank lines between paragraphs, although it does accept one or more blank lines as indicating a paragraph break.

T_EX is usually preloaded with one or more special files that define many very useful commands. This manual assumes that you will be using a basic file called `PLAIN.TEX`, and T_EX when so loaded will be referred to as *plain T_EX*. We will not discuss the details as to how one actually types the input information, how this is saved as a file on the system, how one evokes the T_EX compiler, and how one instructs the computer system to print the final document, as these features are highly system dependent.

Toward Book Quality

Book quality text differs from ordinary typing in a number of simple but far from trivial ways. In the first place, a distinction is made between the upper case O and the number 0 and between the lower case l and the number 1, then there is a distinction between hyphens, dashes, and the minus sign. Also, your terminal should contain two varieties of ‘single’ quotes and when you want a “double” quote you simply type two of the appropriate single quotes and T_EX will space these correctly, as shown below.

Name	Hyphen	En-dash	Em-dash	Minus sign	Double quotes
To print	-	-	—	-	“text”
You type	-	--	---	\$-\$	‘ ‘text’ ’

A word about hyphenation—T_EX can usually be depended upon to use hyphens correctly (when this is necessary to achieve right justification) and to avoid excessive hyphenation (by increasing or slightly decreasing the inter-word spacings within pre-assigned limits). There are exceptions, and there are words like *pres-ent* and *pre-sent* where the positioning of a hyphen depends upon how the word is used. When T_EX either refuses to hyphenate or makes a mistake, you can gain hyphenation control over the word in question by inserting one or more *discretionary hyphens* at acceptable locations, using the *control sequence* ‘\’, as an example in the word *re\ -cord* or *rec\ -ord*. These will be ignored when not needed and they will print as normal hyphens when needed.

T_EX provides for the automatic substitution of ligatures when available, replacing ff by ff, fi by fi, and fl by fl, unless you specifically disallow it by typing either `{f{}f}` to get ff or `f{/f}` to get ff (slightly more space between).

A nice feature of plain T_EX, is the ease with which special accents and a few special letters may be produced.

Name	grave	acute	“hat”	umlaut	tilde	“bar”	dot
To print	à	é	ô	ü	ñ	ȳ	ṑ
You type	\`a	\`e	\`o	\"u	\~n	\=y	\.p
Name	check	breve	long	tie-after	cedilla	bar-under	dot-under
To print	š	ı̇	ĵ	ı̄u	ç	ḱ	ḥ
You type	\v s	\u\i	\H\j	\t\i u	\c c	\b k	\d h
To print	œ,Œ	æ,Æ	å,Å	ø,Ø	ı,İ	ı̇ ı̈	ß
You type	\oe, \OE	\ae, \AE	\aa, \AA	\o, \O	\l, \L	? ‘ ! ‘	\ss

Note that `\i` and `\j` give dotless i and j for use with accents. All of the above special symbols and characters work equally well in roman, italic, and bold type fonts. A few do not work in the fixed-width typewriter font. Many other symbols, mainly mathematical, are listed in the Appendix.

Special Symbols

Plain T_EX assigns special meanings to ten infrequently used but normally available typewriter symbols. These symbols are used to simplify the task of issuing commands to T_EX. Should you wish these symbols to be printed in your final document they must appear in your input file as shown below.

Symbol	To print, type	Special T _E X meaning when used directly
\	<code>\backslash\$</code>	Used to indicate the start of a T _E X <i>control sequence</i> , usually referred to as a <i>backslash</i>
{ and }	<code> \${ \$ and \$ } \$</code>	Grouping symbols, to indicate range of action of a <i>control sequence</i> to the enclosed text
\$	<code>\\$</code>	Used to initiate and terminate portion of the text that is to be in Mathematics Mode
&	<code>\&</code>	Alignment tab, used to delineate fields within a table
#	<code>\#</code>	Parameter, used to signify a field within a table or in a <i>control sequence</i>
~	<code>\~{ }</code>	Superscript (also used as an accent, see previous page)
-	<code>\- </code>	Subscript
%	<code>\%</code>	Comment symbol, the rest of the line is ignored by T _E X
~	<code>\~{ }</code>	Used to introduce a single space in locations where a line break is not to be allowed.

Issuing Commands to T_EX

Commands to T_EX, as distinguished from the text itself, consist of the *backslash*, '\', then the name of the command (without an intervening space) and then, in some cases, the parameters that are associated with the command. The command name can be of two types, either 1) a single non-alphabetic character, or 2) one or more alphabetic characters that must be terminated by a space if the name is to be followed by other alphabetic characters. These alphabetic characters are often in lower case, but please note that the correct case, as specified, must always be used. For example, '`\Omega`' produces 'Ω', while '`\omega`' produces 'ω'. Also note the basic distinction between non-alphabetic-character command names which are not to be followed by a space (unless a space is actually wanted in the output) and alphabetic-character command names which require a terminating space if they are followed by other alphabetic characters.

Commands are of two types. Over 300 commands, called *primitives*, are a part of T_EX's built-in vocabulary. Then there are *control sequences*, sometimes called *macros*, that are constructed from these *primitives* (or from other *control sequences*).

Many of the *primitives* are normally used only to define *control sequences* and need not concern the beginner, but others specify basic characteristics of T_EX's output, such as,

for example, the page size (`\hsize=6.5in \vsize=8.9in`), the desired margins, and the spacing between paragraphs (`\parskip=10pt plus 1pt`). All of these latter are preassigned values in plain T_EX although they can be changed by the user.

Control sequences are used to simplify the typing of commands to T_EX, since they are shorter and much easier to remember than the sequence of *primitives* that they specify. Many very useful *control sequences* are to be found in the file PLAIN.TEX and these *control sequences* are, in effect, added to the basic vocabulary that T_EX understands when this file is preloaded with T_EX. In addition, there exist a number of special collections of *macros* that T_EX experts have found useful for special purposes such as writing business letters, preparing internal memoranda, and preparing manuscripts for publication. The very first line appearing in your main input file may well be the control sequence `\input` followed by the name of the file that contains the desired macro collection. Incidentally, T_EX interprets a file name that is so used without a file name extension to mean a file with the extension of .TEX, for example, `\input MYMACS` will cause the file MYMACS.TEX to be loaded.

Plain T_EX understands well over 900 *control sequences* but many of these are self-evident from their names and others fall into a relatively few categories, so that they can be easily learned when needed. Some of the more important of these are listed in the Appendix.

Fonts

T_EX provides for the use of as many as 256 different fonts, each containing as many as 256 different characters. Plain T_EX, as loaded, has 16 fonts that are assigned special control-sequence names. The default font, called roman, is requested by the use of the *control sequence* `\rm`. If you wished the entire text to be typed in boldface you would type `\bf` before your text. If, on the other hand, you want a single word or a phrase to appear in a different font you should use the grouping symbols '{' and '}' to delimit the range.

For example, typing `'to be {\bf bold} is to {\sl emphasize} something'` will produce `'to be bold is to emphasize something'`. Incidentally, an *italic correction* command `\/` introduces a little extra space when used after letters in the the `\it` and `\sl` fonts to compensate for a change in slope of the letters. Typing `'{\it italicized\/} text'` produces `'italicized text'` as compared to `'italicized text'` when the correction is not used.

The following *control sequences* are for the type fonts as shown:

<code>\rm</code>	<code>\sl</code>	<code>\it</code>	<code>\tt</code>	<code>\bf</code>
Roman	Slanted	Italic	Typewriter	Boldface

Type fonts also come in different sizes. To demonstrate, if you type:

```
{\tenrm smaller and} {\ninerm smaller and} {\eightrm smaller and}  
{\sevenrm smaller and} {\sixrm smaller}, you get
```

smaller and smaller and smaller and smaller and smaller, all lined up to a common baseline.

This manual uses *10 point* type, as called for by `PLAIN.TEX`, and defined to be `\tenrm`, except that the author has had everything magnified by 1.2 (for beginners), by having the command `'\magnification=1200'` appear ahead of any text in the input file. So the actual sizes, in the above example, are all multiplied by 1.2. You may have also noticed that this manual uses *'slanted type'* for emphasis and *'typewriter type'* for things that you are told to type and for the messages that the computer displays.

The characters within a font, including those not on your keyboard, can be gotten by typing `'\char<number>'` where `<number>` is the decimal number of the character position, or by typing `'\char'<octal number>'` where `<octal number>` is an octal number. For example, typing `'\char'35'` produces \AE . Incidentally, the normal alphanumeric characters are at their *ascii* positions regardless of the code that your computer may use externally.

Another way to get symbols that are not on your keyboard is to define *control sequences* for them. For example, `PLAIN.TEX` defines `'\ne'`, `'\le'`, and `'\ge'` for \neq , \leq and \geq , respectively. Over 300 such `PLAIN.TEX` definitions are listed in the Appendix.

Dimensions and Keywords

\TeX understands a variety of dimensional units as *keywords* that are used without the `'\'`. These convey fixed meanings to \TeX when they are used in the proper context. These units and their meanings are:

Unit	Meaning	Per inch	Unit	Meaning	Per inch
pt	point	72.27	mm	millimeter	25.4
pc	pica	6.023	dd	Didot point	67.54
in	inch	1	bp	big point	72
cm	centimeter	2.54	sp	scaled point	4736286.72

Sometimes it is convenient to use dimensions that are relative to the character sizes in the font being used at the time. Two such units are the `em` and the `ex`. The `em`, used for measuring horizontal distances, is, by tradition, the width of the upper case 'M' but is an arbitrarily assigned value in \TeX that is the width of a 'quad'. The `ex` is used for measuring vertical distances and is approximately the height of a lower case 'x'.

To Use \TeX

Having written a simple input file, say, `MYFILE.TEX`, which contains the desired text together with a few *control sequences* that define your wishes, you may now call on \TeX to operate on your file. On some computers you do this by typing: `'run tex;MYFILE'`. Since the correct form can vary from computer to computer, the best thing to do is to ask someone who knows what to do on your particular computer. Usually, \TeX will begin by prompting you with a double asterisk `'**'`, to indicate that you can then type the name of your input file. If, on the other hand, the prompt is a single asterisk `'*'`, (or if you are

calling for another file within a file) then you must precede the file name by the ‘\input’ command thus: ‘\input MYFILE’. The control sequence \input must usually be typed in lower case and typing ‘MYFILE’ implies ‘MYFILE.TEX’.

The input file itself may begin by referencing one or more additional files (this time using the ‘\input’ command). These files may define some special fonts that are to be used and they may contain the definitions of some specialized, frequently-used, constructs (*control sequences* or *macros*) that are used to simplify the typing of the desired instructions. Once defined, these constructs can then be called by name as needed in the text file itself. Caution: Do not load up your working space with macros that you never use.

The T_EX program produces a DVI (device independent) file, that specifies each character that is to be printed, together with its font and its exact location in the printed document. The DVI file may require some further translation before it is acceptable as input to the available printer but on most systems this further action is usually automatic, requiring, at most, a carriage return confirmation. The DVI file is usually saved and it can then be reprinted at a later date, perhaps on a different printer, if this should be desired.

It should be noted that T_EX does not need to know the exact shape of each character, but it does need to know the overall size and the details as to how the individual characters may interact with adjacent characters (resulting in ligature replacements or in kerning). This information is usually contained in what are known as TFM files. The printer, on the other hand, does need to have access to the detailed information as to the exact configuration of each character that is to be printed and this information is usually contained in what are known as PXL files. The two sets of files must agree as to the fonts that they describe, or chaos will result.

Boxing with Glue

There are a few facts about the inner working of T_EX that you will need to know. T_EX approaches the task of formatting a page of text much as a mason might build a brick wall, which is to be laid in courses to a fixed width using bricks that vary in size (and that have to be used in a fixed order), with limits as to the minimum and maximum amount of mortar that can be used between bricks.

T_EX happens to use different terms, which you should learn to recognize. Instead of *bricks*, T_EX talks about ‘*hboxes*’ (initially, the individual words in your text), which it assembles out of simple ‘*boxes*’ (the individual letters). No *mortar* is used between letters so words always look the same. There may be some ‘*kerning*’, e.g., there will be less space between an ‘o’ and an ‘x’, as in *box*, than there will be between two ‘o’s as in *book*. T_EX then puts these *hboxes* together to form larger *hboxes* (this time, a collection of words), using ‘*glue*’, in place of *mortar* for the inter-word and inter-sentence spacings. The *glue* has properties of being *stretchable* and, to a lesser extent, *shrinkable*. This list of *hboxes* and *glue* can then be expanded or compressed to meet the ‘*hsize*’ dimension that has been preset by PLAIN.TEX to 6.5 in, or that you have changed by typing \hsize 4.25in, for example.

Plain T_EX takes care of such details as putting slightly more space after commas and after periods and by allowing these globs of glue to stretch more and shrink less than that allowed for the normal glue between words. While this is desirable in most cases, there are times when it is not desired and then you should use the *backslash-space control sequence*, ‘\ ’, (that is a backslash followed by a space) to guarantee a normal space, or perhaps use the *tie symbol*, ‘~’, in place of the space after an abbreviation such as in ‘*Fig. 23*’ or *Mr. Smith*, where it is also desirable to prevent the sentence from being broken between the abbreviation and the following number or word.

Actually, T_EX treats an entire paragraph as a unit and tries to distribute the text into as many lines as are required with the individual lines meeting the *hsize* requirement without excessive stretching or shrinking. If this cannot be done, T_EX then tries to hyphenate. T_EX will usually find several ways that the paragraph can be broken, and it will then pick the way that it thinks is best. The paragraph will then be broken up into a sequence of *hboxes*, each of which should meet the specified line width.

T_EX will complain with an ‘overfull hbox’ message, if it is unable to meet the tolerances that have been specified. Your task then is to inspect the offending line or lines to see if there is some simple way to overcome the difficulty; perhaps a discretionary hyphen is needed. Lacking such a remedy, you can force a line break at an earlier place in the offending line or earlier in the paragraph, but this is seldom desirable. It is usually better simply to reconstruct the sentence or paragraph so as to avoid the trouble. Actually, there are a number of ways that you can anticipate trouble and provide for it in advance, as you will learn through experience.

An Example

Perhaps, it is time to stop and show you an example, and what better example than the title page of this manual itself, which was typed using plain T_EX. This example may seem a bit too complicated for a beginner but it does provide a convenient vehicle to illustrate a number of T_EX’s idiosyncrasies that you need to know about and that are hard to explain in abstract terms. So do go through it line by line with the explanation that follows.

My input file is divided into pages, although this is not required and some installations may not permit this nicety. T_EX, of course, ignores page breaks in the input, just as it ignores line breaks.

The first part of the input file defines some *control sequences* and contains:

```
\font\ninerm=cmr9 \font\eightrm=cmr8 \font\sixrm=cmr6 \font\csc=cmcsc
\font\seal=stan70 % For use to produce the Stanford seal.
\def\TeX{T\kern-.1667em\lower.5ex\hbox{E}\kern-.125em X}

\magnification=1200 % This magnifies everything by 1.2.
\parskip 10pt plus 1pt % This puts some empty space between paragraphs
\parindent 0pt % Paragraphs are not to be indented
```

The next part of the input file contains:

```
\nopagenumbers % The title page is not to be numbered.
\null\vskip-46pt % Put the first line 46 points higher than normal
\hbox to 6.5truein {November 1983 \hfil Report No. STAN-CS-83-985}
  % A convenient way to make a box of specific size.
\vskip .1in % Skip down 0.1 inch
\line {Stanford Department of Computer Science\hfil (Version 1)}
\vfill % This and similar commands later, will divide the space evenly.
\centerline{\bf First-Grade \TeX}
\vskip .1in
\centerline{\bf A Beginner's \TeX\ Manual}
\vskip .25in
\centerline{by}
\centerline{Arthur L. Samuel}
\vfill
\centerline{\seal S}
\vfill
```

This manual is based on the publications of Donald E. Knuth who originated the \TeX system and on the recent work of Professor Knuth and his many students and collaborators who have helped bring the \TeX 82 system to its present advanced state of development. The \TeX logo that is used in this manual is a trademark of The American Mathematical Society. The preparation of this report was supported in part by National Science Foundation grant IST-820/926 and by the System Development Foundation.

```
\eject\end % \eject, only, would be used if other pages were to follow.
```

So let us consider this example in detail.

We first note that the *control sequence* ' \font ' is used to assign names to several fonts that PLAIN.TEX had loaded but did not name. Actually, only one of these fonts was used on the cover page but it is good practice to start your input file by naming all of the other fonts that you intend to use beside those in plain \TeX 's standard set. Note that this same *control sequence* would have instructed \TeX to copy the font metrics (the dimensional information that \TeX actually needs) from the named file, if this *font* information had not been preloaded, as it had been by PLAIN.TEX.

Next comes a definition for the \TeX logo. You will probably not need to cause letters to be artificially displaced from their normal positions, but if you do, here is an example. It also serves as a model for other *control sequence* definitions that you may find occasion to use. The ' \magnification ' *control sequence* has already been explained (under **Fonts**).

The *control sequence* ' $\parskip=10pt$ plus $1pt$ ' is an example of a general class of *control sequences* that take dimensions. I could have written it as $\parskip10pt$ plus $1pt$ minus $1pt$ had I been willing for the space to be shrunk by as much as $1pt$ on some occasions and stretched on others. Incidentally, plain \TeX sets ' $\parindent=20pt$ ', but this has

been redefined for this manual by `\parindent Opt`. Note that the use of the '=' sign is optional but that a unit of measure must be specified even when the value is zero. So much for the first part.

After telling T_EX that the title page is not to be numbered, the information for the title page starts with the *control sequence* `\null`, which, as its name implies, normally does nothing. So why use it? One of T_EX's idiosyncrasies is that it gobbles up extra spaces that you leave between words, extra space between paragraphs, and any extra space that might be left over when it has just introduced a page break. So, without the `\null`, T_EX will assume that the negative space called for by the `\vskip-46pt` *control sequence* was left over from a previous page and simply gobble it up. The `\null` *control sequence* starts the new page by putting almost nothing (actually an *hbox* that contained nothing) on the first line. Now since the page has been started, the negative-space *control sequence* is honored. The `\vskip` *primitive* is an example of a *control sequence* that takes a dimension. Looking down the page, you will see other examples.

The next *control sequence*, `\hbox to 6.5truein`, also takes a dimension, but in this case using the extra word 'to'. The dimension in this case is in *true* inches since I did not want the value to be subject to the `\magnification` command. Two lines below this is another *control sequence*, `\line`, that does essentially the same thing, in the context of this example, since `\line` is defined in `PLAIN.TEX` to produce an *hbox* to the current dimension of `\hsize`, which happens to be 6.5 true inches. Were I later to alter the page width by changing `\hsize`, I would have to find and alter all *control sequences* of the first variety if I wanted the lines that they produced to still line up with the rest of the text, so the `\line` form is better in this case.

The text that is to be put in each of these two *hboxes* is enclosed in *grouping* symbols and contains still another *control sequence*, to wit, `\hfil`. This tells T_EX where to put the extra space needed to fill out the text to exactly 6.5 inches, with the text before the `\hfil` *flush left* and the text to the right of it *flush right*. Without this `\hfil` *control sequence*, T_EX complains (`Underfull box (badness 10000)`), and then it would print the first of these two lines as:

November	1983	Report	No.	STAN-CS-83-985
----------	------	--------	-----	----------------

But to continue with the example: `\centerline` is another *control sequence* that requires the use of *grouping* symbols to enclose the text to be centered, that is, if you want more than the single next character to be centered. Then there is an embedded *control sequence* within the *grouping symbols* which specifies that the centered text is to be in **bold face type**.

It can be a bit confusing to observe that some *control sequences* take arguments within *grouping* symbols while others are embedded within the *grouping* symbols along with the text that they affect. There is always a logical reason for this difference in treatment. When T_EX has interpreted the centering command, it must look ahead to determine how much text there is to be centered before taking any action, and it expects to find this

information within a pair of grouping symbols. By way of contrast, \TeX can start putting text in a different font without needing to know the range over which this command is to be effective. So, if you want the range of action to be limited, you put the font designation within the grouping symbols and the former font choice is reinstated when the closing symbol is reached. For a more detailed explanation, see “The \TeX book” by Don Knuth.

Next note the use of three \vfill control sequences to divide the excess vertical space that remains available on the page into three equal portions. The fact that I used one ‘l’ in \hfil and two in \vfill was deliberate, to call attention to the fact that both forms work for both horizontal or vertical fills. The double-l variety simply is more stretchable than the single-l variety and will do all of the stretching if both forms are used together.

Finally, there is some normal text at the bottom of the page and then the commands \eject \end that cause \TeX to finish off the page, to close out the DVI file and to terminate the session. Had this page been a normal text page, I would have used the control sequence \bye , the recommended way to stop, defined as $\par\vfill\supereject\end$. This closes the paragraph, checks to see that there is no text yet to be processed and causes the last page to be filled out with blank space, if necessary, instead of spreading out the text to occupy the entire page, as we wanted in this case.

It will help your understanding if you make a file containing a title page for some paper that you have written or intend to write by copying this sample and modifying it as needed. Then try to run \TeX on this file. Unless you are extremely lucky, you will be apt to get an error message that you will not understand—so read on. If you have been lucky you might try changing the page width by putting ‘ $\hsize=4truein$ ’ at the top of your input file, or better yet start \TeX so that you get the ‘**’ prompt and then type ‘ $\hsize=4truein$ ’, a space, and then \input and the name of your file.

Understanding Error Messages

Most of the errors that the beginner is apt to make, other than simple typos, will have to do with 1) missing or misplaced grouping symbols, 2) attempts to use control sequences in the wrong context, and 3) a failure to understand some of the principles that \TeX uses in deciding how to break the text into lines and these lines into pages with the result that you ask it to do some quite impossible things.

\TeX will report that “ \end occurred inside group at level 1” if a single ‘}’ is missing and “too many }’s” if the contrary condition exists. Usually, it will have reported all sorts of strange things due to a mismatch of grouping symbols. So find and fix such troubles before checking further. A somewhat similar problem may arise if you do not have matching ‘\$’ signs. You will usually get the message “Missing \$ inserted” but only after some otherwise normal text has been improperly handled.

\TeX may get confused if you tell it to do something out of context, for example, to do something that relates to the formatting of words into sentences when it is busy putting sentences onto pages. At any given time, \TeX will be operating in any one of six different

modes, as will be explained below. If you type 'h' in response to an error message that you do not understand, T_EX will try to help you by explaining what it thought that it was doing. Often the help message will suggest a way to recover from the error.

Finally, you need to know that T_EX decides how to format the text by considering the amount of 'badness' that is charged against each possible arrangement. *Penalties* are assigned to each possible line break point, usually automatically, although you can specify a penalty if you wish. These *penalties* measure the undesirability of a break occurring at each particular place. *Demerits* are assigned 1) to each line for different features as to its departure from the ideal, 2) for the presence of adjacent lines that differ from each other too much in their inter-word spacing or that are too similar in certain obnoxious ways, for example, in both ending with a hyphen, and 3) for poor paragraphing, such as leaving a *widow* word to appear at the top of a new page.

If T_EX is unable to find a solution that will meet certain tolerance limits, it will complain, usually about the 'badness', and expect you to do something to fix the difficulty. Should you want T_EX to be more tolerant, you can increase the value of `\tolerance` from 200 to, say, 1000.

The Six Modes

When T_EX is processing your text, it is constantly switching between six different *modes* of operation. The details need concern you only when T_EX reports an error on your part or when you are doing something special like making a table or displaying an equation.

The two most obvious *modes* are 1) the *horizontal mode* when T_EX is putting letters together to form words, and when it is putting spaces or glue between words, in preparation for making *hboxes* after the line breaks are chosen, and 2) the *vertical mode* when it is stacking these *hboxes* (or already prepared *vboxes*) vertically to go on a page. T_EX switches from *horizontal mode* to *vertical mode* when it encounters something that clearly indicates that it should be in the *vertical mode*, such, for example, as 1) an empty line or the *control sequence* `\par`, both of which tell it to start a new paragraph, or 2) a *v-type control sequence*, such as `\vfill` or `\vskip .1in`, both of which were used in the example on page 8. T_EX switches from *vertical mode* to *horizontal mode* when it encounters an ordinary character or any one of several *horizontal mode control sequences* such, for example, as `\indent` or `\noindent` with obvious meanings.

The six *modes* are:

Mode	Used when building
Vertical	Main vertical list for a page
Horizontal	Horizontal list for a paragraph
Internal vertical	Vertical list for a vbox
Restricted horizontal	Horizontal list for an hbox
Math	Mathematical formula for a horizontal list
Displayed math	Math formula on a separate line.

You signal the entering and leaving of the *math mode* by the use of a single '\$' sign as in '\$<math formula>\$', and the entering and leaving of the *display math mode* by the use of a pair of '\$' signs as in '\$\$<formula to be displayed>\$\$'. The display math mode is also useful for tables that may not actually involve mathematical material, because it centers material on the page and introduces a space above and below the material.

A typical use of *restricted horizontal mode* occurs when you center some material on the page by writing '\centerline{\bf First Grade \TeX }'. T_EX will be in the *vertical mode* on encountering the '\centerline' control sequence; it will shift to the *restricted horizontal mode* while processing the material delineated by the braces and then back to the *vertical mode* to add this to the material that is to form the page. Restricted horizontal mode differs from regular horizontal mode because \par and \$\$ do not end a paragraph or start a display; a single line is always produced.

Making Tables

T_EX provides two different methods for typesetting tables. The first method apes the typewriter's tab-setting ability, and is preferred for very large tables that may extend over several pages. Tabs, set by the \settabs command, are preserved when you introduce some ordinary text (or even with a *grouping-symbol*-delineated insertion of a table with a different set of tab settings). This makes it possible to have several different tables, on the same page or even on different pages, that are similar in their columnar alignments. The disadvantage is that you must specify where these tab settings are to be, either by giving the number of columns, assuming that they are to be evenly spaced, or by supplying a set of sample entries made up of the largest entry for each individual column. This works well for numerical tables but it can be a bit difficult to do if the table contains a mixture of fonts and if the characters used are of varying widths.

The more general method, which we will consider first, gives T_EX the task of setting the tab positions for each column to meet the possibly varying maximum widths of the material that goes into these different columns. This \halign method allows you to achieve an optimum design for each table, but with a possible lack of uniformity between different tables. Most of the tables in this manual were made using this method. Having made these tables, were I to find it necessary to replace an entry or even to add another column, I could depend upon T_EX to make the necessary adjustments. This method should not be used for large tables that span many pages, as T_EX must read the entire table in order to determine the column widths.

The '\halign' Alignment Method

The table near the bottom of page 4 will be used as an example. This was typed as:

```

$$\vbox {\tt \halign {\hfil #\hfil && \quad \hfil #\hfil \cr
\rm& \sl& \it& \tt& \bf\cr
\rm Roman& \sl Slanted& \it Italic& \tt Typewriter& \bf Boldface\cr
}}$$

```


Note that the first line and the last line are concerned with setting up the table, while the material that actually goes into the table appears in the second and third lines only. Had there been more lines to the table, this portion would have been expanded accordingly.

The '\$\$' at the start and end of this input-text sample is used here to center the table and to introduce some space above and below it. As explained earlier, the use of the double-dollar-sign construct normally causes T_EX to enter the *displayed math* mode. By following the '\$\$' with the `\vbox` control sequence, the other math-mode effects are temporarily suspended so that the table will appear in normal non-math characters. The `\vbox` has the additional effect of preventing T_EX from splitting the table between pages. The '{', that follows, and the very last '}' on the last line are the *grouping* symbols that define the material that is to be put in the *vbox*. Since much of the material is to be in 'typewriter' type, we start with the `\tt` control sequence, and then comes the `\halign` control sequence that requires a second set of matching braces to define the scope of the table. After the opening brace there follows a series of statements, each ending with the control sequence `\cr`.

The rest of the first line contains the first statement, sometimes called the *preamble*. This is a *template* that specifies how the different columns of the table are to be treated. It does this by referring to the material that is to go into any specific column by the parameter symbol '#', while the different columns are separated by the symbol '&'.

After the `\halign {` and before the first `&` we find `\hfil #\hfil`, which tells T_EX that the material in the first column is to be centered (by putting the same amount of stretchable glue on each side). Normally, this would be followed by a single `&` symbol, then another column specification and so on for as many columns as desired, each of which could differ in some way from the other columns, finally terminating with a `\cr`. In this case, all of the subsequent columns are to be treated the same and T_EX provides a shortcut, this being the use of two adjacent `&` symbols to tell T_EX to use as many columns as are later supplied, using the same pattern that appears between the `&&` and the terminating `\cr`. A `\quad` of extra space is put before the second and subsequent columns, to keep the columns separate. Incidentally, the `&` symbol has the useful property of ignoring any extra spaces that immediately follow it, so I have added spaces after these symbols (as well as after the *control sequences*) to make the example easier to read.

After the *preamble* there follow the two lines of data (each ending with a `\cr`) for the two lines of the resulting table. There is nothing unusual about the first text line except for the use of backslashes in pairs to tell T_EX that the backslashes are to be printed (after defining `\backslash` to mean `$$\backslash$$`). The second line is a bit unusual since each column is to be printed in a different font. You will note that we have not had to use braces to delimit the range of action of the font-specifying control sequences. This is because the `\halign` control sequence automatically limits the range of action of control sequences to the individual table entries where they are used. If no font specification appears for any specific entry, then the default font is used. This table has but two lines, but for longer tables one simply adds as many lines as desired, always ending each line with a `\cr`.

A slightly more complicated situation is illustrated by the table near the bottom of page 2. Here, the amount of material to go on each line is such that it is difficult to decide how much space to leave between the different columns. So we leave this decision to T_EX by removing the `\quad` command from the *preamble* and by specifying a value for the stretchable glue that is to be put between columns (and at the left and right) by a `\tabskip control sequence`. The table specification (which follows the usual ‘`$$\vbox{’`) then becomes:

```
\tabskip 1em plus 2em minus .5em
\halign to \hsize {\hfil #\hfil && \hfil #\hfil \cr
```

The specification `\halign to \hsize` tells T_EX to use the stretchability and shrinkability of `\tabskip` so that the width of the line is the value of `\hsize`.

We will not be concerned with the details of typing the text material itself but one additional feature is worth noting. Extra vertical space has been inserted between the different sections of the table by extra lines in the source file that read ‘`\noalign {\bigskip}`’, where ‘`\bigskip`’ is defined below. In general any desired extra (vertical mode) material may be so introduced, including one or more lines of text. PLAIN.TEX defines three convenient vertical skip instructions and it is usually better to use these, for reasons of uniformity, than to specify any specific `\vskip`. These control sequences are:

Macro	Equivalent to
<code>\smallskip</code>	<code>\vskip 3pt plus 1pt minus 1pt</code>
<code>\medskip</code>	<code>\vskip 6pt plus 2pt minus 2pt</code>
<code>\bigskip</code>	<code>\vskip 12pt plus 4pt minus 4pt</code>

The table on page 3 is an example of a still more complicated situation in which the material to go into one column is too long to be contained in one line. This requires several new features in the *preamble* (following ‘`$$\vbox{\halign{’`) which reads:

```
\tt \hfil #\hfil \quad & \tt \hfil #\hfil \quad &
\vtop {\hsize=26em \strut #\strut}\cr
```

The first thing to note is the use of a `\vbox`, this time a special one called `\vtop`, to contain the text for the last column. The `\vtop` differs from a `\vbox` in that it is aligned at the baseline of its top line. The width of this box is defined by `\hsize=26em`, a figure that was determined by cut and try. The `\struts` were introduced to make sure that the space allowed for the `\vtop` would not be adversely affected if the first line of text in the box had no tall letters, or if the last line of text happened to have no descenders, since `\vboxes` are normally made only high enough to enclose the material that they contain. A `\strut` produces a zero-width invisible box of the correct height and depth for the font being used. Incidentally, a character can be assigned a zero width and still not be invisible. It would still print, but then it would be over-printed by the next character.

If you want to make tables that are significantly more complicated than those used so far, you need to be an expert, so you will have to study The T_EXbook. The following example illustrates still other features. This example is taken from The T_EXbook and attributed to

Michael Lesk as published in the Bell Laboratories Computing Science Technical Report 49 (1976).

AT&T Common Stock		
Year	Price	Dividend
1971	41-54	\$2.60
2	41-54	2.70
3	46-55	2.87
4	40-53	3.24
5	45-52	3.40
6	51-59	.95*

* (first quarter only)

This table was produced by typing:

```

$$\vbox{\tabskip=0pt \offinterlineskip
\halign to150pt{\strut#& \vrule#\tabskip=1em plus2em& \hfil#& \vrule#&
\hfil#\hfil& \vrule#& \hfil#& \vrule#\tabskip=0pt\cr \noalign{\hrule}
& & \multispan5\hfil AT&T Common Stock\hfil& \cr \noalign{\hrule}
& & \omit\hidewidth Year\hidewidth& & \omit\hidewidth Price\hidewidth& &
\omit\hidewidth Dividend\hidewidth& \cr \noalign{\hrule}
& & 1971& & 41--54& & \$2.60& \cr \noalign{\hrule}
& & 2& & 41--54& & 2.70& \cr \noalign{\hrule}
& & 3& & 46--55& & 2.87& \cr \noalign{\hrule}
& & 4& & 40--53& & 3.24& \cr \noalign{\hrule}
& & 5& & 45--52& & 3.40& \cr \noalign{\hrule}
& & 6& & 51--59& & .95\rlap*& \cr \noalign{\hrule}
\noalign{\smallskip}
& \multispan7* (first quarter only)\hfil\cr}}$$

```

The most obvious difference, between this table and the ones discussed so far, is the use of so-called 'rules', to enclose and separate the entries. You will also note that one entry extends over several columns within the area defined by the outside rules and the last entry also extends over several columns. Finally, while the numerical items in the Year column and in the Dividend column seem to be 'flush right', the words 'Year' and 'Dividend' and entry '.95*' are certainly not.

Referring to the listing, we first reset some parameters. Setting `\tabskip=0pt` may not be needed since `\tabskip` is usually set to zero, but this is a precaution. `TeX` normally puts some `\tabskip` glue before the first column, between columns, and after the last column in each line of an alignment (if `\tabskip` is not zero), and we will want to take advantage of this feature later to help center the entries.

The `\offinterlineskip` control sequence is used to set the usual interline spacing to zero. This prevents `TeX` from interposing glue between the the individual `\vrule` segments, glue that would prevent them from abutting each other properly. Having done this, we must then specify the vertical space assigned to these `\vrules` (and to the text as well) by using

a `\strut`. As explained earlier, this produces a zero-width invisible box of the correct height for the font being used and the `\vrules` are, of course, produced to this height.

The `\halign` to `<dimen>` comes next, then the *preamble*. The first thing to note about the *preamble* is that eight columns are specified, not just the three that contain the data. A template is specified for each column. The first template contains `# \strut`, but no values are specified to match the `#` sign so only the `\strut` is ever put in this column, but this does fix the vertical space allowed for the `\vrule` segments and for the text. The initial `&` in the listings of the row data that follow the *preamble* is all that is necessary to cause the `\strut` to apply to the entries in each row. The four `\vrule` segments in each row after the first are similarly called into action by the second, fourth, and sixth `&` symbol in the row specification and by the final `\cr`.

The first row of data containing 'AT&T Common Stock' is an exception to the general rule, in that this caption spans five columns as signalled by the *control sequence* `\multispan 5`. The next row also illustrates how you *omit* the application of the formatting rules specified in the *preamble* by using `\omit control sequence` and how you prevent the widths of the entries from being used to determine column width by the *hidewidth control sequences*. Finally, the `\rlap` command is used to overlap the `*` symbol in one entry so that its width is not considered in making the alignment. One final detail: note the `\noalign{\hrule}` statements that define the horizontal *rules*.

The Fixed-Column-Width '`\settabs`' Method

The fixed-column-width `\settabs` method can be used in simple cases when the fixed width restriction is of no consequence. It also functions best where the entries can all be left aligned. The table on page 4 does not meet these restrictions but it will reveal most of the complications that you are apt to encounter. So you type the following, noting the use of the `\+` *control sequence* to start each row and the `\cr` *control sequence* to end it:

```
$$\vbox{\tt \settabs 5 \columns
+\rm& \sl& \it& \tt& \bf\cr
+\rm Roman& \sl Slanted& \it Italic& \tt Typewriter& \bf Boldface\cr
}$$
```

You get five columns, each flush left:

<code>\rm</code>	<code>\sl</code>	<code>\it</code>	<code>\tt</code>	<code>\bf</code>
Roman	<i>Slanted</i>	<i>Italic</i>	Typewriter	Boldface

You can make the columns narrower by calling for an extra unused column. You can center the text in the columns by introducing '`\hfill`' *control sequences* both before and after each entry (using '`\hfil`' *control sequences* will not work) and by adding an extra `&` symbol after the last entries (to force `TEX` to handle the last column like all of the rest). All of this gets to be more trouble than to use the '`\halign`' method but you can type:

```


$$\begin{array}{ccccc}
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface}
\end{array}$$


```

The Variable-Column-Width ‘\settabs’ Method

The variable-column-width method line does a somewhat better job. This method requires you to supply a sample row for the table, which you type in place of the ‘5 \columns’ on the first line (this sample is used for dimensions only and is not printed). You use the largest entry taken from each column and you add some desired amount of space between entries. In this case the sample line will have all of its entries taken from the second row of the table, which is a bit tricky, since these entries are all in different typefaces.

Here you type:

```


$$\begin{array}{ccccc}
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface} \\
\text{Roman} & \text{Slanted} & \text{Italic} & \text{Typewriter} & \text{Boldface}
\end{array}$$


```

to get a table similar to the one on page 4 except for a slight difference in centering.

Typing Mathematical Formulas

Math formulas are, by tradition, printed using different conventions from those used for printing ordinary text. Some of these differences may seem quite trivial but they contribute greatly to the legibility and yes even to the beauty of well-printed mathematical texts. Fortunately, T_EX knows about these math conventions and can usually be trusted to follow them.

Some of these conventions are: 1) Alphabetic characters are printed in *math italics* rather than in a more normal font and *math italics* differs in minor detail from normal *italics*. 2) Many special symbols are used that are not available in the normal text mode, such as Greek letters and conventional mathematical symbols, \geq , \leq , \neq , \approx , etc. 3) The spacing conventions are different from those used in ordinary text. In fact, T_EX completely ignores the spaces that you use in typing formulas and applies its own spacing rules (e.g., $x + y$ instead of $x + y$ or $x+y$). 4) The alignment rules are also quite special as you will observe in later examples, and many symbols are frequently printed in enlarged forms. 5) Superscripts and subscripts are used and these are normally automatically reduced in size, such as in x^a (typed as $\$x^{\wedge}a\$$) or as in $x_{a,b}$ (typed as $\$x_{\wedge}a,b\$$). 6) It is also customary to use a somewhat different style for printing formulas that are displayed on separate lines from the style used for formulas within text.

A *math mode* formula is enclosed within either single dollar signs '\$...\$', if the formula is to appear in a line with ordinary text, or within double dollar signs '\$\$...\$\$', if the formula is to be typed on a separate line, in so-called *display math mode*.

Eight different styles of math typesetting are used, four regular styles and four "cramped" variations. The letters and numbers are typeset in three different sizes, these being text size ($x + y - z$), script size ($x+y-z$), and scriptscript size ($x+y-z$). If you want to enforce a size that T_EX might not otherwise use, as was just done, you use the control sequences `\scriptstyle` and `\scriptscriptstyle`. The display style and the text style use the same size letters and numbers but differ in the sizes used for *large operators*, in the positioning of exponents and in the way they handle fractions. Should you want to enforce the use of either the text style or the display style, you can use the control sequences `\textstyle` or `\displaystyle`. A discussion of how these styles are used in fractions will be deferred until later.

Symbols classed as *large operators* (including the 'summation' and 'integration' signs \sum and \int) are printed in a larger size when in display math mode from the way they appear in normal math mode. If you type `\sum_{n=1}^m` you get $\sum_{n=1}^m$ and if you type `\int_{-\infty}^{+\infty}` you get $\int_{-\infty}^{+\infty}$. On the other hand, these same expressions typed as display formulas yield:

$$\sum_{n=1}^m \quad \text{and} \quad \int_{-\infty}^{+\infty}$$

The control sequence `\nolimits` will cause the summation sign to have subscripts and superscripts just as in the text mode, and the control sequence `\limits`, if typed after the `\int` will cause the integration limits to appear above and below the integral sign thus:

$$\sum_{n=1}^m \quad \text{and} \quad \int_{-\infty}^{+\infty}$$

The following example illustrates the way in which T_EX will increase the size of certain symbols and will make the horizontal lines long enough to extend over the sub-formula to which they apply and high enough or low enough not to bump into it. Typing: `$$\sqrt{1+\sqrt{1+\sqrt{1+\sqrt{1+\sqrt{1+\sqrt{1+x}}}}}}$$` produces:

$$\sqrt{1 + \sqrt{1 + \sqrt{1 + \sqrt{1 + \sqrt{1 + \sqrt{1 + x}}}}}}$$

The *control sequence* '`\over`' is used to specify fractions, and the fraction line is made as long as needed. T_EX assumes that everything within the same sub-formula grouping before the '`\over`' *control sequence* is to go above the line and everything that follows, again within the same sub-formula grouping, is to go below the line that '`\over`' generates. A variant, called '`\above`', allows you to specify the weight of the line, thus:

`$$\{a\over 1+b\}+c$$` yields $\frac{a}{1+b} + c$ and `$$\{a\above2pt1+b\}$$` yields $\frac{a}{1+b}$

As an aside, there are four related control sequences (while in display math mode):

`{a\atop 1+b}` `{n+1\choose k}` `{m\brack n}` `{m\brace n-1}` that yield:

$$\frac{a}{1+b} \quad \binom{n+1}{k} \quad \left[\begin{matrix} m \\ n \end{matrix} \right] \quad \left\{ \begin{matrix} m \\ n-1 \end{matrix} \right\}$$

\TeX provides a somewhat similar extendability with respect to parentheses and other delimiters, this time to extend them vertically as required. By using the *control sequences* ‘`\left`’ before a left delimiter and ‘`\right`’ before the corresponding right delimiter, you can let \TeX decide as to the correct size of delimiter to use. The ‘`\left`’ and ‘`\right`’ *control sequences* have an auxiliary function in that they also act as *grouping* symbols so it is not necessary to use the ‘`{`’ and ‘`}`’ symbols with them (unless, of course, these are the delimiters to be printed, and then they must be typed as `\{` and `\}`). It is necessary to use the `\left` and `\right` *control sequences* in matching pairs (although the delimiters themselves need not match).

The following example illustrates these features:

You type `$$1+\left(1\over 1-x^2\right)^3$$` to get $1 + \left(\frac{1}{1-x^2}\right)^3$

This example introduces yet another feature, namely the handling of exponents, which was alluded to briefly once before. The ‘`^`’ is used to indicate a superscript and its companion the ‘`_`’ is used to indicate a subscript. Both normally apply only to the next character so you must use *grouping* symbols for those cases where a multi-character superscript or subscript is to be shown. Thus if you type:

`$$1+\left(1\over 1-x^{\{21\}_3}\right)^{\{32\}}$$` you get $1 + \left(\frac{1}{1-x_3^{21}}\right)^{32}$


A series of *control sequences* for specifying delimiter sizes are available for use in situations where \TeX may not make the desired choice. For opening delimiters these are, in order of increasing size: `\bigl`, `\Bigl`, `\biggl`, and `\Biggl` and for closing delimiters they are `\bigr`, `\Bigr`, `\biggr`, and `\Biggr`. It should be noted that the `\bigl` and `\bigr` delimiters are larger than ordinary ones so that the difference can be perceived, yet small enough to be used within the text of a paragraph. Even larger delimiters than those named can be made by using the `\left` and the `\right` conventions and by adding an empty `\vbox` of the appropriate size within the field when necessary. For example, you can type:

```

$$\left(\vbox to 27pt{}\left(\vbox to 24pt{}\left(\vbox to 21pt{}
\Biggl(\biggl(\Bigl(\bigl(\scriptstyle(\scriptscriptstyle
(\hskip3pt))\bigr)\Bigr)\biggr)\Biggr)\right)\right)\right)
(With sets of three similar lines added for brackets and for braces)$$

```

to get

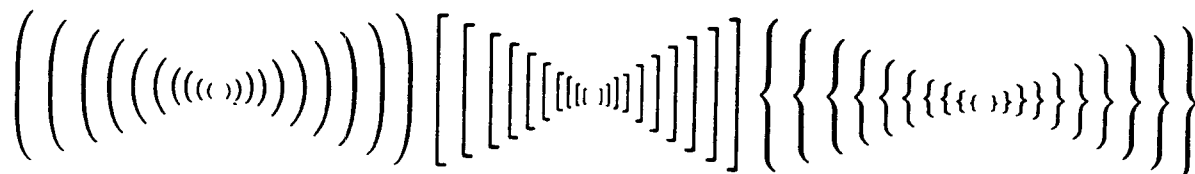

TeX recognizes 16 other basic delimiters that can be obtained in different sizes, either by using the `\left` and `\right` technique or by specifying their size as illustrated above for parentheses, brackets, and braces. There are restrictions as to the sizes available for `\langle`, `\rangle`, `/`, and `\backslash`, but not for the other extendable delimiters.

Additional extendable delimiters for use in *Display Math* mode:

For	You type	For	You type	For	You type	For	You type
[<code>\lfloor</code>	<	<code>\langle</code>		<code>\vert</code>	↓	<code>\downarrow</code>
]	<code>\rfloor</code>	>	<code>\rangle</code>		<code>\Vert</code>	⇓	<code>\Downarrow</code>
[<code>\lceil</code>	/	<code>/</code>	↑	<code>\uparrow</code>	⇕	<code>\Updownarrow</code>
]	<code>\rceil</code>	\	<code>\backslash</code>	↑	<code>\Uparrow</code>	⇕	<code>\Updownarrow</code>

Before considering matrices and other uses of large delimiters, let us dispose of the matter of fractions. It is usually wise to avoid the use of more than one `\over` in an equation and remember that there cannot be more than one `\over` in any one subexpression. In fact, it is often preferable to use the “slashed” fraction form, particularly for mathematical expressions that are not printed as separate displays.

When you do use more than one `\over`, you probably should introduce our old friends `\strut` and `\displaystyle` to keep the spacings and character sizes from shrinking alarmingly. Certainly,

$$a_0 + \frac{a}{a_1 + \frac{1}{a_2 + \frac{1}{a_3 + \frac{1}{a_4}}}}$$

typed as `$$a_0+{a\over\displaystyle a_1+{\strut 1\over\displaystyle a_2+{\strut 1\over\displaystyle a_3+{\strut 1\over\displaystyle a_4}}}}$$`

looks better than

$$a_0 + \frac{a}{a_1 + \frac{1}{a_2 + \frac{1}{a_3 + \frac{1}{a_4}}}}$$

which is what you get without `\strut` and `\displaystyle`.

As an exercise, you might reproduce this example and make several copies, one without using `\strut` and another without `\displaystyle`, to reveal the exact effect of these refinements.

Perhaps the most common use of large delimiters is in printing matrices, where the `\matrix` macro can be used. This macro is similar in many respects to the `\halign` macro that was discussed starting on page 12 except that `\matrix` only works in math mode, and no template need be supplied. To get:

$$A = \begin{pmatrix} x - \lambda & 1 & 0 \\ 0 & x - \lambda & 1 \\ 0 & 0 & x - \lambda \end{pmatrix} \quad \text{you type} \quad \begin{code} \begin{matrix} \text{\$A=\left(\matrix{x-\lambda&1&0\cr} \\ \text{0&x-\lambda&1\cr} \\ \text{0&0&x-\lambda\cr}\right)\$\$} \end{matrix}$$

It helps in typing a matrix such as this if you line up the columns, which you can do since `TeX` pays no attention to the spaces that you leave. So you might type:

```

\begin{code}
\begin{matrix}
\text{\$A=\left|\matrix{
x-\mu & 1 & 0 \\
0 & x-\mu & 1 \\
0 & 0 & x-\mu}
\right|\$\$}
\end{matrix}
\end{code}

```

This, of course, produces:

$$A = \begin{vmatrix} x - \mu & 1 & 0 \\ 0 & x - \mu & 1 \\ 0 & 0 & x - \mu \end{vmatrix}$$

since I used vertical bars instead of parentheses, and I substituted `\mu` for `\lambda` just to be different. If you are wondering how I was able to preserve the spacings in showing you what I typed, I used plain `TeX`'s macros, `\parskip=0pt \obeylines \obeyspaces`.

Ellipses (i.e., dots) are used in many places but they appear to good advantage in matrices where you might type:

```

\begin{code}
\begin{matrix}
\text{\$A=\pmatrix{
a_{11}&a_{12}&\ldots&a_{1n}\cr
a_{21}&a_{22}&\ldots&a_{2n}\cr
\vdots&\vdots&\ddots&\vdots\cr
a_{m1}&a_{m2}&\ldots&a_{mn}\cr}
\end{matrix}
\end{code}

```

to get

$$A = \begin{pmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & a_{22} & \dots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1} & a_{m2} & \dots & a_{mn} \end{pmatrix}$$

Here `\pmatrix` is like `\matrix`, but it puts parentheses in for you.

The `\ldots` control sequence (as in the above matrix) is used between letters and commas while another control sequence, `\cdots`, is used between signs and similar operators as in $a + b + \dots + z$. Incidentally, a single centered dot is a `\cdot`. Still another control sequence, `\dots`, is used for ellipses in non-math text ..., when needed.

Single braces are often used in referring to different cases and plain `TeX` provides a convenient macro, you guessed it, called `\cases`. This bears a remarkable resemblance to `\pmatrix` except that, 1) only one delimiter, a brace, is printed, 2) the entries are adjusted flush left in each of two columns, and 3) the material that appears after the `&`

symbol is not in math mode unless specifically surrounded with '\$' symbols. For example, to get:

$$|x| = \begin{cases} x, & \text{if } x \geq 0; \\ -x, & \text{otherwise.} \end{cases}$$

you type

```
$$|x|=\cases {x,&if $x\ge0$;\cr -x,&otherwise.\cr}$$
```

If a '\left'-specified left delimiter without a matching right delimiter is needed elsewhere, you can use '\right.' as a null right delimiter, where the period is not printed but acts to terminate the extent of the grouping (as it affects the size of the beginning delimiter). Similarly, 'left.' may be used to specify a null left delimiter.

Roman characters and words may be printed within mathematical formulas using three quite different mechanisms. For only an occasional letter or word, you can switch to roman and type:

```
$\exp(x+\rm constant)$ to get exp(x + constant)
```

This will still work for several words but, since spaces are ignored, you have to use the control sequence '\ ' to preserve the spacings between words.

The second way is to use a \hbox. Thus to get:

```
 $x^3 + \text{lower order terms}$  you type $x^3+\hbox{lower order terms}$
```

This scheme was used to type this very example and it has been used extensively throughout this manual. It has two obvious disadvantages, 1) the current (text) font will be used, and it may not be the font you want (but this can be fixed) and 2) the content of the box will always be in the same size unless extra precautions are taken when the words are wanted in a different size, perhaps for use in a superscript or subscript.

Finally, if you plan to use a word or a fixed sequence of roman typed words frequently in different mathematical formulas, for example the sequence just used, then you can assign a name to it as one of your own macros thus:

```
\def\loterms{\hbox{\rm lower order terms}}.
```

Thereafter when you want the sequence 'lower order terms' you simply type \loterms. The above example would then be typed as '\$x^3+\loterms\$'.

Since the names of the common mathematical function are always set in roman type, the following control sequences have been predefined in plain T_EX:

\arccos	\cos	\csc	\exp	\ker	\limsup	\min	\sinh
\arcsin	\cosh	\deg	\gcd	\lg	\ln	\Pr	\sup
\arctan	\cot	\det	\hom	\lim	\log	\sec	\tan
\arg	\coth	\dim	\inf	\liminf	\max	\sin	\tanh

These *control sequences* lead to roman type with appropriate spacing. Certain of these are treated as *large operators* (just like `\sum`), to wit: `\det`, `\gcd`, `\inf`, `\lim`, `\liminf`, `\limsup`, `\max`, `\min`, `\Pr`, and `\sup`. The following examples are taken from The $\text{T}_{\text{E}}\text{X}$ book but rearranged to use the `\cases` control sequence, to demonstrate that `\cases` will work for a larger array than previously shown.

To get	You type (while in math mode)
$\sin 2\theta = 2 \sin \theta \cos \theta$	<code>\sin2\theta=2\sin\theta\cos\theta</code>
$O(n \log n \log \log n)$	<code>O(n\log n\log\log n)</code>
$\Pr(X > x) = \exp(-x/\mu)$	<code>\Pr(X>x)=\exp(-x/\mu)</code>
$\max_{1 \leq n \leq m} \log_2 P_n$	<code>\displaystyle\max_{1\le n\le m}\log_2P_n</code>
$\lim_{x \rightarrow 0} \frac{\sin x}{x} = 1$	<code>\displaystyle\lim_{x\to0}{\sin x\over x}=1</code>

Incidentally, I wanted these examples to be spaced a little farther apart than they would be with the spacing set by `\cases`. So I inserted `\noalign{\vskip2pt}` after every `\cr` (except the last one).

Punctuation should be used with caution. When a formula is followed by punctuation, such as a period or a comma, put the punctuation after the terminating `\$` sign, when the formula is in text (even in the extreme case when you type something like ‘`\$x=a\$, \$b\$, or \$c\$.`’); but put the punctuation before the terminating `\$\$` when the formula is displayed. Note: Punctuation symbols have been omitted from the display equations used so far in this manual (so as not to confuse you), but I will start using them now.

Numbering isolated display formulas poses no special problem as plain $\text{T}_{\text{E}}\text{X}$ provides two control sequences, `\eqno` for numbers that are to go on the right, and `\leqno` for numbers that are to go on the left. In both cases, these control sequences go after the formula to be numbered. They act much like our old friend `\&` in that they separate two fields; everything to the left is part of the formula and everything to the right up to the terminating `\$\$` will appear as the equation number.

Thus, `\$\$(x+y)(x-y)=x^2-y^2.\eqno(21)\$\$` will produce:

$$(x + y)(x - y) = x^2 - y^2. \tag{21}$$

If you type, `\$\$(x+y)(x-y)=x^2-y^2.\leqno[21a]\$\$` you will get:

$$[21a] \quad (x + y)(x - y) = x^2 - y^2.$$

The formulas are centered in both cases (without regard for the presence of the formula numbers), and the formula numbers are in math style unless you specify otherwise.

Several display formulas, appearing together, can be aligned at any desired location (on an equal sign perhaps) by using the control sequence `\eqalign`, which works with `\&` and

`\cr` in a manner somewhat similar to the use of these markers in `\matrix` and `\cases`. For example, if you type:

```
$$\eqalign{ax^2+bx+c=0\cr x&={-b\pm\sqrt{b^2-4ac}\over2a}.\cr}$$
```

you get

$$ax^2 + bx + c = 0$$

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}.$$

If you want the equations individually numbered, you use `\eqalignno` and add a second `&` with the number added as usual for each equation that is to be numbered. Typing:

```
$$\eqalignno{ax^2+bx+c=0&(1)\cr x&={-b\pm\sqrt{b^2-4ac}\over2a}.\&(2)\cr}$$
```

 produces

$$ax^2 + bx + c = 0 \tag{1}$$

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}. \tag{2}$$

Using `\eqalign` (not `\eqalignno`) and adding `\eqno(3)`, for example, will cause the set of formulas to be numbered as a group, with the number centered vertically with respect to the group, producing:

$$ax^2 + bx + c = 0$$

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}. \tag{3}$$

It is also possible to introduce extra text lines between the different formula lines without disturbing the alignment, for example by including `\noalign{\hbox{This is the text to be introduced}}`. Finally, using `\leqno` and `\leqalignno`, with an initial letter ‘1’ and with no other changes, will cause the formula numbers to be placed at the left.

Some fundamental differences between `\eqalign` and `\eqalignno` should be noted.

`\eqalign` makes a single vertically-centered `vbox` that is no wider than necessary, that cannot be broken between pages, and that can only take a single vertically-centered equation number. More than one `\eqalign` can be put on a line (if space permits).

`\eqalignno` generates full-width lines. These lines can be broken between pages and the individual lines can take individual line numbers. `\eqno` cannot be used with `\eqalignno` to assign a group equation number. Lines of normal text can, however, be placed between the `\eqalignno` equation lines by using the `\noalign{\hbox{...}}` construction.

Long equations pose a difficult problem, particularly if they must still be aligned in some way with other equations in a group, and you may have to help \TeX to do a satisfactory job. One solution is illustrated below.

$$\begin{aligned}
 x_n u_1 + \cdots + x_{n+t-1} u_t &= x_n u_1 + (a x_n + c) u_2 + \cdots \\
 &\quad + (a^{t-1} x_n + c(a^{t-2} + \cdots + 1)) u_t \\
 &= (u_1 + a u_2 + \cdots + a^{t-1} u_t) x_n + h(u_1, \dots, u_t). \quad (47)
 \end{aligned}$$

The first and third lines were aligned on the = signs as usual but then we wanted the second line to be aligned with the + sign as shown, and the `\equalignno` control sequence makes no provision for secondary alignments. The solution is to use the control sequence `` which causes \TeX to leave the same amount of space that would be taken by the indicated text without printing it. So we put a `` in front of the second line and align it with the other two lines on the = sign. This does not work perfectly because the `\phantom` command creates an empty box of the size necessary to contain the indicated characters without regard for their surroundings and the space allowed before the = and + signs depends on the context. The net result is that we have to add a bit of space defined by `'\;`. So what we type is:

```

\equalignno{x_nu_1+\cdots+x_{n+t-1}u_t
&x_nu_1+(ax_n+c)u_2+\cdots\cr
&\phantom{=x_nu_1}\;+\bigr(a^{t-1}x_n+c(a^{t-2}+\cdots+1)\bigr)u_t\cr
&=(u_1+au_2+\cdots+a^{t-1}u_t)x_n+h(u_1,\ldots,u_t)_ \quad \&(47)\cr

```

Normally, you can depend on \TeX to space things correctly, but when \TeX needs your help while in math mode, you can use the following:

You type `\!` `\,` `\>` `\;`
To get $-1/6$ quad $1/6$ quad $2/9$ quad $5/18$ quad

Some other math features, not yet covered, are the use of `\prime` to produce prime superscripts and subscripts where you type:

`$ y_1^{\prime}+y_2^{\prime\prime}+y_3^{\prime\prime\prime}$` to get $y_1' + y_2'' + y_3'''$,

the use of `\root` where, `$\root 3 \of {x^2+y^2}` produces $\sqrt[3]{x^2 + y^2}$,

and the use of `\mathstrut` to enforce uniformity in the positioning, say, of the square root signs by typing `$\sqrt{\mathstrut a}+\sqrt{\mathstrut d}+\sqrt{\mathstrut y}$` to get $\sqrt{a} + \sqrt{d} + \sqrt{y}$ instead of $\sqrt{a} + \sqrt{d} + \sqrt{y}$.

There are, also, two variations on `\phantom` that you will find useful, `\vphantom` with zero width and `\hphantom` with zero height and depth, and there is `\smash` which tells \TeX to print a subexpression but to assume that it has zero height and depth.

Some Odds and Ends

You are about ready to undertake ordinary typing on your own but you still do not know how to produce footnotes,* how to allow for insertions, and how to change the page format if you do not want the pages numbered at the bottom.

If you should like your footnotes to be numbered automatically, even this can be done by defining a new control sequence which might be called `\note`.¹ Before the first footnote² to be so numbered you write (as I have done):

```
\newcount\notenum  
\def\clearnotenum{\notenum=0}  
\def\note{\advance\notenum by 1 \footnote{${\the\notenum}$}}  
\clearnotenum
```

There is an art to inserting illustrations or other independently derived material into a text. A number of people are working on supplements to \TeX to allow for the direct introduction of computer derived graphics into \TeX output, but I will assume that you will be content to add photographs and graphical material manually.

Plain \TeX provides for three basic types of insertions, `\topinsert`, `\midinsert`, and `\pageinsert`. These can only be given between paragraphs and not inside boxes or other insertions. The general form for these is: `\topinsert <vertical mode material that can have embedded paragraphs> \endinsert`.

\TeX tries to put a `\topinsert` at the top of the current page, if there is still room when the `\topinsert` is encountered, otherwise it will be put at the top of the next page. If several `\topinsert` commands are given close together, some may be carried to still later pages. The `\midinsert` is put on the page in the position where it appears, if this is possible, otherwise it is handled as a `\topinsert`. A `\pageinsert` is automatically expanded to fill an entire page and put on the next page. Complications requiring human intervention may arise if \TeX is asked to put pageinserts and footnotes on the same page and if both `\topinserts` and footnote extensions are carried over to a following page.

I will now type a `\topinsert`, which, as you can see, appears at the top of the next page. Perhaps you should read it now, if you have not already done so.

* Like this, which was produced by typing `\footnote{*}{Like this, which was produced by typing ...}` right along following the macro itself. \TeX will usually do the right thing like putting the indicated mark (which is typed in the first set of braces) in the text where the macro `\footnote` appears and putting the footnote itself (which was typed in a second pair of braces) at the bottom of the same page and even dividing an extra long footnote between pages.

¹ This should be footnote number 1.

² You can also number equations automatically (but that's a different story).

This is a `\topinsert`.

This text is printed in this shape both to set it apart from the rest of the text, as befitting a `\topinsert`, and to demonstrate that it is possible to specify an essentially arbitrary paragraph shape by saying `\parshape=n`, where n is the number of lines, and by following this with the n sets of dimensions for these lines, each specified as one number for the indentation and a second number for the length of the line. For a more detailed explanation, see The `TEXbook`, chap. 14, page 101. In this case, these lines, so specified, were put into a box and this box was used as a `\topinsert`.

Fig. E. This is a `\topinsert`

This example may be a bit too complicated to explain in detail but in essence it involved the creation of a box by the command `\setbox0=\vtop{ ... }`, where the dots stand for the command `\parshape 10` followed by the specification of the line indentations and lengths and then by the text itself. Having defined such a box it was then only necessary to give the commands:

```
\topinsert
\box0
\vskip10pt
\centerline{\bf Fig. E. This is a \topinsert}
\endinsert
```

to tell `TEX` to generate the `\topinsert`.

If there is any danger of an insertion that does not get made before the end of the appropriate section, you can force its printing by typing `\vfill\supereject`.

You should also know how to produce so-called *leaders*, such as these, which are often used in Tables of Contents.

Introduction	1
Toward Book Quality	2

The examples shown here were typed as:

```
\def\leaderfill{\leaders\hbox to 1em{\hss.\hss}\hfill}
\line{\qqquad\qqquad Introduction\leaderfill 1\qqquad\qqquad}
\line{\qqquad\qqquad Toward Book Quality\leaderfill 2\qqquad\qqquad}
```

Still another feature, with `\parindent` set to some non-zero amount (it is set to 20pt in plain `TEX` and to 35pt for this example), the control sequence `\narrower` followed by { the desired contents of the paragraph ending with a `\smallskip` (also within the enclosing braces) }, will cause a paragraph, such as this one, to be narrowed by the `\parindent` amount.

Output Routines

Defining variant forms of output routines is properly in the domain of the T_EXpert, but you may like to have a choice of at least one other format which I am now using, starting with this page. This change was introduced by typing:

```
\nopagenumbers % suppress footlines
\headline={\ifodd\pageno\rightheadline \else\leftheadline\fi}
\def\rightheadline{\tenrm\hfil A Beginner's \TeX\ Manual\hfil\folio}
\def\leftheadline{\tenrm\folio\hfil First Grade \TeX \hfil}
```

Of course, if you want to get fancy, you can have T_EX automatically use your current chapter or section headings as running heads, but this may be too much for the beginner.

Defining Macros

Several macros have been defined and used in this manual, a typical one being:

```
\def\loterms{\hbox{\rm lower order terms}}.
```

Such macros all begin with the control sequence ‘\def’ followed by the new name and then the meaning to be assigned to this new name (enclosed in braces that are not a part of the definition). If braces are wanted as a part of the definition they must be added.

As useful as these simple macros are, you will come across numerous situations where you will want to define a macro that can take parameters that are to be defined at the time the macro is used. You have already been introduced to control sequences of this sort that were defined in PLAIN.TEX, and that you have learned to use.

One such definition is: `\def\centerline#1{\line{\hss#1\hss}}`.

This says that if T_EX encounters the command `\centerline`, it is next to look for a parameter that is here designated as #1 which you should have typed in braces following the `\centerline` command. T_EX is then to apply the control sequence `\line` to the braced expression `\hss#1\hss`, where `\line` is itself a derived control sequence defined as `\def\line{\hbox to\hsize}`. In other words—**Center It on a Line!**

Two things are to be noted: 1) It is possible to use other control sequences within definitions and 2) The symbol #1 is used to designate a parameter that is given to T_EX at the time that the control sequence is invoked. Actually, up to 9 parameters can be so specified. The definition might then take the form `\def\zzz#1#2#3{a complex expression in which #1, #2, and #3 can be used in any order and repeatedly if needed}`. The parameters, as listed following the name of the control sequence, must, however, be in serial order.

It is also possible to write macros that are conditional. A simple example of a conditional macro was used to define the current page format, as explained earlier on this page, when

we typed: `\headline={\ifodd\pageno\rightheadline\else\leftheadline\fi}`. Note particularly the use of `\fi` (if spelled backward) to end the conditional.

To round out our discussion of `\def`, we will note that there exists a `\let` primitive that is somewhat analogous to `\def` but differs from it in the timing of its execution. The difference can most easily be explained by noting that the expression `\let\b=\a` sets the value of `\b` to the value of `\a` at the time when this expression is read by T_EX, while `\def\b{\a}` does not set the value of `\b` to the value of `\a` until this macro is executed.

Before naming a new macro, it is always wise to make sure that the proposed name is not already in use either by T_EX itself or by the macro package that you intend to use. You can do this by interrogating T_EX directly. Simply run T_EX82 without specifying a file name and in response to the asterisk prompt type `\show` followed by the proposed name. If your macro package is not preloaded, you will want to load it before typing the `\show`.

For	A Macro	A Primitive	An undefined name
Typing	<code>\show\centerline</code>	<code>\show\hbox</code>	<code>\show\zzzz</code>
Shows	<code>> \centerline=macro: #1->\line{\hss#1\hss}. <*> \show\centerline ?</code>	<code>> \hbox=\hbox. <*> \show\hbox ?</code>	<code>> \zzzz=undefined. <*> \show\zzzz ?</code>

The line beginning with `#1->` for the `\centerline` case, shows that the macro expects one parameter and this parameter is then used in the topression that follows. The next to last line is to show you what T_EX has read and the last line is asking you what you want to do about it. A carriage return will restore the asterisk prompt, and you can then type another `\show`, or give a `\input` command.

By way of summary, there are several ways to assign meaning to a control sequence:

Typing	<code>\font\cs=\</code>	makes <code>\cs</code>	a font identifier
	<code>\chardef\cs=\<num.></code>		a character code
	<code>\countdef\cs=<num.></code>		a <code>\count</code> register
	<code>\def\cs...{...}</code>		a macro.
Typing	<code>\let\cs=<token></code>	gives <code>\cs</code>	the token's current meaning.

You will need to know quite a bit more before you can be an efficient macro designer. The whole story appears in Chapter 20 of The T_EXbook.

Two special macro packages are soon to be available. L^AT_EX by Leslie Lamport probably will appeal to the computer programmer, while AMS-T_EX by Michael Spivak probably will appeal to the mathematician. Both packages allow the user to specify one of several formatting styles by name and in so doing they greatly simplify the task of using T_EX. F_Acil T_EX by Max Díaz is also a contender but no date is available for its conversion to T_EX82.

Appendix

Characters that are reserved for special purposes: \ { } \$ & # % - _

To print	- - -	- - -	"text"	ı	ı	\$	#	&	%	æ	Æ	œ	Œ	å
You type	--	---	\$-\$	'	'	\\$	\#	\&	\%	\ae	\AE	\oe	\OE	\aa

Å	ß	ø	Ø	à	é	ô	ü	ÿ	ñ	þ	ı	ş	j	û	k
\AA	\ss	\o	\O	\`a	\`e	\`o	\`u	\=y	\~n	\.p	\~ı	\vs	\Hj	\tı	\b k

ç	h	ı	L	†	‡	§	¶	ø	£	©	...	
\c c	\d h	\l	\L	\dag	\ddag	\S	\P	\rlap/c	\it\\$	\it&	\copyright	\dots

Line break controls: \break \allowbreak \nobreak \hbox{unbreakable} dis\ -cre\ -tion\ -ary hy\ -phens virgule/breakpoint: \slash

Breakable horizontal spaces:	Unbreakable horizontal spaces:
_ normal interword space	_ normal interword space
\enskip this much	\enspace this much
\quad this much	\thinspace this much
\qqquad this much	\negthinspace this much
\hskip <arbitrary dimen>	\kern <arbitrary dimen>

Vertical spaces: \smallskip == \medskip == \bigskip ==

Page break controls: \eject \supereject \nobreak \goodbreak \filbreak
 Vertical spaces and good breakpoints: \smallbreak \medbreak \bigbreak

\line{\downbracefill} \hrulefill — \dotfill \line{\upbracefill}

\rm Roman \sl Slant \it Italic \tt Typewriter \bf Boldface

Typical font table (\rm for amr10). If necessary, one can type \char'10 to get Φ, etc.

Γ Δ Θ Λ Ξ Π Σ Υ	Φ Ψ Ω	ff fi fl ffi ffl	ı j	˘ ˇ ˘ ˘ ˘ ˘	˘ ˘	β æ œ ø Æ Œ Ø
- ! " # \$ % & ' () * + , - . /	0 1 2 3 4 5 6 7	8 9	:	:	:	ı = ı ?
@ A B C D E F G	H I J K L M N O	P Q R S T U V W	X Y Z	["] ^ ˘
' a b c d e f g	h i j k l m n o	p q r s t u v w	x y z	-	-	" ˘ ˘

Greek Letters, in Math mode (\$\gamma\$, or \$\Gamma\$ for upper case where shown)

α \alpha	ι \iota	ρ \varrho
β \beta	κ \kappa	Σ σ \sigma
Γ γ \gamma	Λ λ \lambda	ς \varsigma
Δ δ \delta	μ \mu	τ \tau
ε \epsilon	ν \nu	Υ υ \upsilon
ε \varepsilon	Ξ ξ \xi	Φ φ \phi
ζ \zeta	ο ο	φ \varphi
η \eta	Π π \pi	χ \chi
Θ θ \theta	ω \varpi	Ψ ψ \psi
ϑ \vartheta	ρ \rho	Ω ω \omega

Miscellaneous special symbols, available in Math mode

\aleph	<code>\aleph</code>	$'$	<code>\prime</code>	\forall	<code>\forall</code>
\hbar	<code>\hbar</code>	\emptyset	<code>\emptyset</code>	\exists	<code>\exists</code>
\imath	<code>\imath</code>	∇	<code>\nabla</code>	\neg	<code>\neg</code>
\jmath	<code>\jmath</code>	\surd	<code>\surd</code>	\flat	<code>\flat</code>
ℓ	<code>\ell</code>	\top	<code>\top</code>	\natural	<code>\natural</code>
\wp	<code>\wp</code>	\perp	<code>\perp</code>	\sharp	<code>\sharp</code>
\Re	<code>\Re</code>	\parallel	<code>\parallel</code>	\clubsuit	<code>\clubsuit</code>
\Im	<code>\Im</code>	\sphericalangle	<code>\sphericalangle</code>	\diamondsuit	<code>\diamondsuit</code>
∂	<code>\partial</code>	\triangle	<code>\triangle</code>	\heartsuit	<code>\heartsuit</code>
∞	<code>\infty</code>	\backslash	<code>\backslash</code>	\spadesuit	<code>\spadesuit</code>

Binary operators (in addition to $+$, $-$, and $*$) available in Math mode

\pm	<code>\pm</code>	\cap	<code>\cap</code>	\vee	<code>\vee</code>
\mp	<code>\mp</code>	\cup	<code>\cup</code>	\wedge	<code>\wedge</code>
\setminus	<code>\setminus</code>	\oplus	<code>\oplus</code>	\oplus	<code>\oplus</code>
\cdot	<code>\cdot</code>	\sqcap	<code>\sqcap</code>	\ominus	<code>\ominus</code>
\times	<code>\times</code>	\sqcup	<code>\sqcup</code>	\otimes	<code>\otimes</code>
$*$	<code>\ast</code>	\triangleleft	<code>\triangleleft</code>	\oslash	<code>\oslash</code>
$*$	<code>\star</code>	\triangleright	<code>\triangleright</code>	\odot	<code>\odot</code>
\diamond	<code>\diamond</code>	\wr	<code>\wr</code>	\dagger	<code>\dagger</code>
\circ	<code>\circ</code>	\bigcirc	<code>\bigcirc</code>	\ddagger	<code>\ddagger</code>
\bullet	<code>\bullet</code>	\triangleup	<code>\triangleup</code>	\amalg	<code>\amalg</code>
\div	<code>\div</code>	\triangledown	<code>\triangledown</code>		

Relations (in addition to $<$, $>$, and $=$), available in Math mode

\leq	<code>\leq</code>	\geq	<code>\geq</code>	\equiv	<code>\equiv</code>
\prec	<code>\prec</code>	\succ	<code>\succ</code>	\sim	<code>\sim</code>
\preceq	<code>\preceq</code>	\succeq	<code>\succeq</code>	\simeq	<code>\simeq</code>
\ll	<code>\ll</code>	\gg	<code>\gg</code>	\asymp	<code>\asymp</code>
\subset	<code>\subset</code>	\supset	<code>\supset</code>	\approx	<code>\approx</code>
\subseteq	<code>\subseteq</code>	\supseteq	<code>\supseteq</code>	\cong	<code>\cong</code>
\sqsubseteq	<code>\sqsubseteq</code>	\sqsupseteq	<code>\sqsupseteq</code>	\bowtie	<code>\bowtie</code>
\in	<code>\in</code>	\ni	<code>\ni</code>	\propto	<code>\propto</code>
\vdash	<code>\vdash</code>	\dashv	<code>\dashv</code>	\models	<code>\models</code>
\smile	<code>\smile</code>	\mid	<code>\mid</code>	\doteq	<code>\doteq</code>
\frown	<code>\frown</code>	\parallel	<code>\parallel</code>	\perp	<code>\perp</code>

Negated relations (the `\not` symbol is considered to have zero width)

$\not<$	<code>\not<</code>	$\not>$	<code>\not></code>	\neq	<code>\neq</code>
$\not\leq$	<code>\not\leq</code>	$\not\geq$	<code>\not\geq</code>	$\not\equiv$	<code>\not\equiv</code>
$\not\prec$	<code>\not\prec</code>	$\not\succ$	<code>\not\succ</code>	$\not\sim$	<code>\not\sim</code>
$\not\preceq$	<code>\not\preceq</code>	$\not\succeq$	<code>\not\succeq</code>	$\not\simeq$	<code>\not\simeq</code>
$\not\subset$	<code>\not\subset</code>	$\not\supset$	<code>\not\supset</code>	$\not\approx$	<code>\not\approx</code>
$\not\subseteq$	<code>\not\subseteq</code>	$\not\supseteq$	<code>\not\supseteq</code>	$\not\cong$	<code>\not\cong</code>
$\not\sqsubseteq$	<code>\not\sqsubseteq</code>	$\not\sqsupseteq$	<code>\not\sqsupseteq</code>	$\not\asymp$	<code>\not\asymp</code>

Arrows for use in Math mode

\leftarrow	<code>\leftarrow</code>	\longleftarrow	<code>\longleftarrow</code>	\uparrow	<code>\uparrow</code>
\Lleftarrow	<code>\Lleftarrow</code>	\Longleftarrow	<code>\Longleftarrow</code>	\Uparrow	<code>\Uparrow</code>
\rightarrow	<code>\rightarrow</code>	\longrightarrow	<code>\longrightarrow</code>	\downarrow	<code>\downarrow</code>
\Rrightarrow	<code>\Rrightarrow</code>	\Longrightarrow	<code>\Longrightarrow</code>	\Downarrow	<code>\Downarrow</code>
\leftrightarrow	<code>\leftrightarrow</code>	\longleftrightarrow	<code>\longleftrightarrow</code>	\updownarrow	<code>\updownarrow</code>
\Leftrightarrow	<code>\Leftrightarrow</code>	\Longleftrightarrow	<code>\Longleftrightarrow</code>	\Updownarrow	<code>\Updownarrow</code>
\mapsto	<code>\mapsto</code>	\longmapsto	<code>\longmapsto</code>	\nearrow	<code>\nearrow</code>
\searrow	<code>\searrow</code>	\swarrow	<code>\swarrow</code>	\nwarrow	<code>\nwarrow</code>
\hookrightarrow	<code>\hookrightarrow</code>	\hookleftarrow	<code>\hookleftarrow</code>		

Some alternate names used in Math mode

\neq	<code>\ne</code>	{	<code>\{</code>	\wedge	<code>\land</code>	\rightarrow	<code>\to</code>		<code>\vert</code>
\leq	<code>\le</code>	}	<code>\}</code>	\vee	<code>\lor</code>	\leftarrow	<code>\gets</code>		<code>\Vert</code>
\geq	<code>\ge</code>	\ni	<code>\owns</code>	\neg	<code>\not</code>				

Large operators as used in Math ($\$...\$$) and in Math Display ($\$\$ \dots \$\$$) modes

Σ	<code>\sum</code>	\cap	<code>\bigcap</code>	\odot	<code>\bigodot</code>
\prod	<code>\prod</code>	\cup	<code>\bigcup</code>	\otimes	<code>\bigotimes</code>
\coprod	<code>\coprod</code>	\sqcup	<code>\bigsqcup</code>	\oplus	<code>\bigoplus</code>
\int	<code>\int</code>	\vee	<code>\bigvee</code>	\uplus	<code>\biguplus</code>
\oint	<code>\oint</code>	\wedge	<code>\bigwedge</code>		

Extendable delimiters, in addition to () { } [and], used in Display Math mode

\lfloor	<code>\lfloor</code>	\langle	<code>\langle</code>		<code>\vert</code>	\downarrow	<code>\downarrow</code>
\rfloor	<code>\rfloor</code>	\rangle	<code>\rangle</code>		<code>\Vert</code>	\Downarrow	<code>\Downarrow</code>
\lceil	<code>\lceil</code>	/	<code>/</code>	\uparrow	<code>\uparrow</code>	\updownarrow	<code>\updownarrow</code>
\rceil	<code>\rceil</code>	\backslash	<code>\backslash</code>	\Uparrow	<code>\Uparrow</code>	\Updownarrow	<code>\Updownarrow</code>

Function names that print in roman type, for use when in Math mode

<code>\arccos</code>	<code>\cos</code>	<code>\csc</code>	<code>\exp</code>	<code>\ker</code>	<code>\limsup</code>	<code>\min</code>	<code>\sinh</code>
<code>\arcsin</code>	<code>\cosh</code>	<code>\deg</code>	<code>\gcd</code>	<code>\lg</code>	<code>\ln</code>	<code>\Pr</code>	<code>\sup</code>
<code>\arctan</code>	<code>\cot</code>	<code>\det</code>	<code>\hom</code>	<code>\lim</code>	<code>\log</code>	<code>\sec</code>	<code>\tan</code>
<code>\arg</code>	<code>\coth</code>	<code>\dim</code>	<code>\inf</code>	<code>\liminf</code>	<code>\max</code>	<code>\sin</code>	<code>\tanh</code>

Dimensions, preset by PLAIN.TEX, that you may want to change

<code>\hsize=6.5in</code>	<code>\parindent=20pt</code>	<code>\abovedisplayskip=12pt plus 3pt minus 9pt</code>
<code>\vsize=8.9in</code>	<code>\parskip=0pt plus 1pt</code>	<code>\belowdisplayskip=12pt plus 3pt minus 9pt</code>

Macros for setting ordinary text

<code>\frenchspacing</code>	<code>\break</code>	<code>\bigbreak</code>	<code>\hidewidth</code>	<code>\ttraggedright</code>
<code>\nonfrenchspacing</code>	<code>\nobreak</code>	<code>\line</code>	<code>\multispan#1</code>	<code>\leavevmode</code>
<code>\normalbaselines</code>	<code>\allowbreak</code>	<code>\leftline#1</code>	<code>\cleartabs</code>	<code>\hrulefill</code>
<code>\null</code>	<code>\filbreak</code>	<code>\rightline#1</code>	<code>\hang</code>	<code>\dotfill</code>
<code>\obeyspaces</code>	<code>\goodbreak</code>	<code>\centerline#1</code>	<code>\textindent#1</code>	<code>\downbracefill</code>
<code>\loop#1\repeat</code>	<code>\eject</code>	<code>\rlap#1</code>	<code>\item</code>	<code>\upbracefill</code>
<code>\iterate</code>	<code>\supereject</code>	<code>\llap#1</code>	<code>\itemitem</code>	
<code>\nointerlineskip</code>	<code>\smallbreak</code>	<code>\underbar#1</code>	<code>\narrower</code>	
<code>\offinterlineskip</code>	<code>\medbreak</code>	<code>\strut</code>	<code>\raggedright</code>	

Macros for setting math

<code>\joinrel</code>	<code>\vphantom</code>	<code>\openup</code>	<code>\cases#1</code>	<code>\ldots</code>
<code>\relbar</code>	<code>\hphantom</code>	<code>\eqalign#1</code>	<code>\matrix#1</code>	<code>\cdots</code>
<code>\Relbar</code>	<code>\phantom</code>	<code>\displaylines#1</code>	<code>\pmatrix#1</code>	<code>\vdots</code>
<code>\bowtie</code>	<code>\mathstrut</code>	<code>\eqalignno#1</code>	<code>\bordermatrix#1</code>	<code>\ddots</code>
<code>\models</code>	<code>\smash</code>	<code>\leqalignno#1</code>		

Parameters preset by PLAIN.TEX that may be reset, with caution

<code>\vbadness=1000</code>	<code>\tracinglostchars=1</code>	<code>\delimitershortfall=5pt</code>
<code>\linepenalty=10</code>	<code>\uchyph=1</code>	<code>\nulldelimiterspace=1.2pt</code>
<code>\hyphenpenalty=50</code>	<code>\newlinechar=-1</code>	<code>\scriptspace=0.5pt</code>
<code>\exhyphenpenalty=50</code>	<code>\delimiterfactor=901</code>	<code>\parindent=20pt</code>
<code>\binoppenalty=700</code>	<code>\showboxbreadth=5</code>	<code>\parskip=0pt plus 1pt</code>
<code>\relpenalty=500</code>	<code>\showboxdepth=3</code>	<code>\parfillskip=0pt plus 1fil</code>
<code>\hbadness=1000</code>	<code>\adjdemerits=10000</code>	<code>\topskip=10pt</code>
<code>\clubpenalty=150</code>	<code>\hfuzz=0.1pt</code>	<code>\maxdepth=4pt</code>
<code>\widowpenalty=150</code>	<code>\vfuzz=0.1pt</code>	<code>\normalbaselineskip=12pt</code>
<code>\displaywidowpenalty=50</code>	<code>\overfullrule=5pt</code>	<code>\normallineskip=1pt</code>
<code>\brokenpenalty=100</code>	<code>\hsize=6.5in</code>	<code>\jot=3pt</code>
<code>\predisplaypenalty=10000</code>	<code>\vsize=8.9in</code>	<code>\tolerance=200</code>
<code>\doublehyphendemerits=10000</code>	<code>\belowdisplayskip=12pt plus 3pt minus 9pt</code>	
<code>\finalhyphendemerits=5000</code>	<code>\belowdisplayshortskip=7pt plus 3pt minus 4pt</code>	
<code>\thinmuskip=3mu</code>	<code>\smallskipamount=3pt plus 1pt minus 1pt</code>	
<code>\medmuskip=4mu plus 2mu minus 4mu</code>	<code>\medskipamount=6pt plus 2pt minus 2pt</code>	
<code>\thickmuskip=5mu plus 5mu</code>	<code>\bigskipamount=12pt plus 4pt minus 4pt</code>	
<code>\interdisplaylinepenalty=100</code>	<code>\abovedisplayskip=12pt plus 3pt minus 9pt</code>	
<code>\interfootnotelinepenalty=100</code>	<code>\abovedisplayshortskip=0pt plus 3pt</code>	

Unassigned parameters, set to zero automatically

<code>\pausing</code>	<code>\tracingparagraphs</code>	<code>\tracingrestores</code>	<code>\spaceskip</code>
<code>\tracingonline</code>	<code>\tracingpages</code>	<code>\leftskip</code>	<code>\hoffset</code>
<code>\tracingmacros</code>	<code>\tracingoutput</code>	<code>\rightskip</code>	<code>\voffset</code>
<code>\tracingstats</code>	<code>\tracingcommands</code>	<code>\tabskip</code>	

Plain T_EX Fonts

Fonts preloaded and named by PLAIN.TEX.

These fonts can be magnified by $\sqrt{1.2}$, 1.2, $(1.2)^2$, $(1.2)^3$, $(1.2)^4$, and $(1.2)^5$, that is, by `\magstephalf`, `\magstep1`, `\magstep2`, `\magstep3`, `\magstep4`, and `\magstep5`. When possible, the font names are in the unmagnified size of the named fonts.

roman text	<code>\tenrm amr10</code>	<code>\sevenrm amr7</code>	<code>\fiverm amr5</code>
boldface extended	<code>\tenbf ambx10</code>	<code>\sevenbf ambx7</code>	<code>\fivebf ambx5</code>
<i>math italic</i>	<code>\teni ammi10</code>	<code>\seveni ammi7</code>	<code>\fivei ammi5</code>
math symbols	<code>\tensy amsy10</code>	<code>\seveny amsy7</code>	<code>\fivesy amsy5</code>
math extension	<code>\tenex amex10</code>		
typewriter	<code>\tentt amtt10</code>		
<i>slanted roman</i>	<code>\tensl amsl10</code>		
<i>text italic</i>	<code>\tenit amti10</code>		

Fonts preloaded by PLAIN.TEX but un-named.

Can be magnified by $\sqrt{1.2}$, 1.2, and $(1.2)^2$ (`\magstephalf`, `\magstep1`, and `\magstep2`). When possible, the descriptive name is in the unmagnified size of the first listed font.

roman text	amr9	amr8	amr6	sans serif	amss10	amss8
<i>math italic</i>	ammi9	ammi8	ammi6	<i>sans serif italic</i>	amssi10	amssi8
math symbols	amsy9	amsy8	amsy6	<i>slanted roman</i>	amsl9	amsl8
boldface extended	ambx9	ambx8	ambx6	typewriter	amtt9	amtt8
<i>text italic</i>	amti9	amti8	amti7	<i>slanted typewriter</i>	amsltt10	
unslanted text italic	amu10			Dunhill style	amdunh10	
bold math italic	ambi10			sans serif bold extended	amssbx10	
bold math symbols	ambsy10			CAPS AND SMALL CAPS	amcsc10	

Fonts preloaded by PLAIN.TEX in magnified form (for titles) but un-named.

amr7 scaled \magstep4
amtt10 scaled \magstep2
amssbx10 scaled \magstep2

(This page was T_EXed separately from the rest of the manual, since it is unmagnified.)